



EVERFLOW

30×30×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 5v U 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 10g

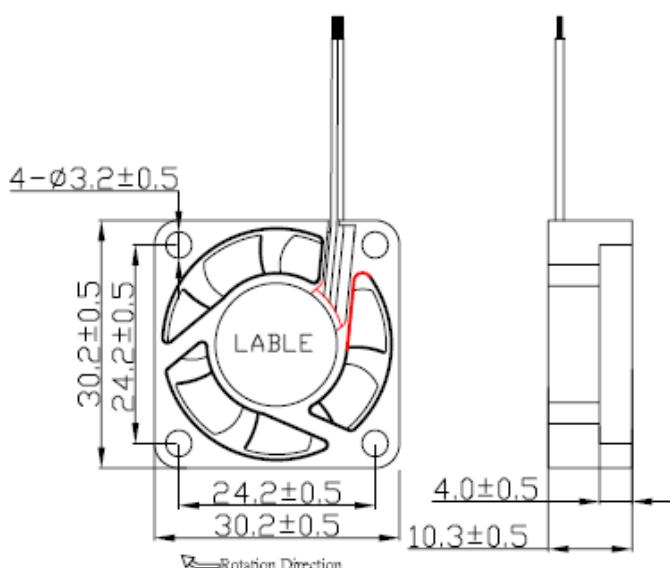

3010套用3510的規規

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

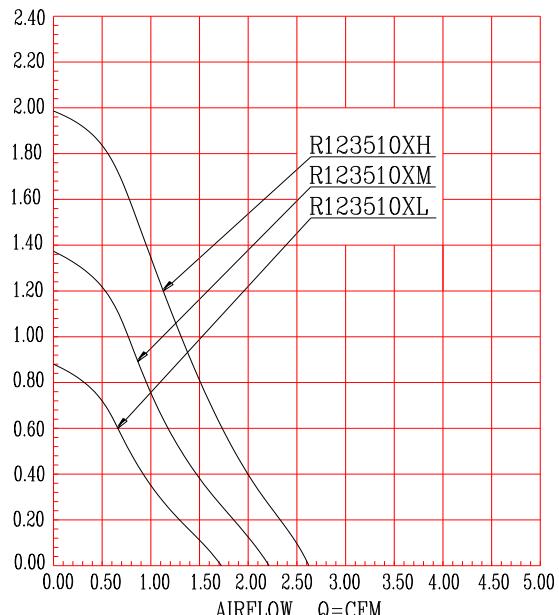

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R123510BL	12	7~13.2	0.16	1.92	6000	2.00	0.05	1.91	26
R123510BM	12	7~13.2	0.18	2.16	7500	2.50	0.07	2.99	31
R123510BH	12	7~13.2	0.25	3.00	9000	3.00	0.08	4.3	35
R123510SL	12	7~13.2	0.16	1.92	6000	2.00	0.05	1.91	26
R123510SM	12	7~13.2	0.18	2.16	7500	2.50	0.07	2.99	31
R123510SH	12	7~13.2	0.25	3.00	9000	3.00	0.08	4.3	35

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

35×35×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5v U 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 10g

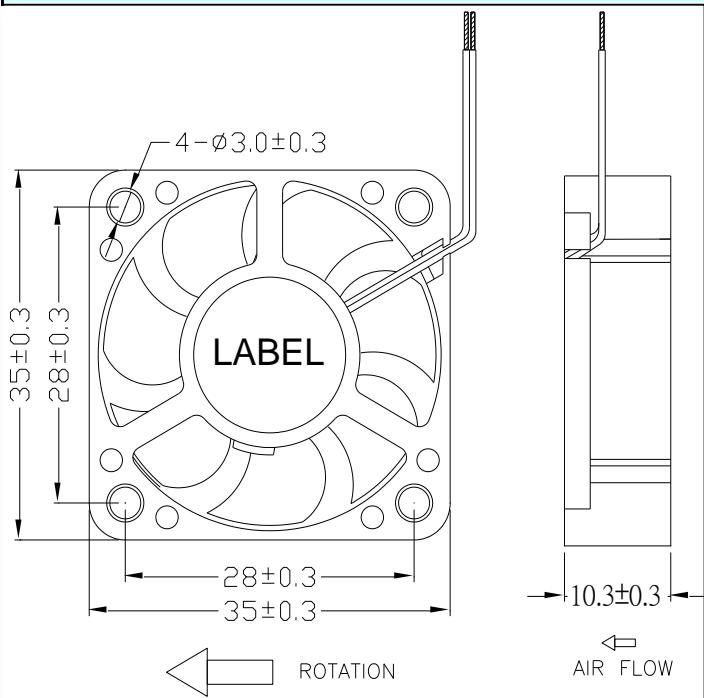

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

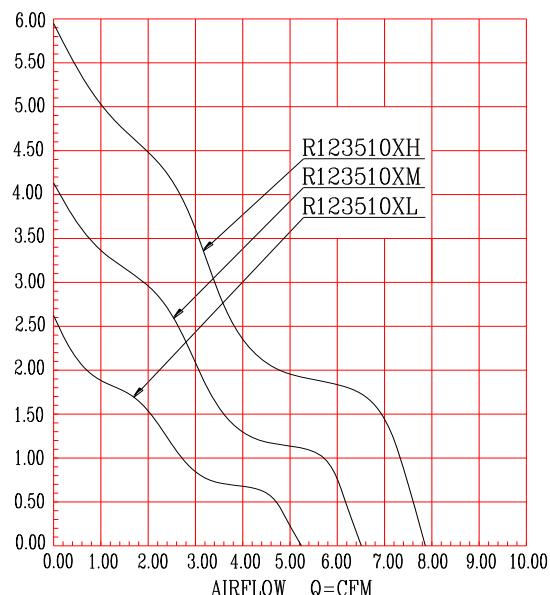

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R123510BL	12	7~13.2	0.16	1.92	6000	5.21	0.15	2.65	22.5
R123510BM	12	7~13.2	0.18	2.16	7500	6.52	0.18	4.15	25.3
R123510BH	12	7~13.2	0.25	3.00	9000	7.82	0.22	5.97	31
R123510SL	12	7~13.2	0.16	1.92	6000	5.21	0.15	2.65	22.5
R123510SM	12	7~13.2	0.18	2.16	7500	6.52	0.18	4.15	25.3
R123510SH	12	7~13.2	0.25	3.00	9000	7.82	0.22	5.97	31

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×7MM SERIES

Bearing Type:

EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 15g

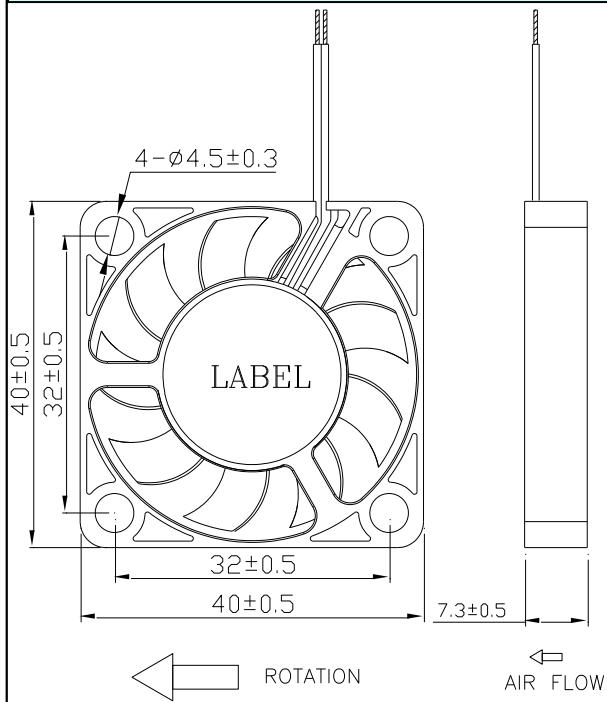

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE (mmH₂O)

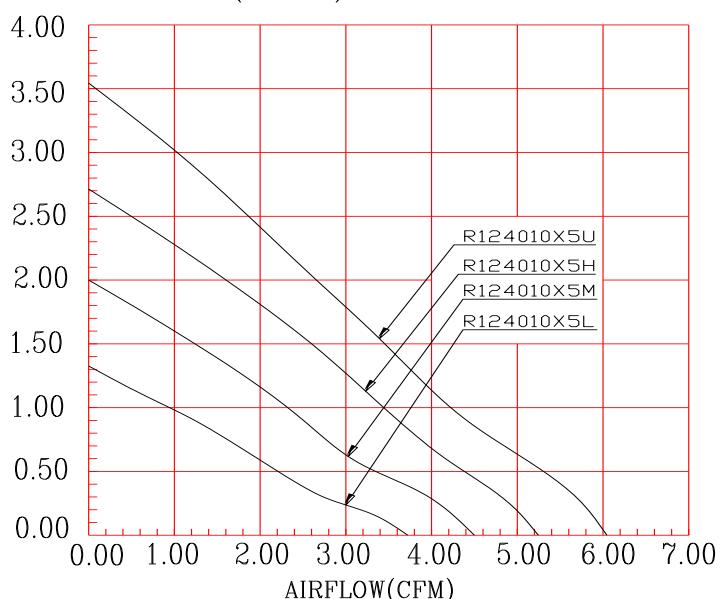

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010SL	12	7~13.2	0.10	1.20	5000	3.77	0.11	1.39	22.6
R124010SM	12	7~13.2	0.12	1.44	6000	4.53	0.13	2.00	25.8
R124010SH	12	7~13.2	0.14	1.68	7000	5.29	0.15	2.72	28.9
R124010SU	12	7~13.2	0.18	2.16	8000	6.05	0.17	3.55	32.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 15g

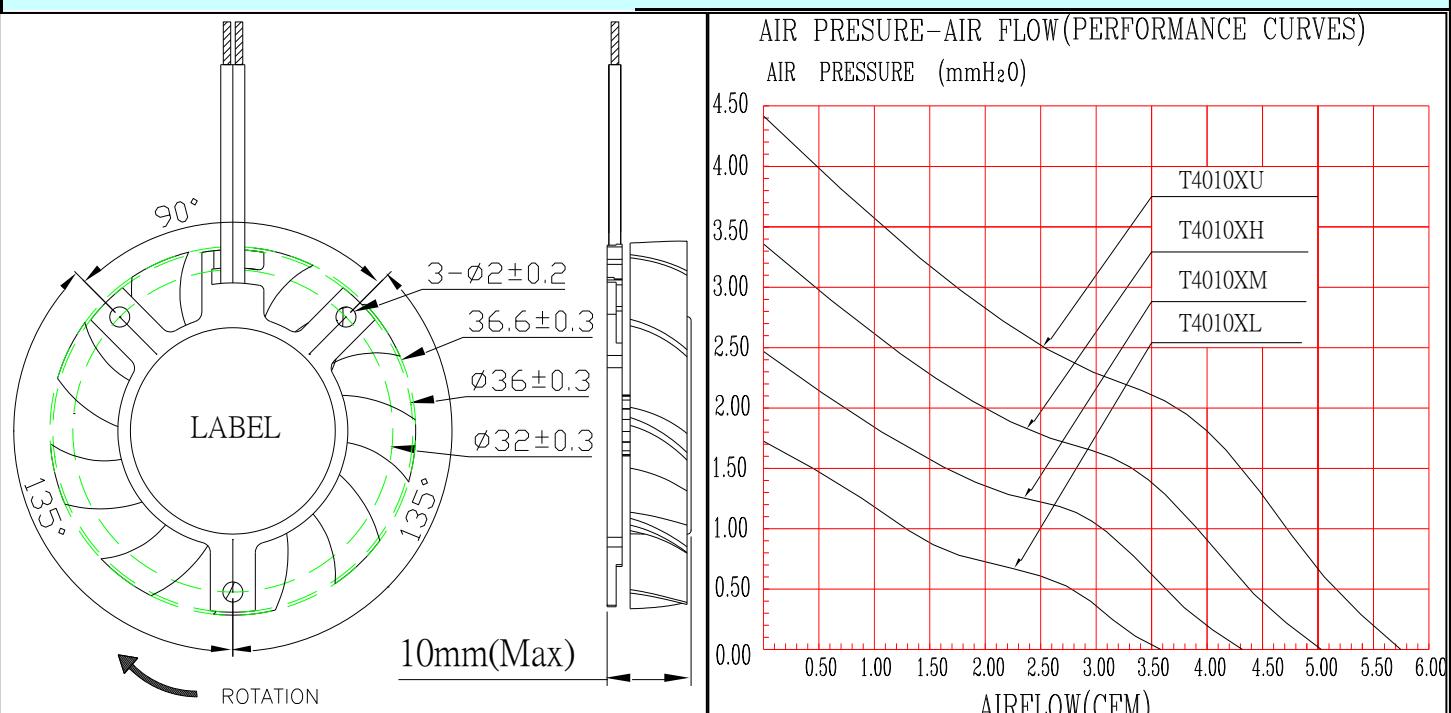

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T124010BL	12	7~13.2	0.10	1.20	5000	3.59	0.10	1.73	24
T124010BM	12	7~13.2	0.12	1.44	6000	4.31	0.12	2.49	26
T124010BH	12	7~13.2	0.14	1.68	7000	5.03	0.14	3.39	28.1
T124010BU	12	7~13.2	0.18	2.16	8000	5.75	0.16	4.42	30.2
T124010SL	12	7~13.2	0.10	1.20	5000	3.59	0.10	1.73	24
T124010SM	12	7~13.2	0.12	1.44	6000	4.31	0.12	2.49	26
T124010SH	12	7~13.2	0.14	1.68	7000	5.03	0.14	3.39	28.1
T124010SU	12	7~13.2	0.18	2.16	8000	5.75	0.16	4.42	30.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×8MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 15g

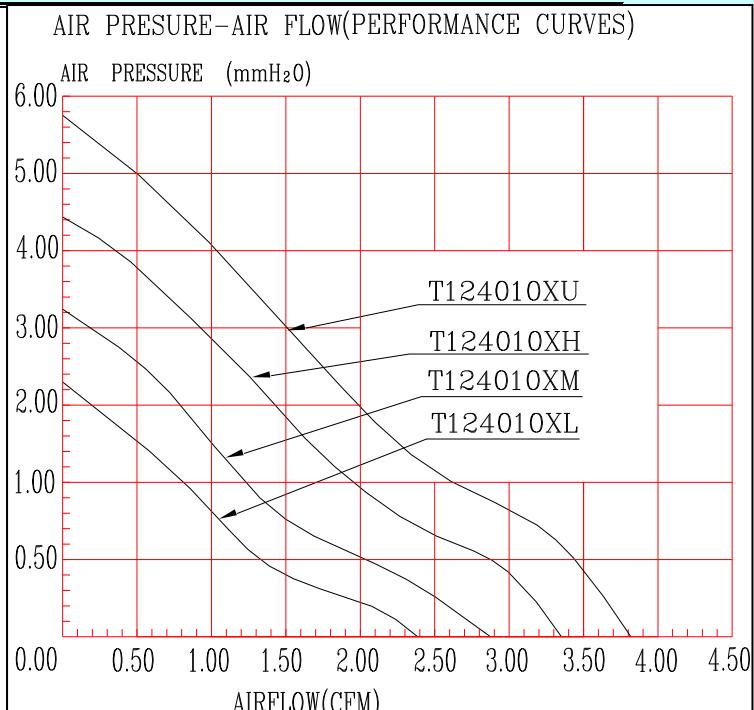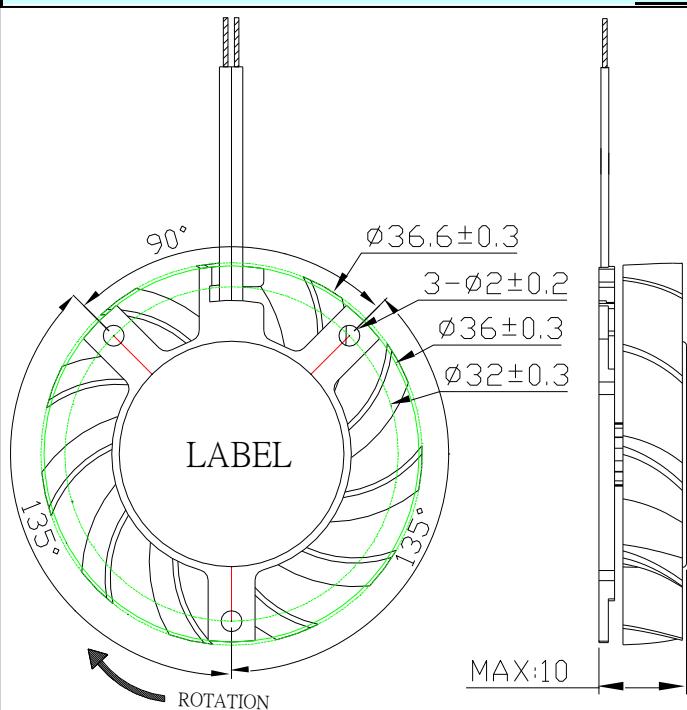

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T124010BL	12	7~13.2	0.10	1.20	5000	2.39	0.07	2.26	27.9
T124010BM	12	7~13.2	0.12	1.44	6000	2.87	0.08	3.23	32.5
T124010BH	12	7~13.2	0.14	1.68	7000	3.34	0.09	4.42	35.2
T124010BU	12	7~13.2	0.18	2.16	8000	3.82	0.11	5.77	38.4
T124010SL	12	7~13.2	0.10	1.20	5000	2.39	0.07	2.26	27.9
T124010SM	12	7~13.2	0.12	1.44	6000	2.87	0.08	3.23	32.5
T124010SH	12	7~13.2	0.14	1.68	7000	3.34	0.09	4.42	35.2
T124010SU	12	7~13.2	0.18	2.16	8000	3.82	0.11	5.77	38.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 12g

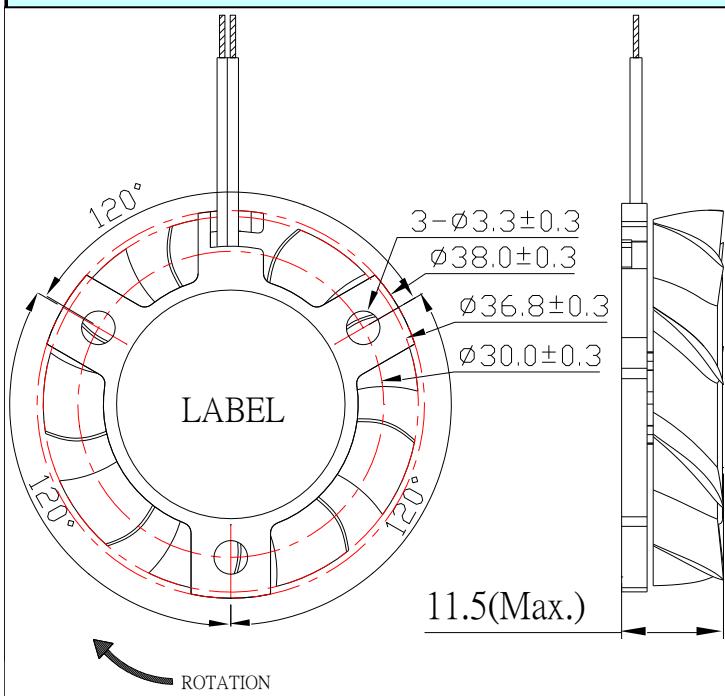

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

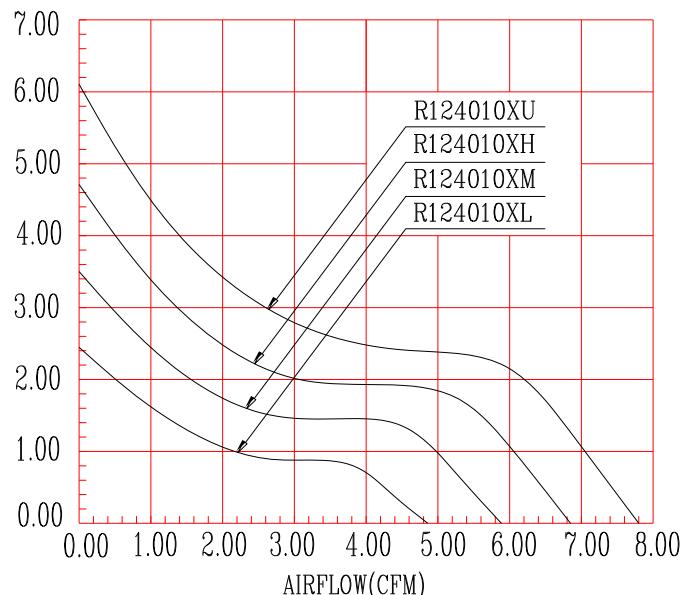

此款孔徑有2.3MM 跟3.3MM

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010BM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010BH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010BU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7
R124010SL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010SM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010SH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010SU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing
EBR


Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C


Weight : 15g

Rated Voltage: 5V/12V

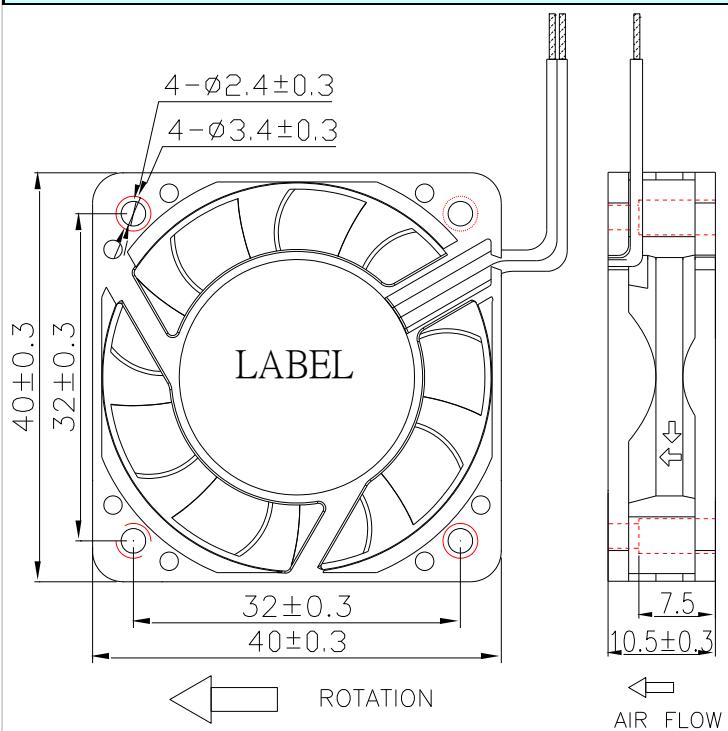

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

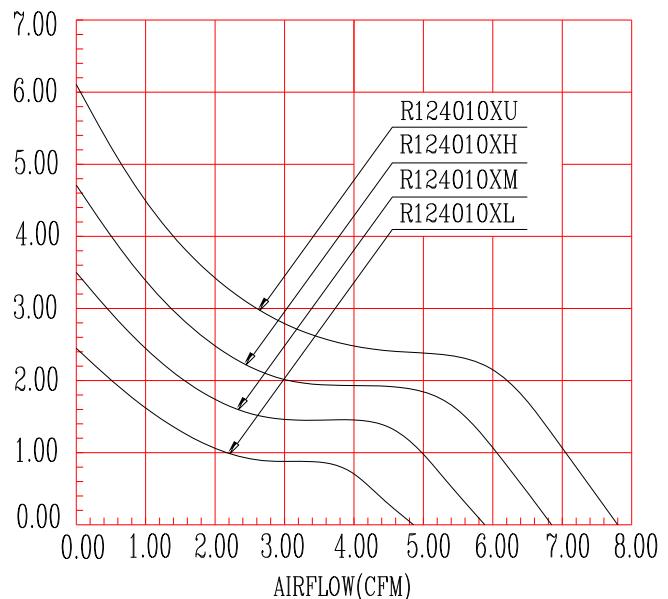

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010BM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010BH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010BU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7
R124010SL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010SM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010SH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010SU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 15g

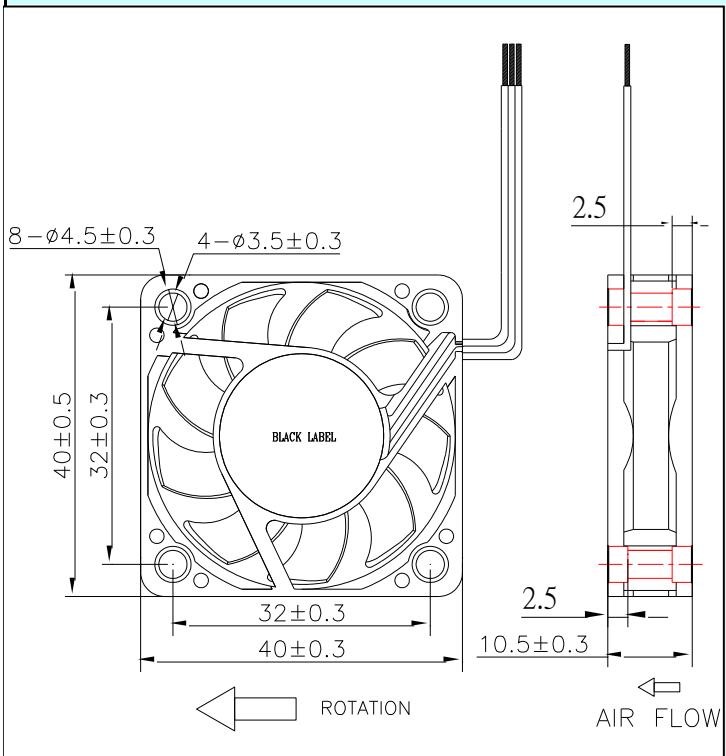

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

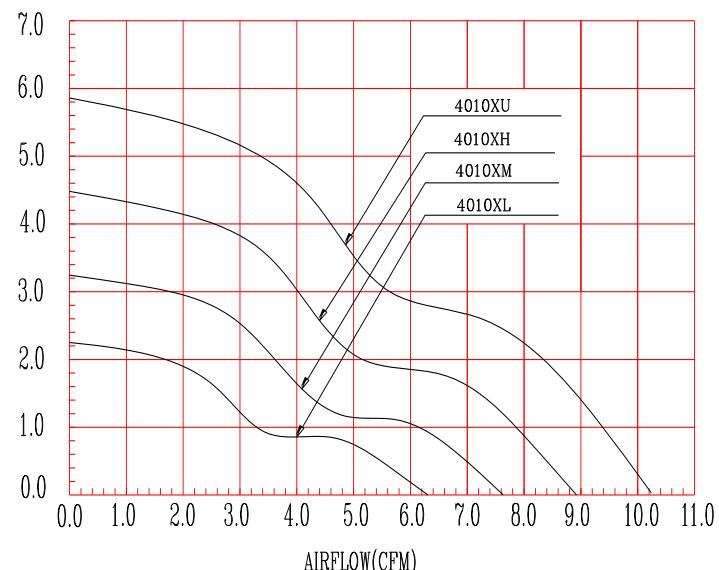

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	6.38	0.18	2.27	23.5
R124010BM	12	7~13.2	0.12	1.44	6000	7.66	0.22	3.27	28.3
R124010BH	12	7~13.2	0.14	1.68	7000	8.94	0.25	4.45	34.2
R124010BU	12	7~13.2	0.18	2.16	8000	10.22	0.29	5.81	36.3
R124010SL	12	7~13.2	0.10	1.20	5000	6.38	0.18	2.27	23.5
R124010SM	12	7~13.2	0.12	1.44	6000	7.66	0.22	3.27	28.3
R124010SH	12	7~13.2	0.14	1.68	7000	8.94	0.25	4.45	34.2
R124010SU	12	7~13.2	0.18	2.16	8000	10.22	0.29	5.81	36.3
					9000	11.50	0.33	7.35	40.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

40×40×10MM SERIES

Bearing Type: Two ball bearing

EBR


Rated Voltage: 5V/12V

Material : Housing Plastic (UL : 94V-0)
Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 15g

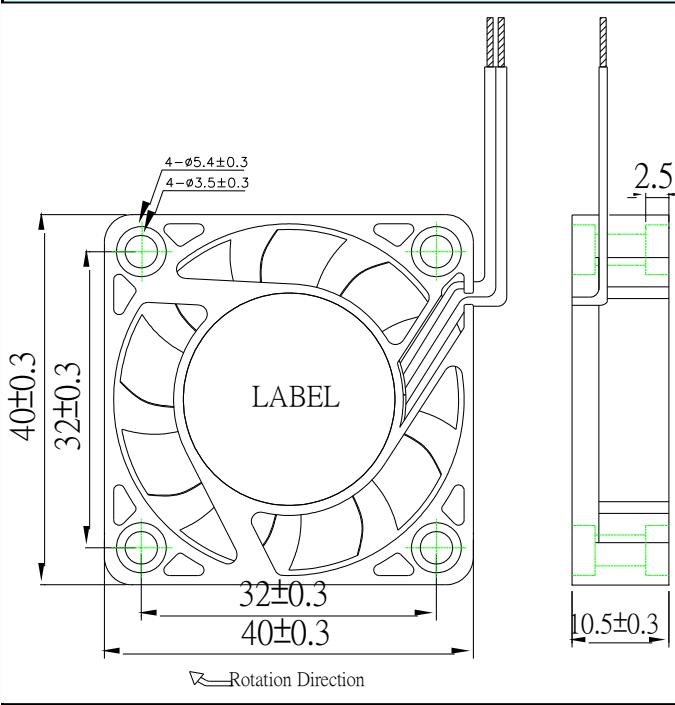

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

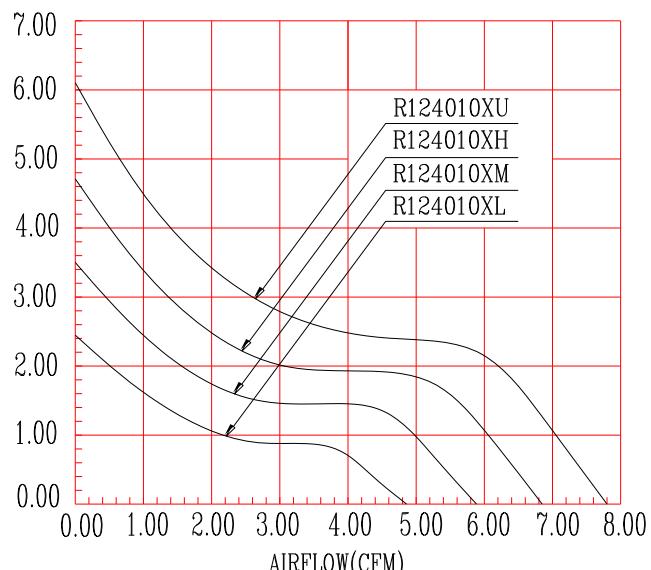

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010BM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010BH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010BU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7
R124010SL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010SM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010SH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010SU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 15g

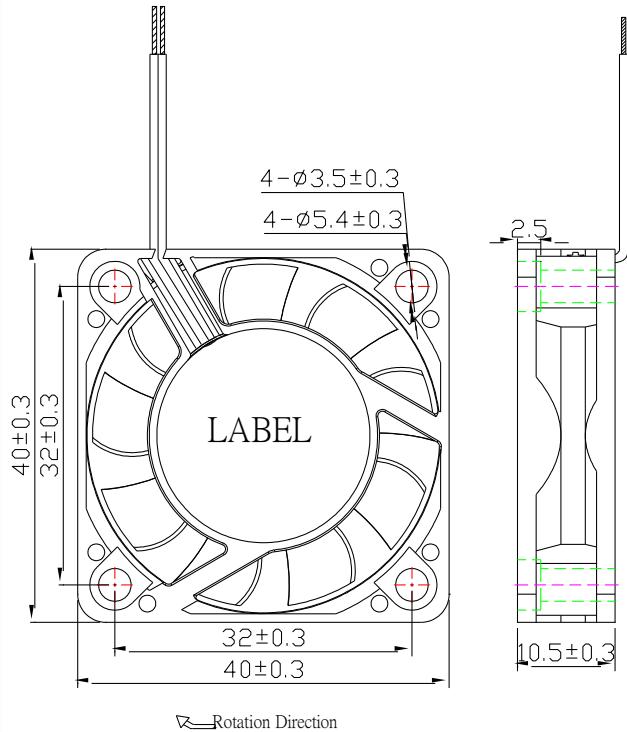

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

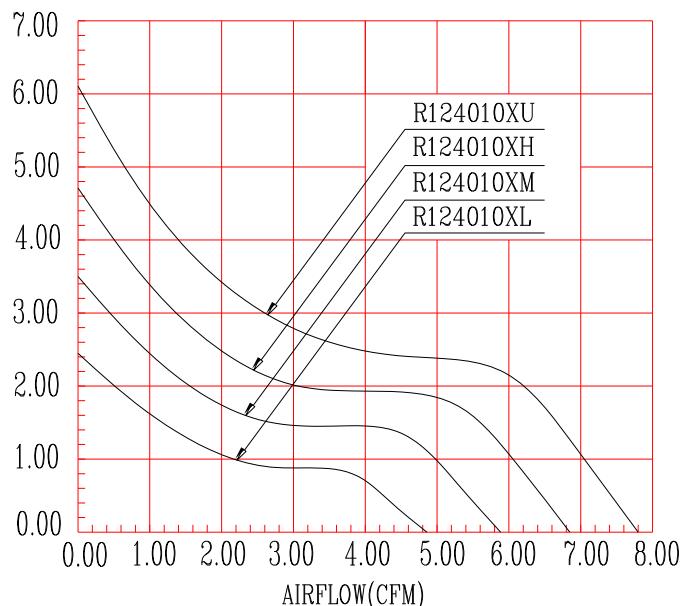

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124010BL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010BM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010BH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010BU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7
R124010SL	12	7~13.2	0.10	1.20	5000	4.87	0.14	2.41	23.2
R124010SM	12	7~13.2	0.12	1.44	6000	5.85	0.17	3.46	26.9
R124010SH	12	7~13.2	0.14	1.68	7000	6.82	0.19	4.72	30.4
R124010SU	12	7~13.2	0.18	2.16	8000	7.80	0.22	6.16	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 30g

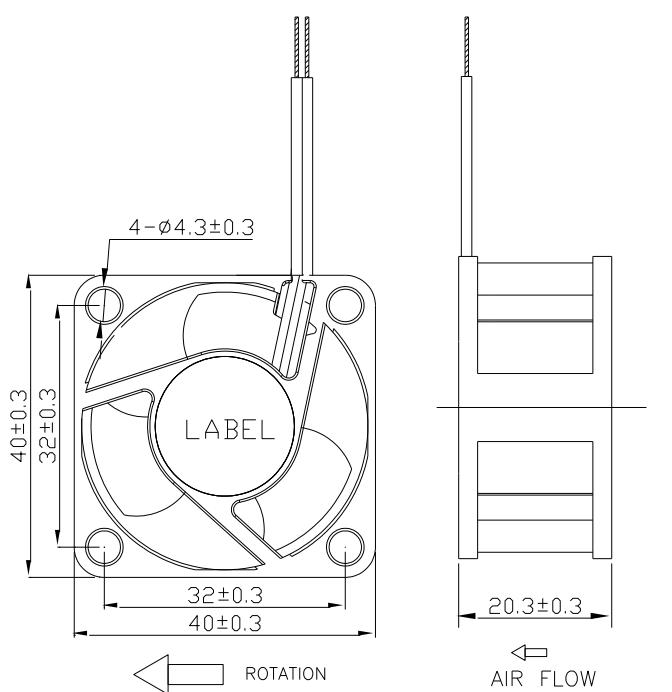

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

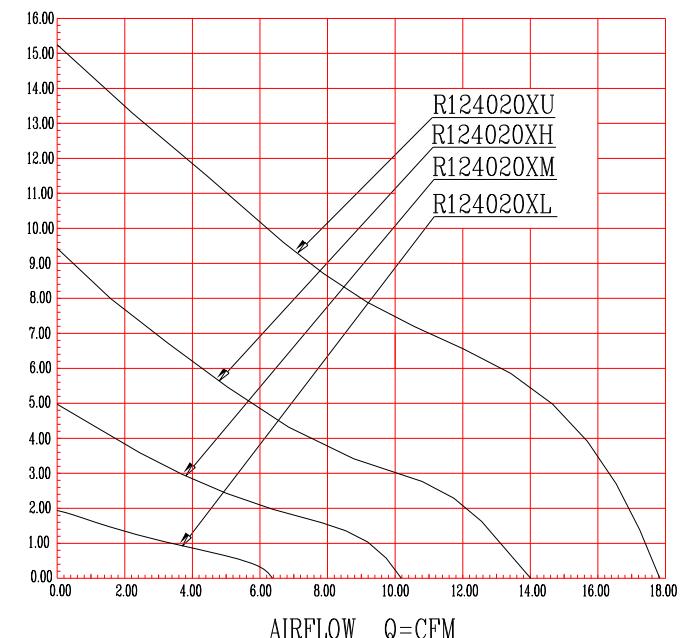

此款模具我司目前有4.3mm 3.6mm的螺絲孔徑.

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124020BL	12	7~13.2	0.13	1.56	5000	6.37	0.18	1.94	26
R124020BM	12	7~13.2	0.16	1.92	8000	10.19	0.29	4.98	38
R124020BH	12	7~13.2	0.23	2.76	11000	14.01	0.40	9.41	46
R124020BU	12	7~13.2	0.45	5.4	14000	17.83	0.51	15.24	56
R104020SL	12	7~13.2	0.13	1.56	5000	6.37	0.18	1.94	26
R124020SM	12	7~13.2	0.16	1.92	8000	10.19	0.29	4.98	38
R124020SH	12	7~13.2	0.23	2.76	11000	14.01	0.40	9.41	46
R124020SU	12	7~13.2	0.45	5.4	14000	17.83	0.51	15.24	56

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

40×40×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 30g

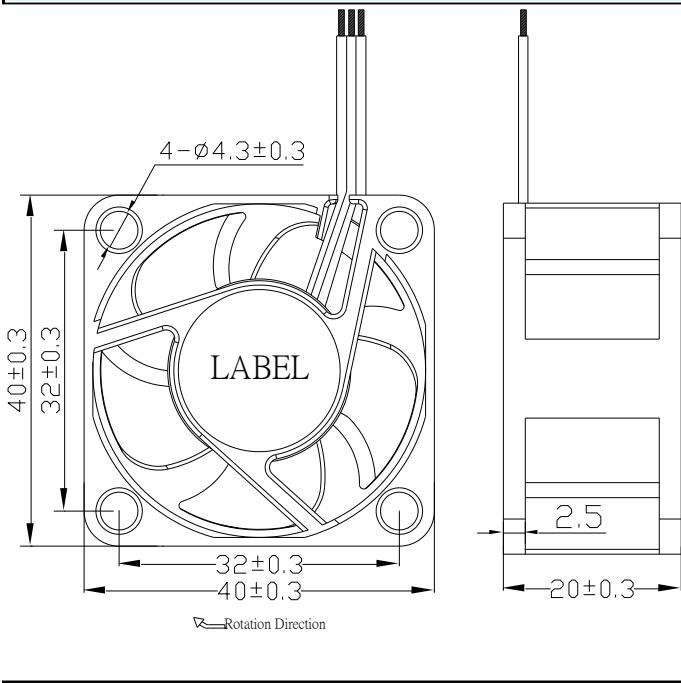

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

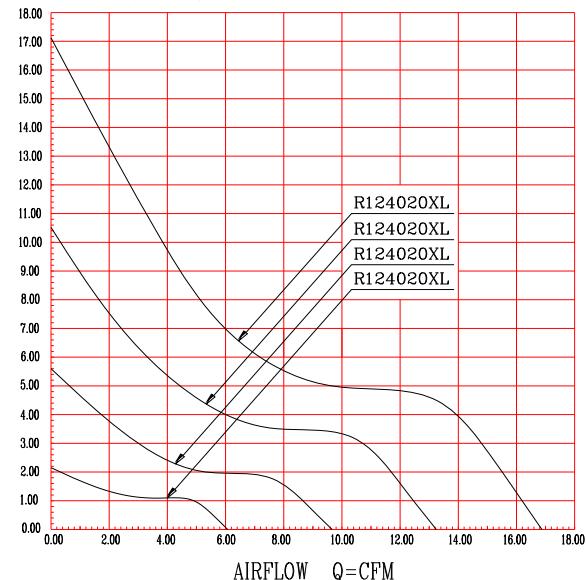

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124020BL	12	7~13.2	0.13	1.56	5000	6.01	0.17	2.19	24.5
R124020BM	12	7~13.2	0.16	1.92	8000	9.61	0.27	5.60	34.8
R124020BH	12	7~13.2	0.23	2.76	11000	13.21	0.37	10.59	45.4
R124020BU	12	7~13.2	0.45	5.4	14000	16.82	0.48	17.16	49.4
R104020SL	12	7~13.2	0.13	1.56	5000	6.01	0.17	2.19	24.5
R124020SM	12	7~13.2	0.16	1.92	8000	9.61	0.27	5.60	34.8
R124020SH	12	7~13.2	0.23	2.76	11000	13.21	0.37	10.59	45.4
R124020SU	12	7~13.2	0.45	5.4	14000	16.82	0.48	17.16	49.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

40×40×28MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 31g

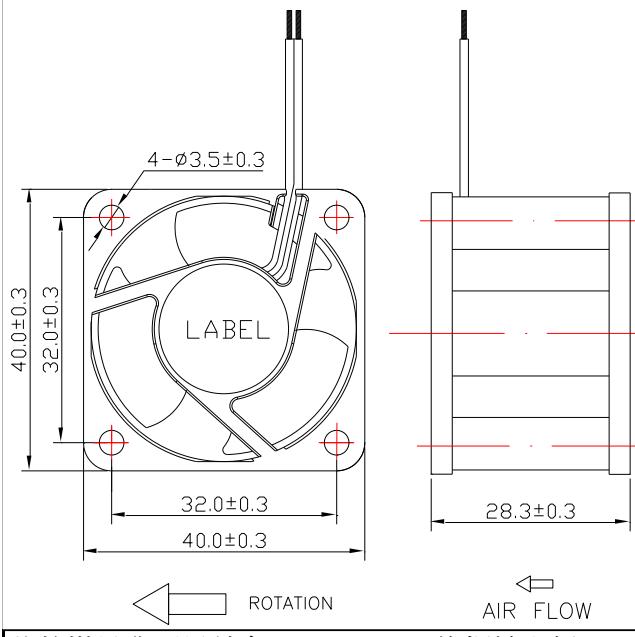

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

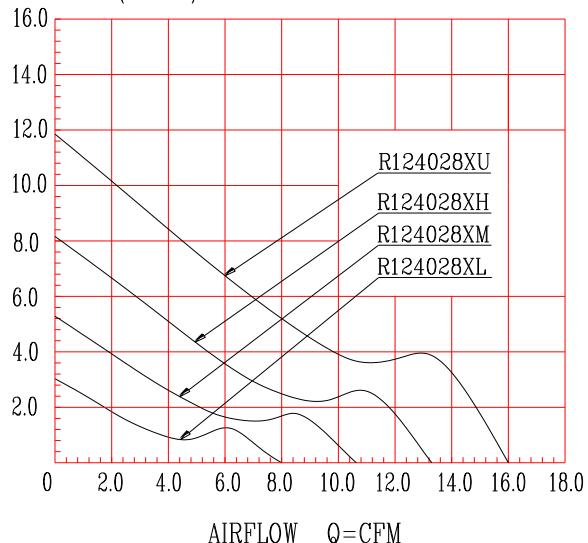

此款模具有我司目前有4.3mm 3.5mm的螺絲孔徑。

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124028BL	12	7~13.2	0.15	1.8	6000	8.00	0.23	2.95	26.9
R124028BM	12	7~13.2	0.18	2.16	8000	10.66	0.30	5.24	33.9
R124028BH	12	7~13.2	0.28	3.36	10000	13.33	0.38	8.18	39.9
R124028BU	12	7~13.2	0.40	4.8	12000	16.00	0.45	11.78	43.5
R124028SL	12	7~13.2	0.15	1.8	6000	8.00	0.23	2.95	26.9
R124028SM	12	7~13.2	0.18	2.16	8000	10.66	0.30	5.24	33.9
R124028SH	12	7~13.2	0.28	3.36	10000	13.33	0.38	8.18	39.9
R124028SU	12	7~13.2	0.40	4.8	12000	16.00	0.45	11.78	43.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

40×40×28MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 32g

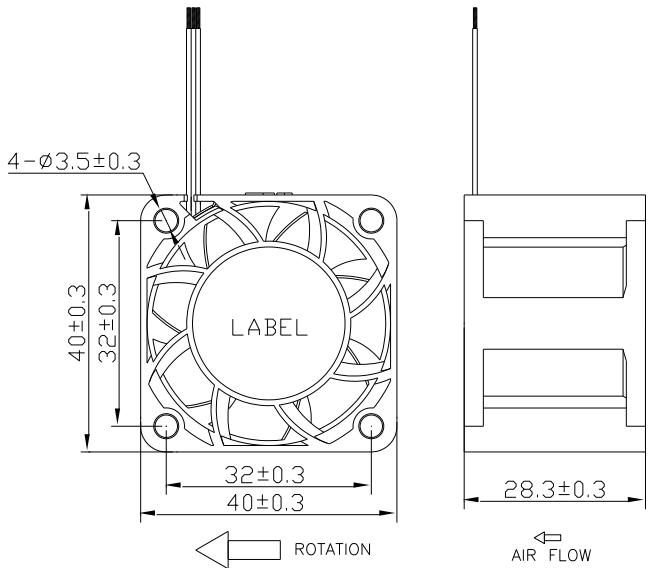

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

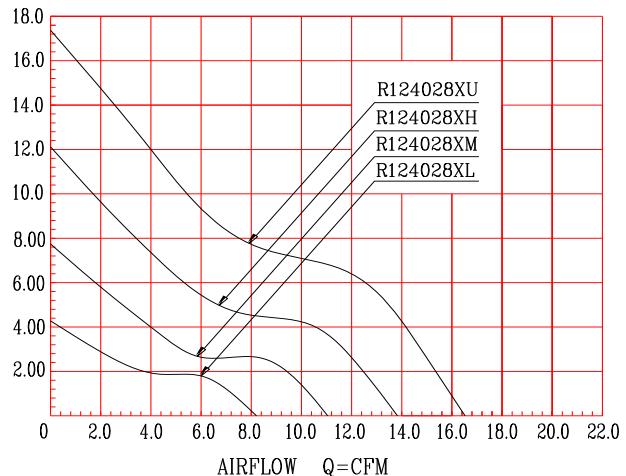

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124028BL	12	7~13.2	0.15	1.80	6000	8.28	0.23	4.37	32
R124028BM	12	7~13.2	0.18	2.16	8000	11.04	0.31	7.76	38.4
R124028BH	12	7~13.2	0.28	3.36	10000	13.80	0.39	12.13	43.4
R124028BU	12	7~13.2	0.40	4.80	12000	16.56	0.47	17.46	48.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

40×40×56MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 77g

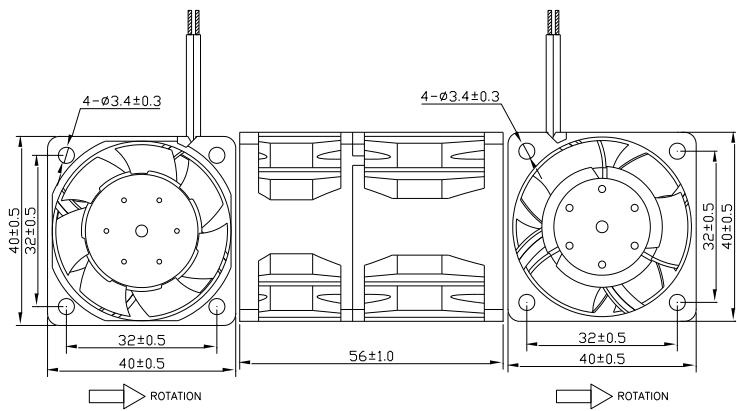

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

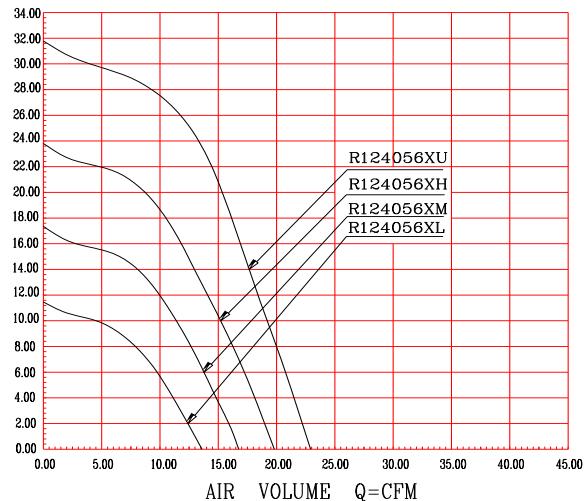

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R124056BL	12	7~13.2	0.60	7.2	9000	13.79	0.39	11.48	48.8
R124056BM	12	7~13.2	0.90	10.8	11000	16.86	0.48	17.15	52.3
R124056BH	12	7~13.2	1.20	14.4	13000	19.92	0.56	23.96	56.5
R124056BU	12	7~13.2	1.50	18	15000	22.99	0.65	31.90	57.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

45×45×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

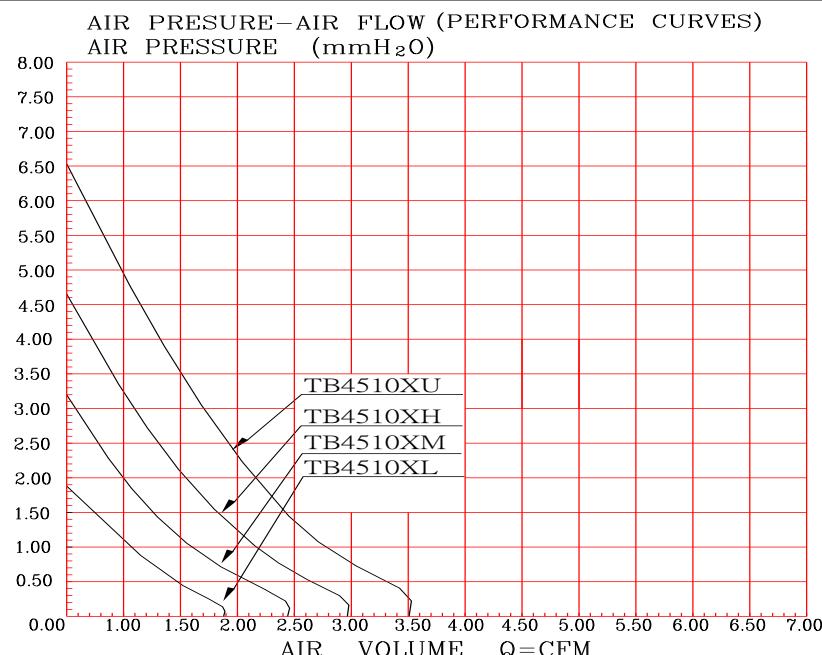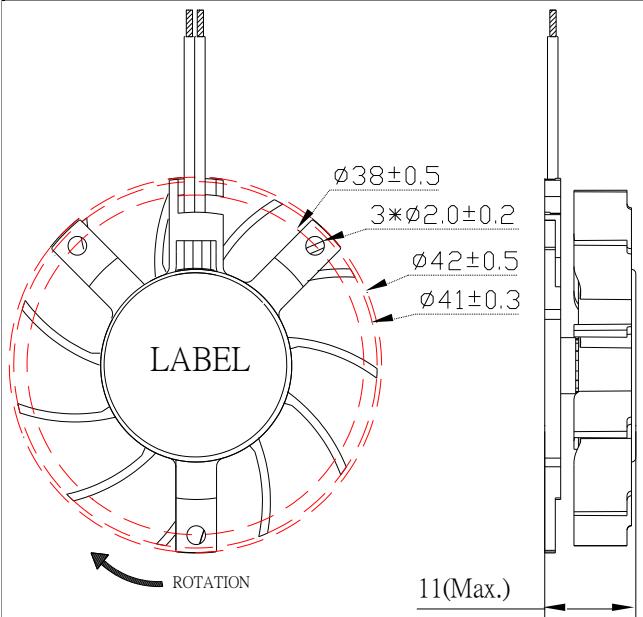

此基架有:有卡扣及無卡扣(直通式)

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010BL	12	7~13.2	0.13	1.56	3500	1.89	0.05	1.89	26.4
T125010BM	12	7~13.2	0.15	1.80	4500	2.43	0.07	3.12	32.1
T125010BH	12	7~13.2	0.25	3.00	5500	2.97	0.08	4.66	38
T125010BU	12	7~13.2	0.32	3.84	6500	3.51	0.10	6.51	38.9
T125010SL	12	7~13.2	0.13	1.56	3500	1.89	0.05	1.89	26.4
T125010SM	12	7~13.2	0.15	1.80	4500	2.43	0.07	3.12	32.1
T125010SH	12	7~13.2	0.25	3.00	5500	2.97	0.08	4.66	38
T125010SU	12	7~13.2	0.32	3.84	6500	3.51	0.10	6.51	38.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 10g

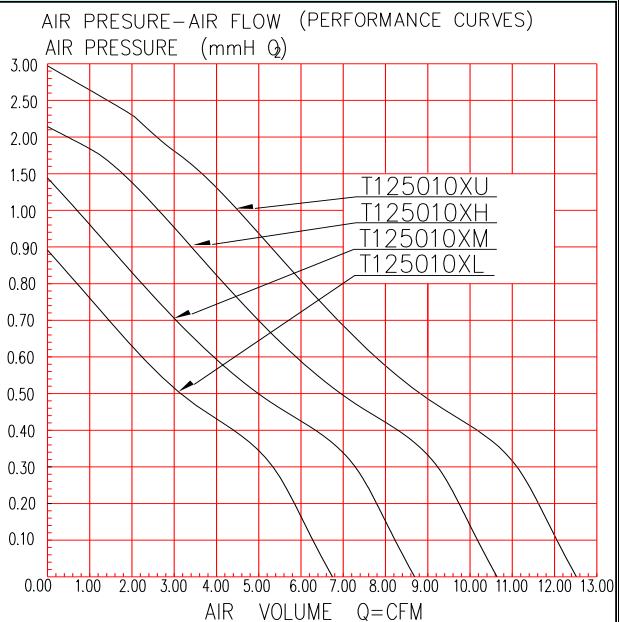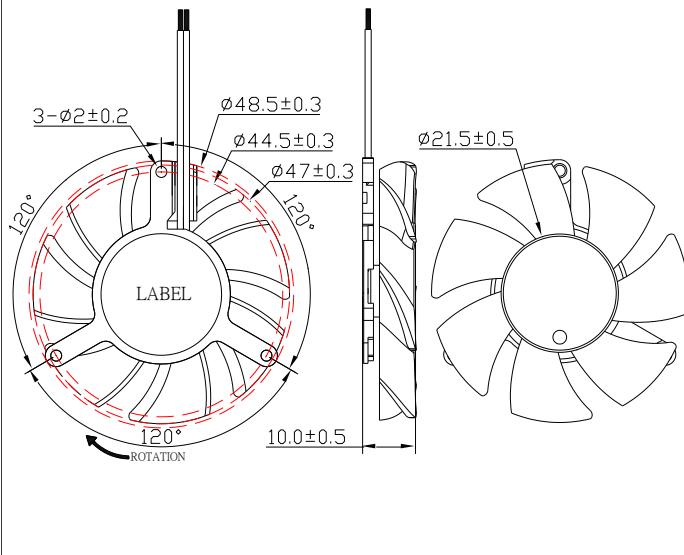

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010BL	12	7~13.2	0.13	1.56	3500	6.74	0.19	0.87	21
T125010BM	12	7~13.2	0.15	1.80	4500	8.68	0.25	1.44	
T125010BH	12	7~13.2	0.25	3.00	5500	10.61	0.30	2.14	
T125010BU	12	7~13.2	0.32	3.84	6500	12.53	0.36	2.99	
T125010SL	12	7~13.2	0.13	1.56	3500	6.74	0.19	0.87	21
T125010SM	12	7~13.2	0.15	1.80	4500	8.68	0.25	1.44	
T125010SH	12	7~13.2	0.25	3.00	5500	10.61	0.30	2.14	
T125010SU	12	7~13.2	0.32	3.84	6500	12.53	0.36	2.99	

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 10g

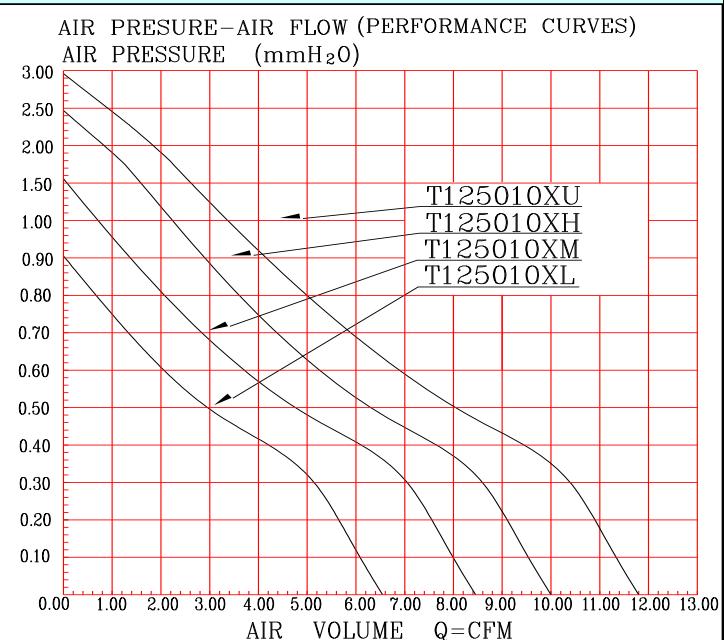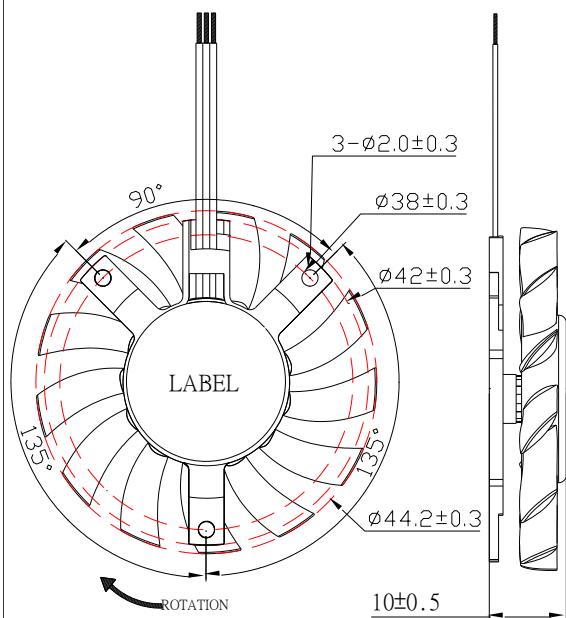

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010BL	12	7~13.2	0.13	1.56	3500	6.57	0.19	0.94	24.5
T125010BM	12	7~13.2	0.15	1.80	4500	8.45	0.24	1.55	29
T125010BH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	34
T125010BU	12	7~13.2	0.32	3.84	6500	11.8	0.33	2.98	40
T125010SL	12	7~13.2	0.13	1.56	3500	6.57	0.19	0.94	24.5
T125010SM	12	7~13.2	0.15	1.80	4500	8.45	0.24	1.55	29
T125010SH	12	7~13.2	0.25	3.00	5500	10.00	0.28	2.49	34
T125010SU	12	7~13.2	0.32	3.84	6500	11.8	0.33	2.98	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5V/12V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

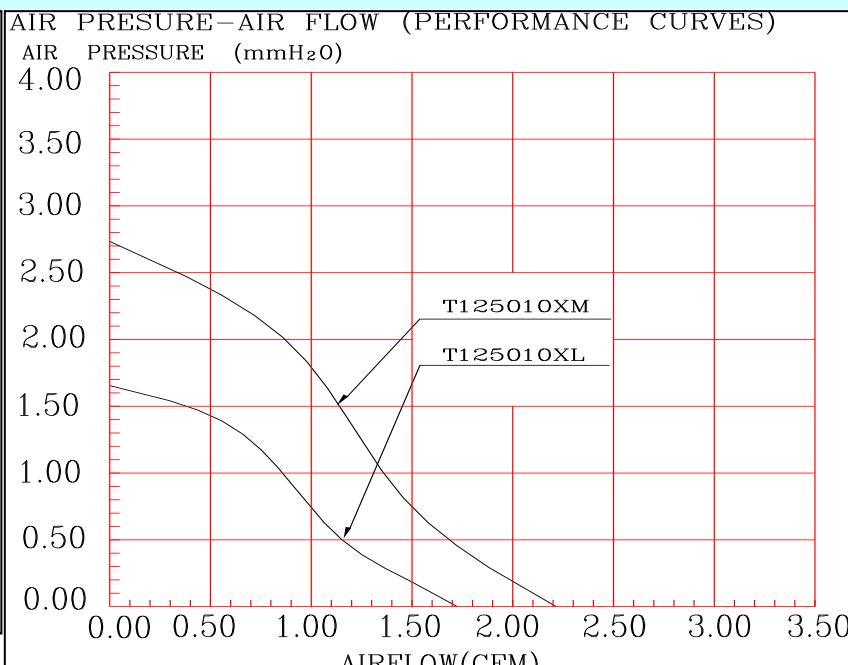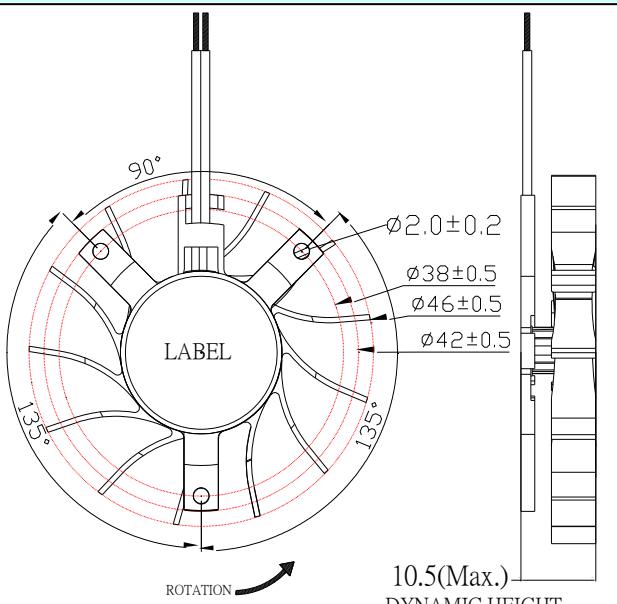

此基架有:有卡扣及無卡扣(直通式)

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T125010SL	12	7~13.2	0.13	1.56	3500	1.73	0.05	1.66	26
T125010SM	12	7~13.2	0.15	1.80	4500	2.23	0.06	2.74	34
T125010BL	12	7~13.2	0.13	1.56	3500	1.73	0.05	1.66	26
T125010BM	12	7~13.2	0.15	1.80	4500	2.23	0.06	2.74	34

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 20g

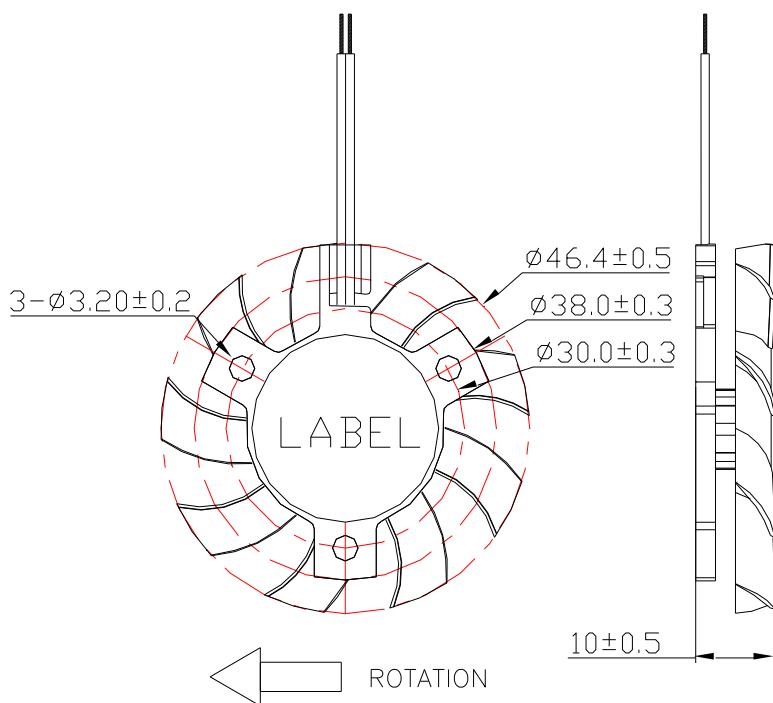

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

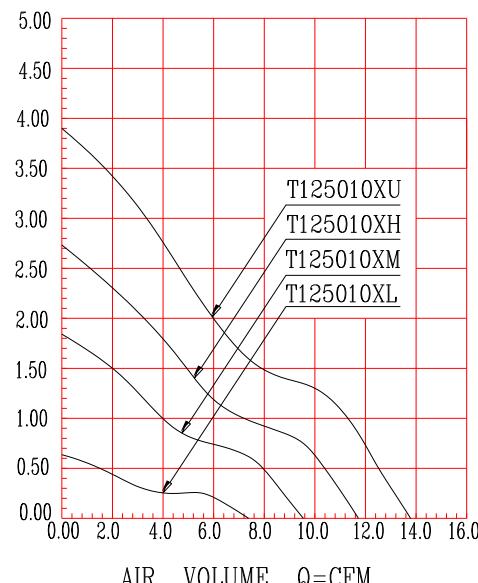

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R125010BL	12	7~13.2	0.13	1.56	3500	7.45	0.21	0.61	21.1
R125010BM	12	7~13.2	0.15	1.80	4500	9.58	0.27	1.87	25.7
R125010BH	12	7~13.2	0.25	3.00	5500	11.71	0.33	2.79	30.1
R125010BU	12	7~13.2	0.32	3.84	6500	13.84	0.39	3.90	34.7
R125010SL	12	7~13.2	0.13	1.56	3500	7.45	0.21	0.61	21.1
R125010SM	12	7~13.2	0.15	1.80	4500	9.58	0.27	1.87	25.7
R125010SH	12	7~13.2	0.25	3.00	5500	11.71	0.33	2.79	30.1
R125010SU	12	7~13.2	0.32	3.84	6500	13.84	0.39	3.90	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

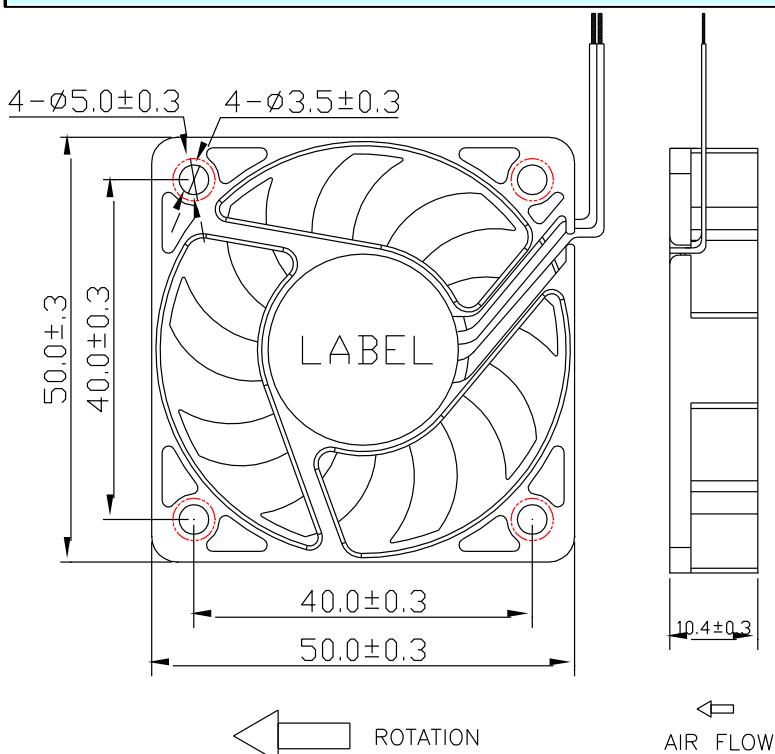

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)



AIR VOLUME Q=CFM

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R125010SL	12	7~13.2	0.13	1.56	3500	7.45	0.21	0.61	21.1
R125010SM	12	7~13.2	0.15	1.80	4500	9.58	0.27	1.87	25.7
R125010SH	12	7~13.2	0.25	3.00	5500	11.71	0.33	2.79	30.1
R125010SU	12	7~13.2	0.32	3.84	6500	13.84	0.39	3.90	34.7
R125010BL	12	7~13.2	0.13	1.56	3500	7.45	0.21	0.61	21.1
R125010BM	12	7~13.2	0.15	1.80	4500	9.58	0.27	1.87	25.7
R125010BH	12	7~13.2	0.25	3.00	5500	11.71	0.33	2.79	30.1
R125010BU	12	7~13.2	0.32	3.84	6500	13.84	0.39	3.90	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×11MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 24g

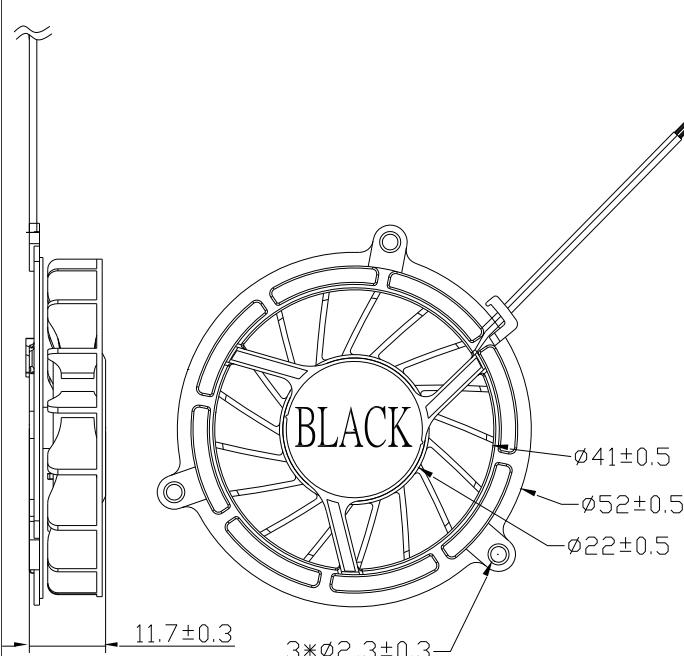

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

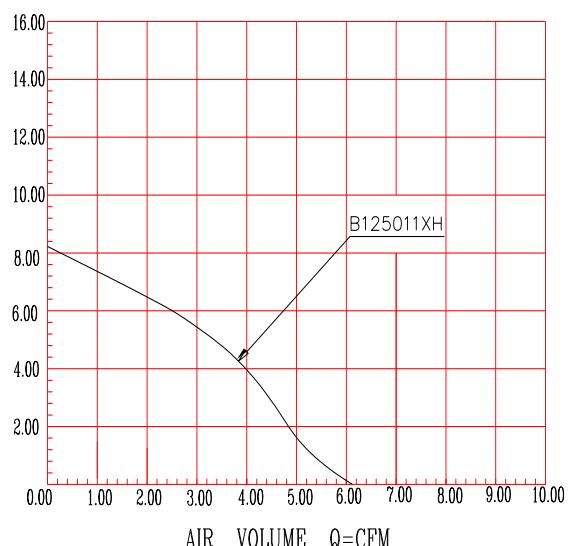

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B125011BH (In Module)	12	7~13.2	0.35	4.20	3500	6.16	0.17	8.28	29.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

50×50×15MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 30g

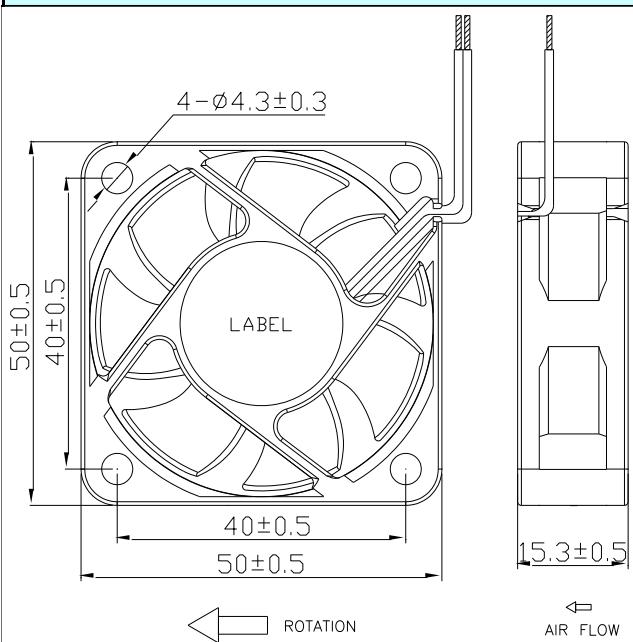

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

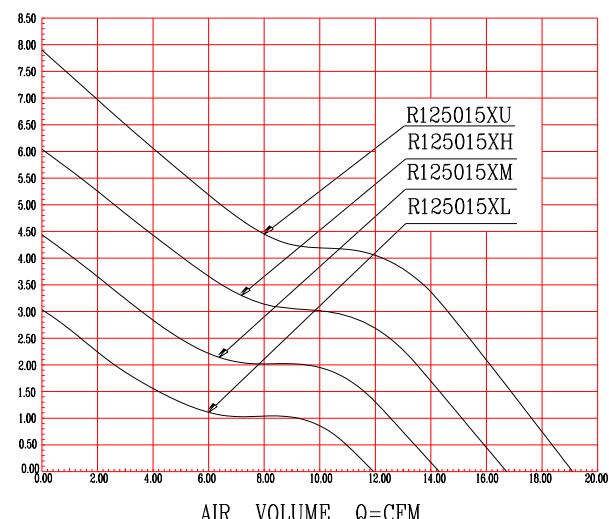

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R125015BL	12	7~13.2	0.20	2.40	5000	11.97	0.34	3.08	26.5
R125015BM	12	7~13.2	0.25	3.00	6000	14.36	0.41	4.44	30.2
R125015BH	12	7~13.2	0.32	3.84	7000	16.76	0.47	6.05	35.3
R125015BU	12	7~13.2	0.60	7.20	8000	19.15	0.54	7.90	39.3
R125015SL	12	7~13.2	0.20	2.40	5000	11.97	0.34	3.08	26.5
R125015SM	12	7~13.2	0.25	3.00	6000	14.36	0.41	4.44	30.2
R125015SH	12	7~13.2	0.32	3.84	7000	16.76	0.47	6.05	35.3
R125015SU	12	7~13.2	0.60	7.20	8000	19.15	0.54	7.90	39.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

EVERFLOW

50×50×20MM SERIES

Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing

EBR


Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 28g

Rated Voltage 12V/24V

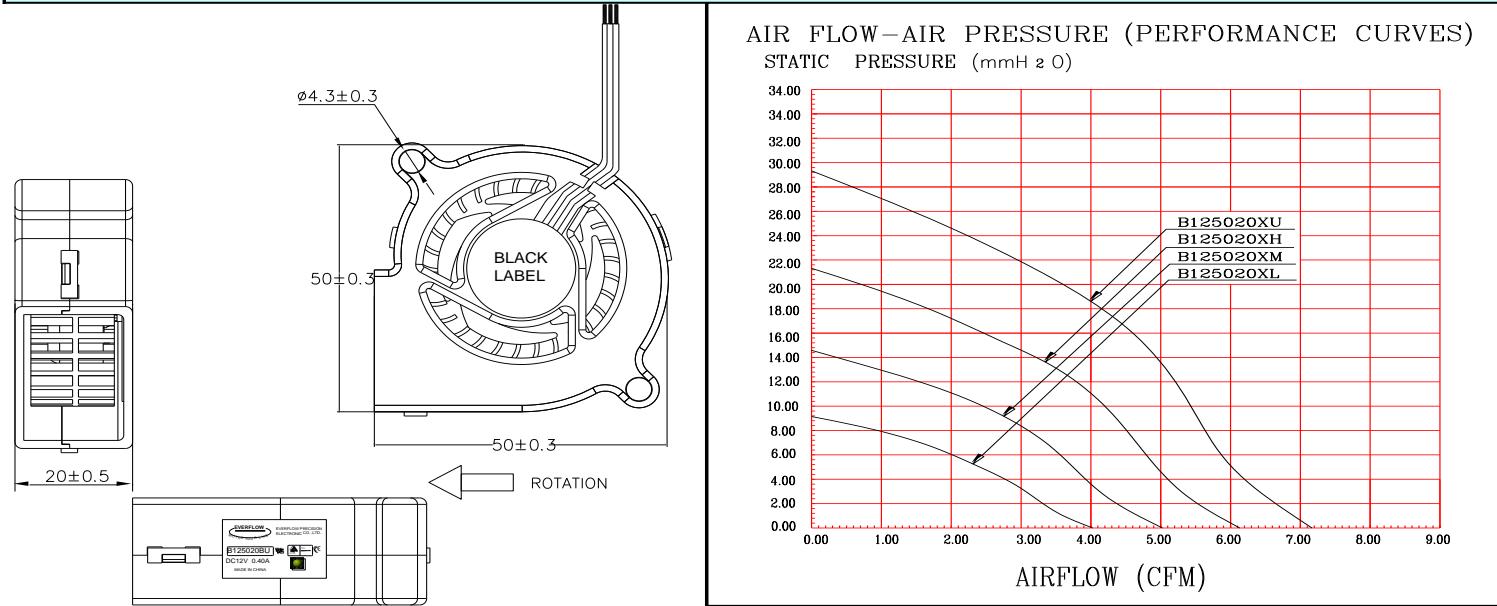

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
BB5020BL	12	7~13.2	0.12	1.44	3800	4.01	0.11	9.17	28
BB5020BM	12	7~13.2	0.20	2.40	4800	5.07	0.14	14.62	32
BB5020BH	12	7~13.2	0.30	3.60	5800	6.12	0.17	21.35	37
BB5020BU	12	7~13.2	0.40	4.80	6800	7.18	0.20	29.35	40
BB5020SL	12	7~13.2	0.12	1.44	3800	4.01	0.11	9.17	28
BB5020SM	12	7~13.2	0.20	2.40	4800	5.07	0.14	14.62	32
BB5020SH	12	7~13.2	0.30	3.60	5800	6.12	0.17	21.35	37
BB5020SU	12	7~13.2	0.40	4.80	6800	7.18	0.20	29.35	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

50×50×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 33g

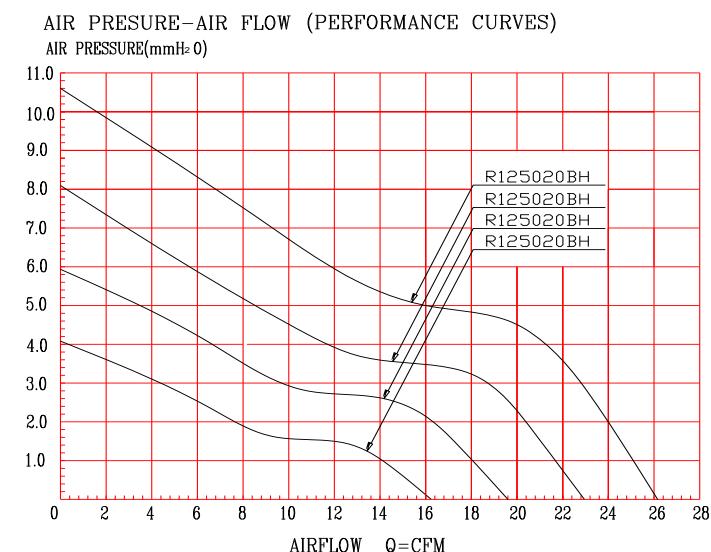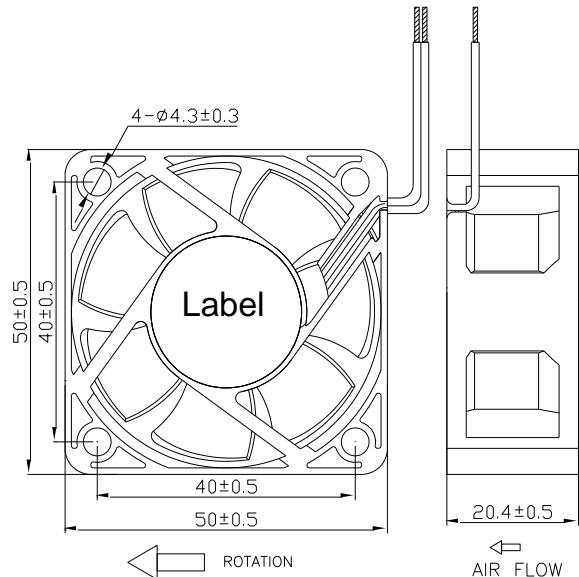

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R125020BL	12	7~13.2	0.20	2.4	5000	16.33	0.46	4.14	29
R125020BM	12	7~13.2	0.35	4.2	6000	19.60	0.56	5.96	33.2
R125020BH	12	7~13.2	0.55	6.6	7000	22.86	0.65	8.12	37.2
R125020BU	12	7~13.2	0.70	8.4	8000	26.13	0.74	10.60	42.8
R125020SL	12	7~13.2	0.20	2.4	5000	16.33	0.46	4.14	29
R125020SM	12	7~13.2	0.35	4.2	6000	19.60	0.56	5.96	33.2
R125020SH	12	7~13.2	0.55	6.6	7000	22.86	0.65	8.12	37.2
R125020SU	12	7~13.2	0.70	8.4	8000	26.13	0.74	10.60	42.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 14g

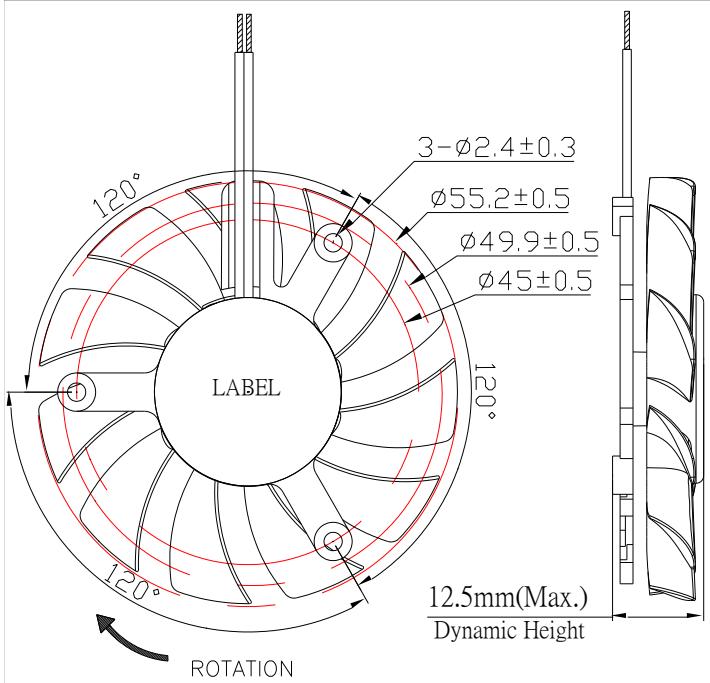

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

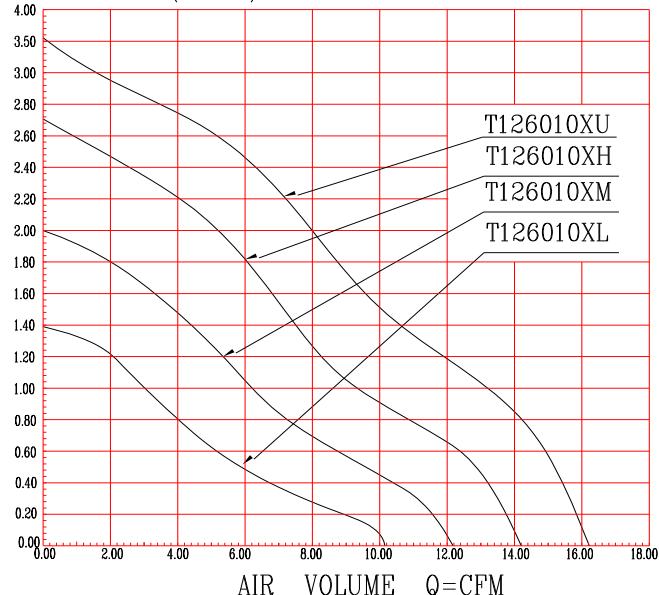

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static	Sound
								Pressure	level
						(CFM)	m ³ /min	(mmH ₂ O)	dB(A)
T126010BL	12	7~13.2	0.10	1.20	3000	10.14	0.29	1.39	26
T126010BM	12	7~13.2	0.14	1.68	3600	12.17	0.34	2.0	30
T126010BH	12	7~13.2	0.20	2.40	4200	14.20	0.40	2.72	35
T126010BU	12	7~13.2	0.25	3.00	4800	16.23	0.46	3.55	39
T126010SL	12	7~13.2	0.10	1.20	3000	10.14	0.29	1.39	26
T126010SM	12	7~13.2	0.14	1.68	3600	12.17	0.34	2.0	30
T126010SH	12	7~13.2	0.18	2.16	4200	14.20	0.40	2.72	35
T126010SU	12	7~13.2	0.25	3.00	4800	16.23	0.46	3.55	39

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 15g

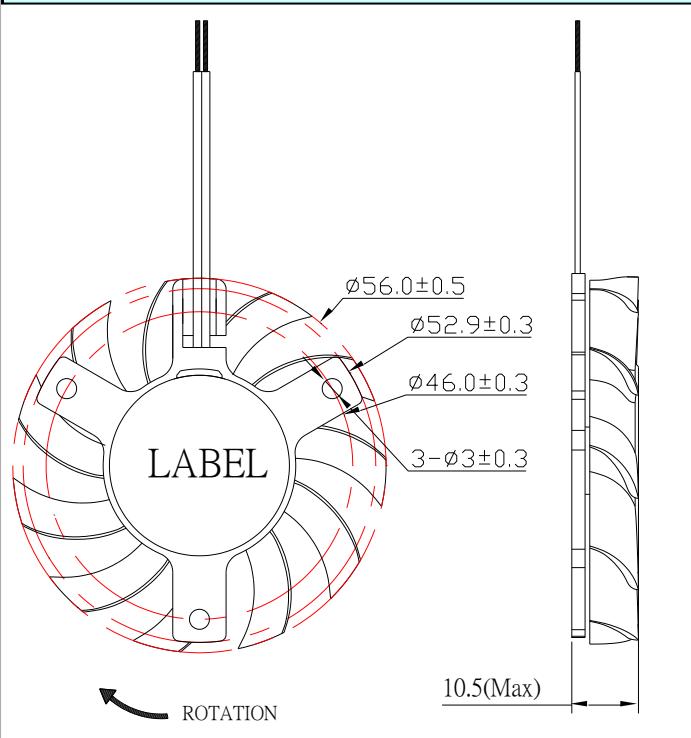

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

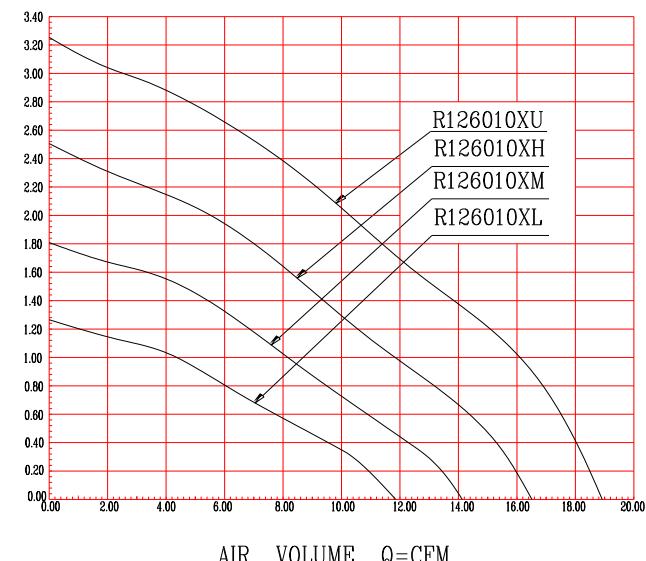

AIR VOLUME Q=CFM

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R126010BL	12	7~13.2	0.10	1.20	3000	11.82	0.33	1.28	22.9
R126010BM	12	7~13.2	0.14	1.68	3600	14.19	0.40	1.84	27.7
R126010BH	12	7~13.2	0.20	2.40	4200	16.56	0.47	2.50	31.2
R126010BU	12	7~13.2	0.25	3.00	4800	18.93	0.54	3.26	37
R126010SL	12	7~13.2	0.10	1.20	3000	11.82	0.33	1.28	22.9
R126010SM	12	7~13.2	0.14	1.68	3600	14.19	0.40	1.84	27.7
R126010SH	12	7~13.2	0.18	2.16	4200	16.56	0.47	2.50	31.2
R126010SU	12	7~13.2	0.25	3.00	4800	18.93	0.54	3.26	37

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

60×60×10MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 30g

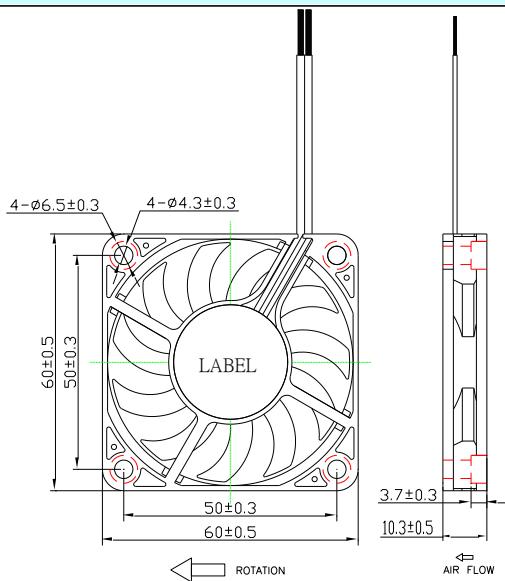

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

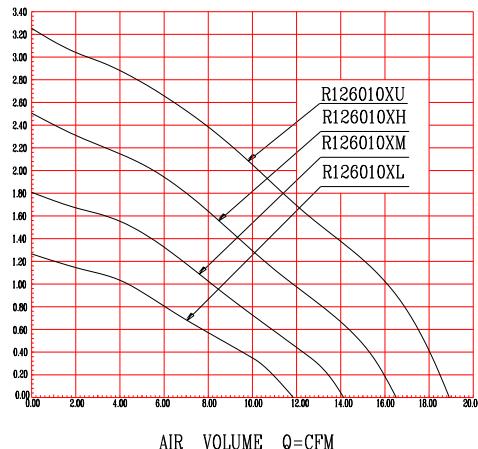

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R126010BL	12	7~13.2	0.10	1.20	3000	11.82	0.33	1.28	22.9
R126010BM	12	7~13.2	0.14	1.68	3600	14.19	0.40	1.84	27.7
R126010BH	12	7~13.2	0.20	2.40	4200	16.56	0.47	2.50	31.2
R126010BU	12	7~13.2	0.25	3.00	4800	18.93	0.54	3.26	37
R126010SL	12	7~13.2	0.10	1.20	3000	11.82	0.33	1.28	22.9
R126010SM	12	7~13.2	0.14	1.68	3600	14.19	0.40	1.84	27.7
R126010SH	12	7~13.2	0.18	2.16	4200	16.56	0.47	2.50	31.2
R126010SU	12	7~13.2	0.25	3.00	4800	18.93	0.54	3.26	37

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×15MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 40g

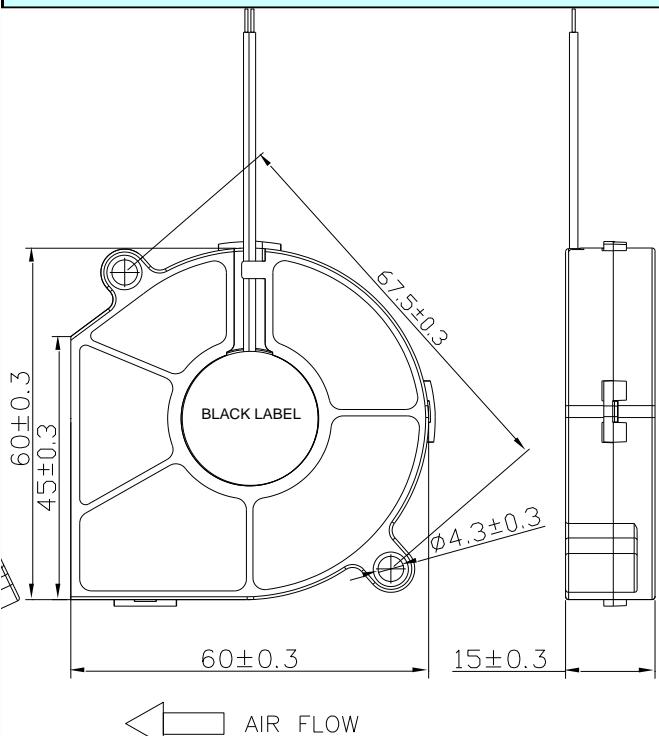

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

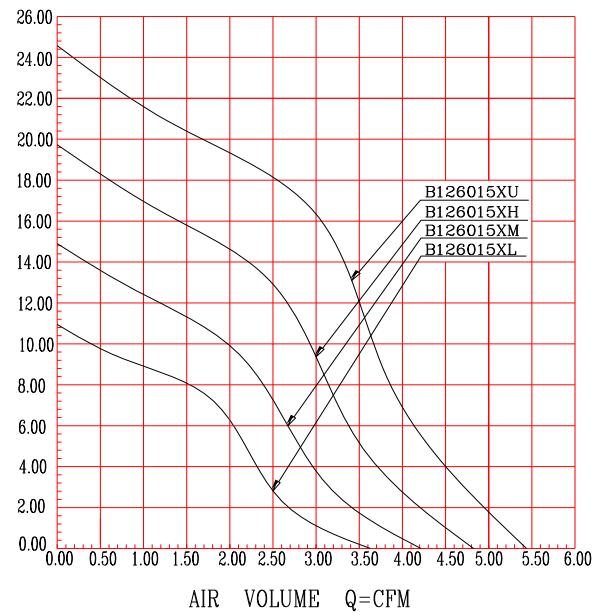

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B126015BL	12	7~13.2	0.14	1.68	3600	3.65	0.10	10.93	33.4
B126015BM	12	7~13.2	0.20	2.40	4200	4.26	0.12	14.88	38
B126015BH	12	7~13.2	0.30	3.60	4800	4.87	0.14	19.44	42.1
B126015BU	12	7~13.2	0.40	4.80	5400	5.48	0.16	24.60	45.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×15MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 40g

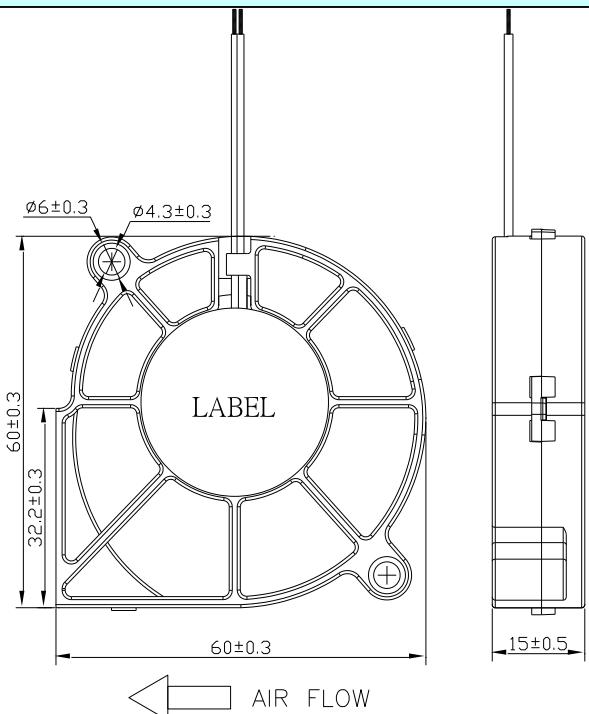

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

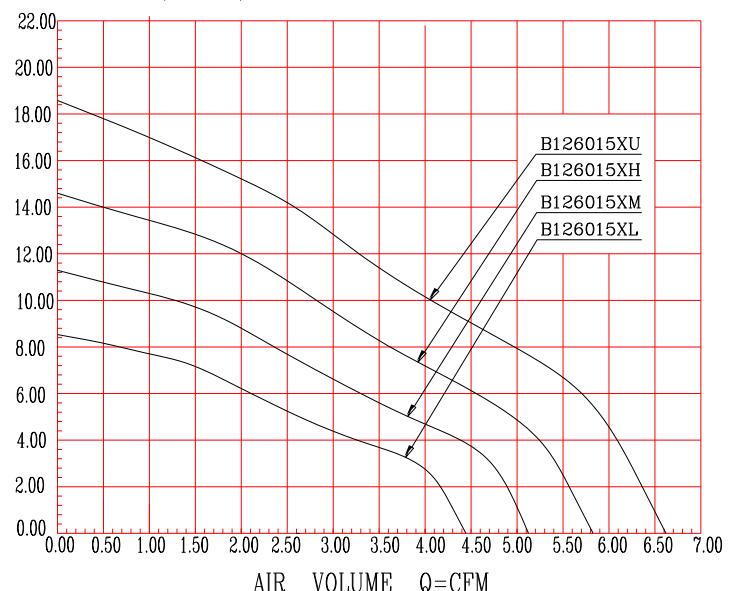

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B126015BL	12	7~13.2	0.14	1.68	3600	4.41	0.13	8.29	34.7
B126015BM	12	7~13.2	0.20	2.40	4200	5.15	0.15	11.28	37.8
B126015BH	12	7~13.2	0.30	3.60	4800	5.88	0.17	14.73	41.8
B126015BU	12	7~13.2	0.40	4.80	5400	6.61	0.19	18.64	44.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×15MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 40g

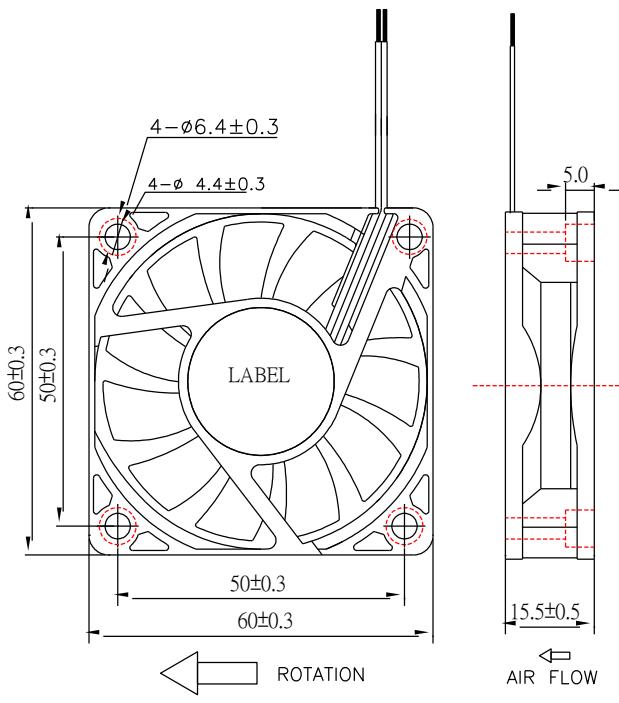

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

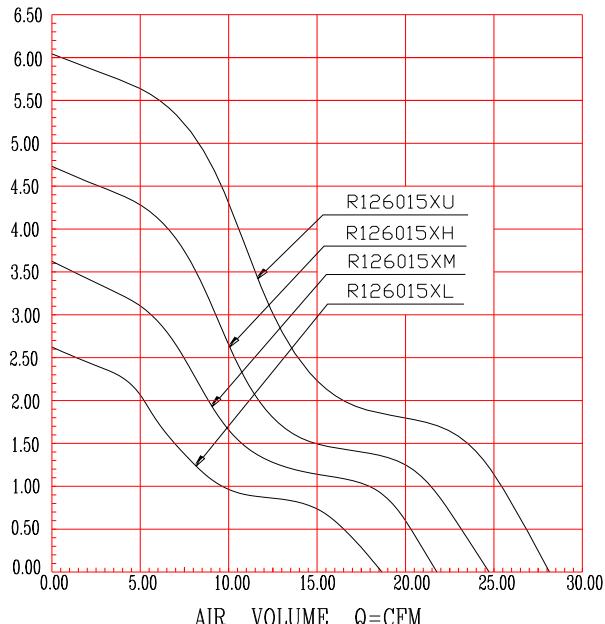

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R126015BL	12	7~13.2	0.14	1.68	3600	18.69	0.53	2.68	26.9
R126015BM	12	7~13.2	0.20	2.40	4200	21.81	0.62	3.65	30.8
R126015BH	12	7~13.2	0.30	3.60	4800	24.93	0.71	4.77	33.9
R126015BU	12	7~13.2	0.40	4.80	5400	28.05	0.79	6.04	37
R126015SL	12	7~13.2	0.14	1.68	3600	18.69	0.53	2.68	26.9
R126015SM	12	7~13.2	0.20	2.40	4200	21.81	0.62	3.65	30.8
R126015SH	12	7~13.2	0.30	3.60	4800	24.93	0.71	4.77	33.9
R126015SU	12	7~13.2	0.40	4.80	5400	28.05	0.79	6.04	37

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 57g

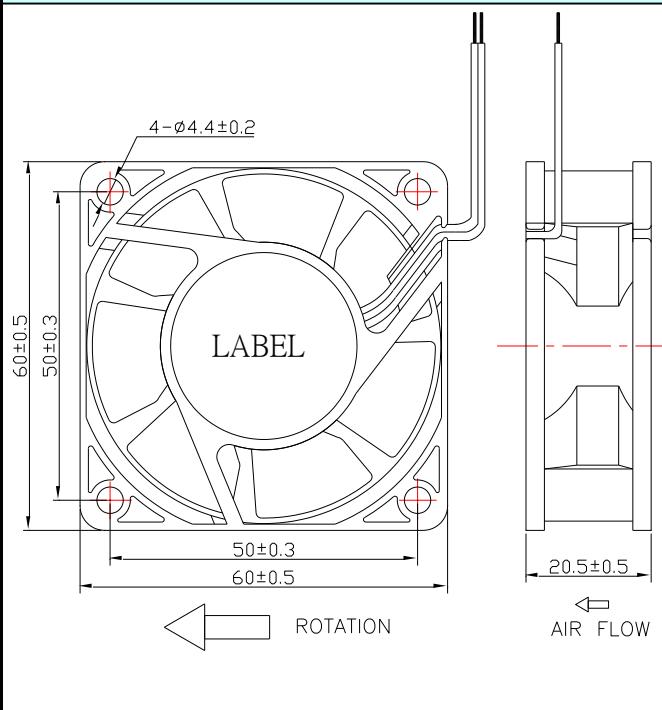

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

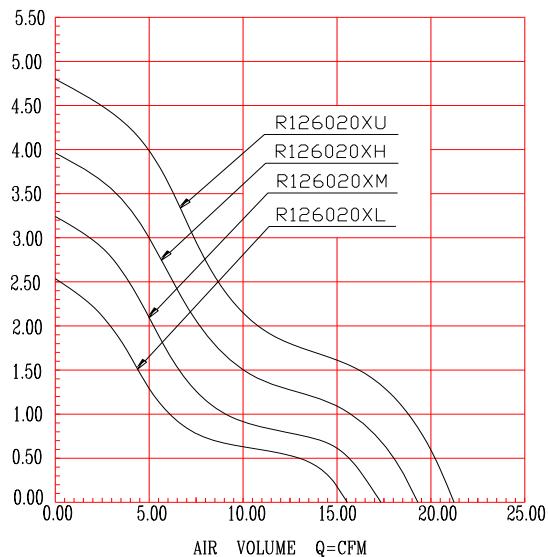

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R126020BL	12	7~13.2	0.09	1.08	3200	15.52	0.44	2.54	26.5
R126020BM	12	7~13.2	0.12	1.44	3600	17.46	0.49	3.22	28.1
R126020BH	12	7~13.2	0.15	1.80	4000	19.40	0.55	3.97	30
R126020BU	12	7~13.2	0.20	2.40	4400	21.34	0.60	4.80	32.5
R126020SL	12	7~13.2	0.09	1.08	3200	15.52	0.44	2.54	26.5
R126020SM	12	7~13.2	0.12	1.44	3600	17.46	0.49	3.22	28.1
R126020SH	12	7~13.2	0.15	1.80	4000	19.40	0.55	3.97	30
R126020SU	12	7~13.2	0.20	2.40	4400	21.34	0.60	4.80	32.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

EVERFLOW

60×60×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 50g

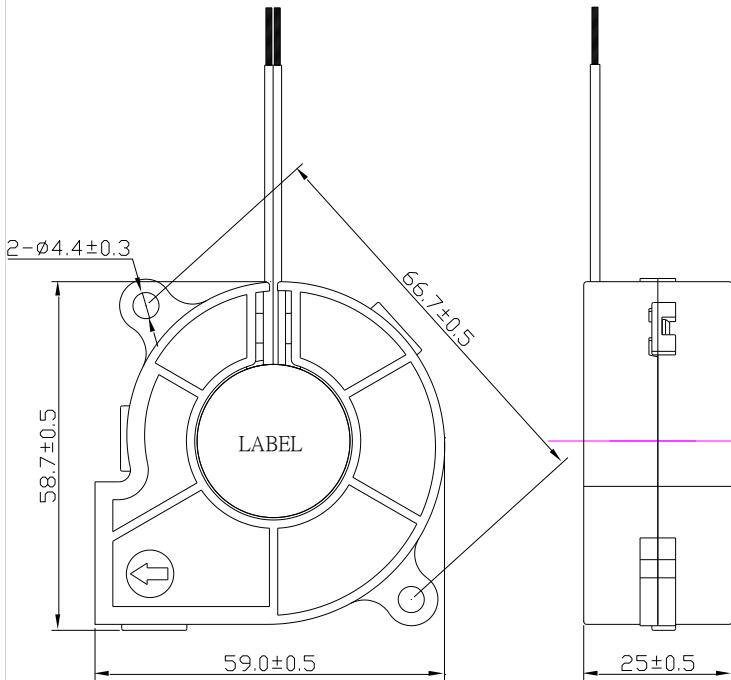

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE (mmH₂O)

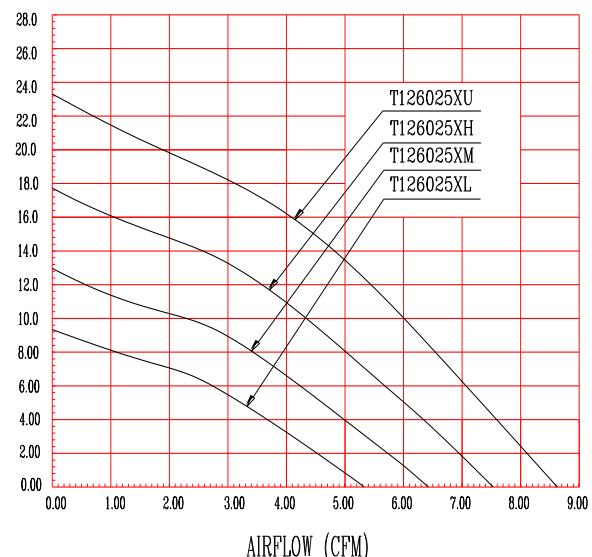

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T126025 BL	12	7~13.2	0.12	1.44	3000	5.40	0.15	9.10	28.7
T126025 BM	12	7~13.2	0.16	1.92	3600	6.48	0.18	13.11	33.7
T126025 BH	12	7~13.2	0.22	2.64	4200	7.56	0.21	17.84	36.6
T126025 BU	12	7~13.2	0.26	3.12	4800	8.64	0.24	23.30	38.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U

24v L.M.H.U 48v U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C


Weight : 63g

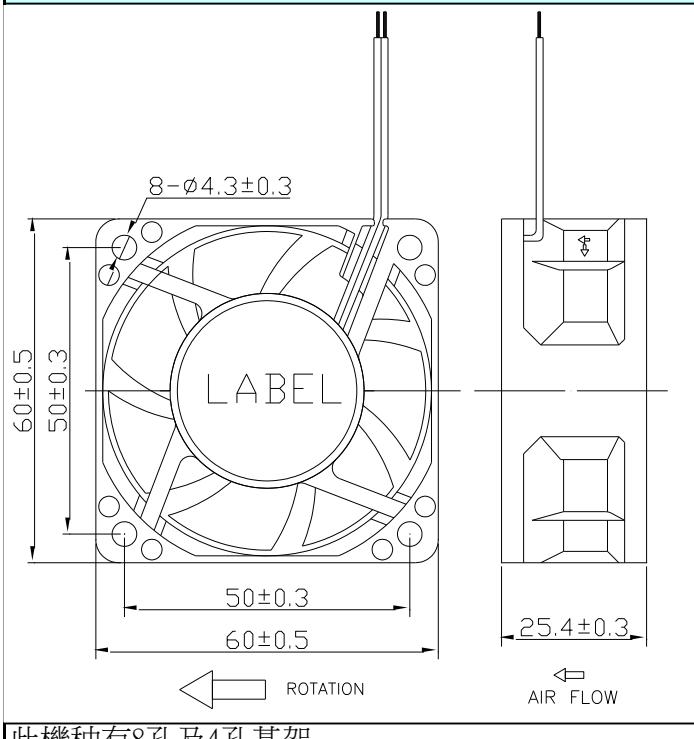

此機種有8孔及4孔基架。

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

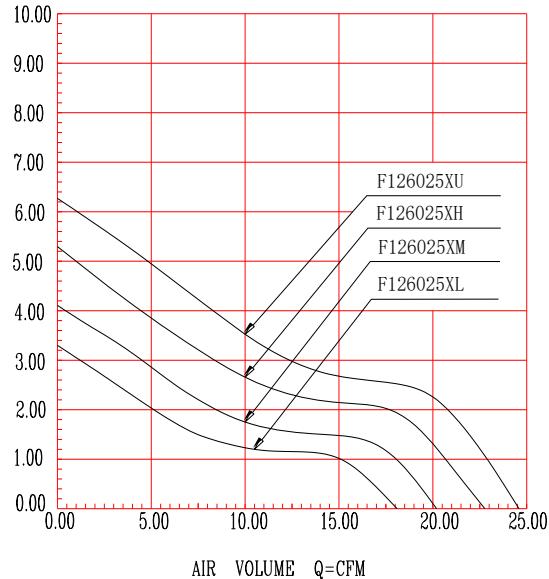

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F126025BL	12	7~13.2	0.12	1.44	3600	18.06	0.51	3.35	23.4
F126025BM	12	7~13.2	0.16	1.92	4000	20.07	0.57	4.14	26.9
F126025BH	12	7~13.2	0.22	2.64	4550	22.83	0.65	5.36	30.5
F126025BU	12	7~13.2	0.26	3.12	4900	24.59	0.70	6.22	33.5
F126025SL	12	7~13.2	0.12	1.44	3600	18.06	0.51	3.35	23.4
F126025SM	12	7~13.2	0.16	1.92	4000	20.07	0.57	4.14	26.9
F126025SH	12	7~13.2	0.22	2.64	4550	22.83	0.65	5.36	30.5
F126025SU	12	7~13.2	0.26	3.12	4900	24.59	0.70	6.22	33.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

60×60×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 50g

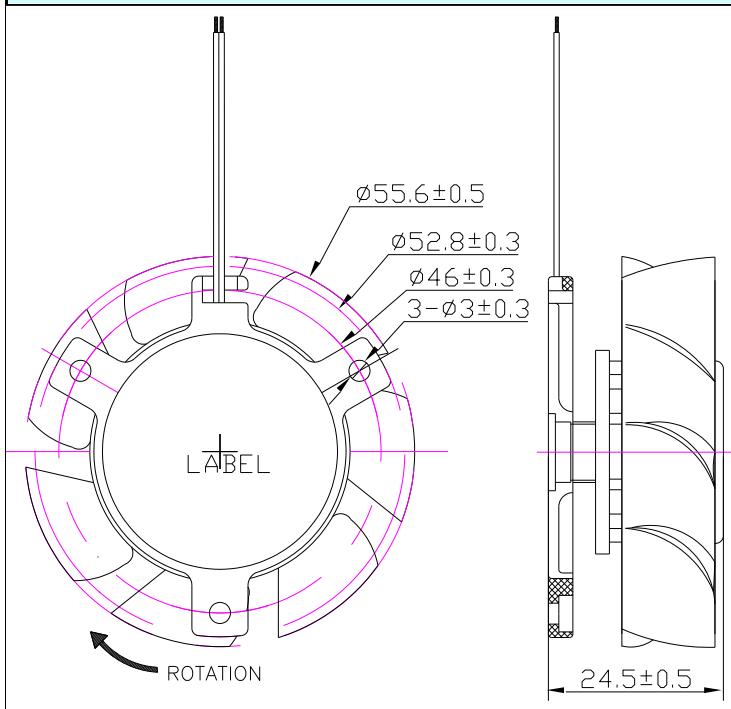

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

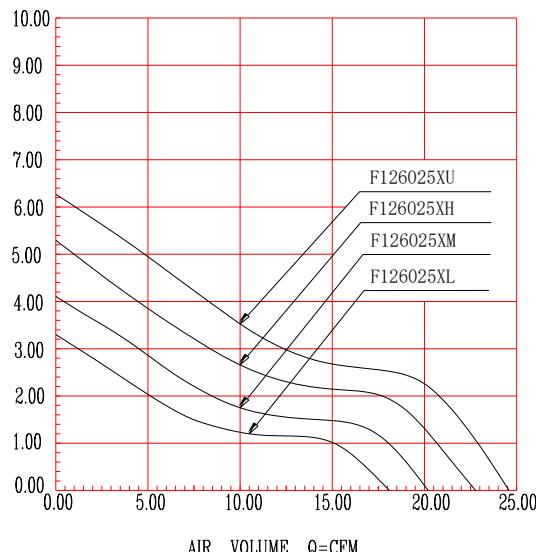

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F126025BL	12	7~13.2	0.12	1.44	3600	18.06	0.51	3.35	23.4
F126025BM	12	7~13.2	0.16	1.92	4000	20.07	0.57	4.14	26.9
F126025BH	12	7~13.2	0.22	2.64	4550	22.83	0.65	5.36	30.5
F126025BU	12	7~13.2	0.26	3.12	4900	24.59	0.70	6.22	33.5
F126025SL	12	7~13.2	0.12	1.44	3600	18.06	0.51	3.35	23.4
F126025SM	12	7~13.2	0.16	1.92	4000	20.07	0.57	4.14	26.9
F126025SH	12	7~13.2	0.22	2.64	4550	22.83	0.65	5.36	30.5
F126025SU	12	7~13.2	0.26	3.12	4900	24.59	0.70	6.22	33.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing

One Ball One Sleeve Bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 20g

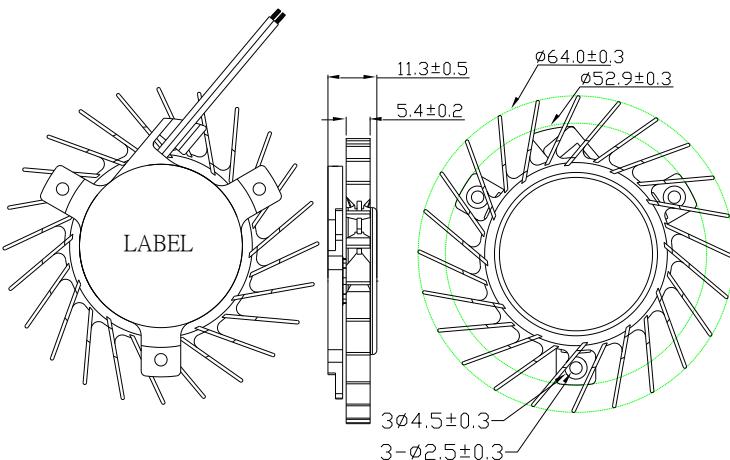

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE (mmH₂O)

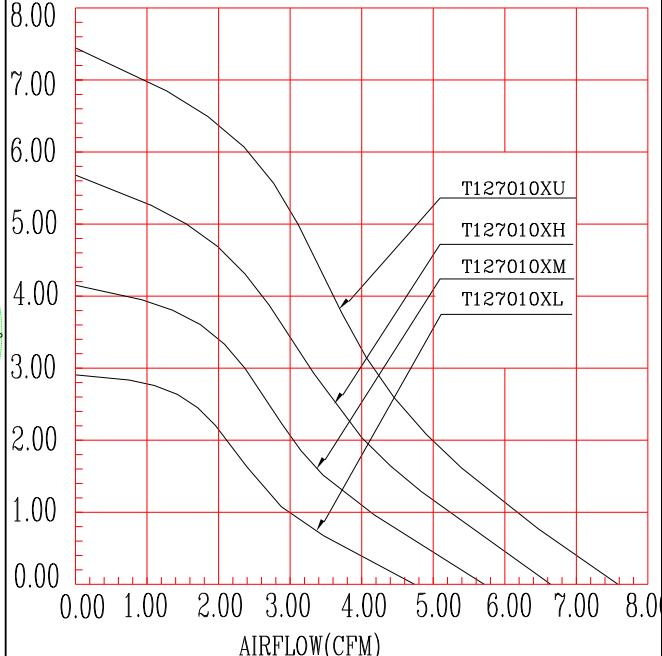

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010BL	12	7~13.2	0.18	2.16	3000	4.74	0.13	2.90	26.7
T127010BM	12	7~13.2	0.25	3.00	3600	5.68	0.16	4.17	31
T127010BH	12	7~13.2	0.35	4.20	4200	6.63	0.19	5.68	40.6
T127010BU	12	7~13.2	0.45	5.40	4800	7.58	0.21	7.42	44.1
T127010DL	12	7~13.2	0.18	2.16	3000	4.74	0.13	2.90	26.7
T127010DM	12	7~13.2	0.25	3.00	3600	5.68	0.16	4.17	31
T127010DH	12	7~13.2	0.35	4.20	4200	6.63	0.19	5.68	40.6
T127010DU	12	7~13.2	0.45	5.40	4800	7.58	0.21	7.42	44.1

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 14g

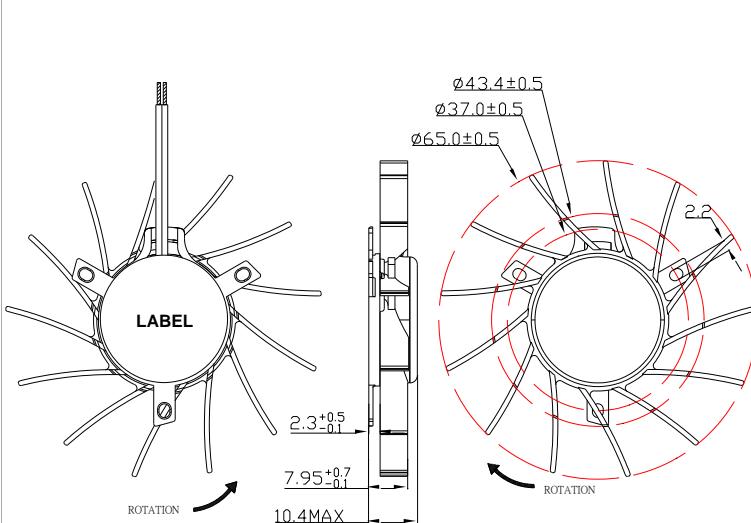

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE (mmH₂O)

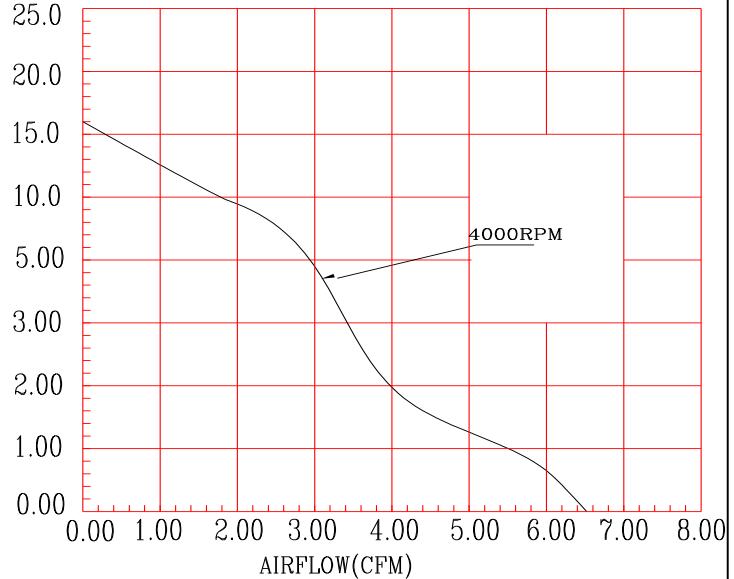

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010*U (IN MODUL)	12	7~13.2	0.45	5.40	3200	6.50	0.18	16	32

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

70x70x10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 17g

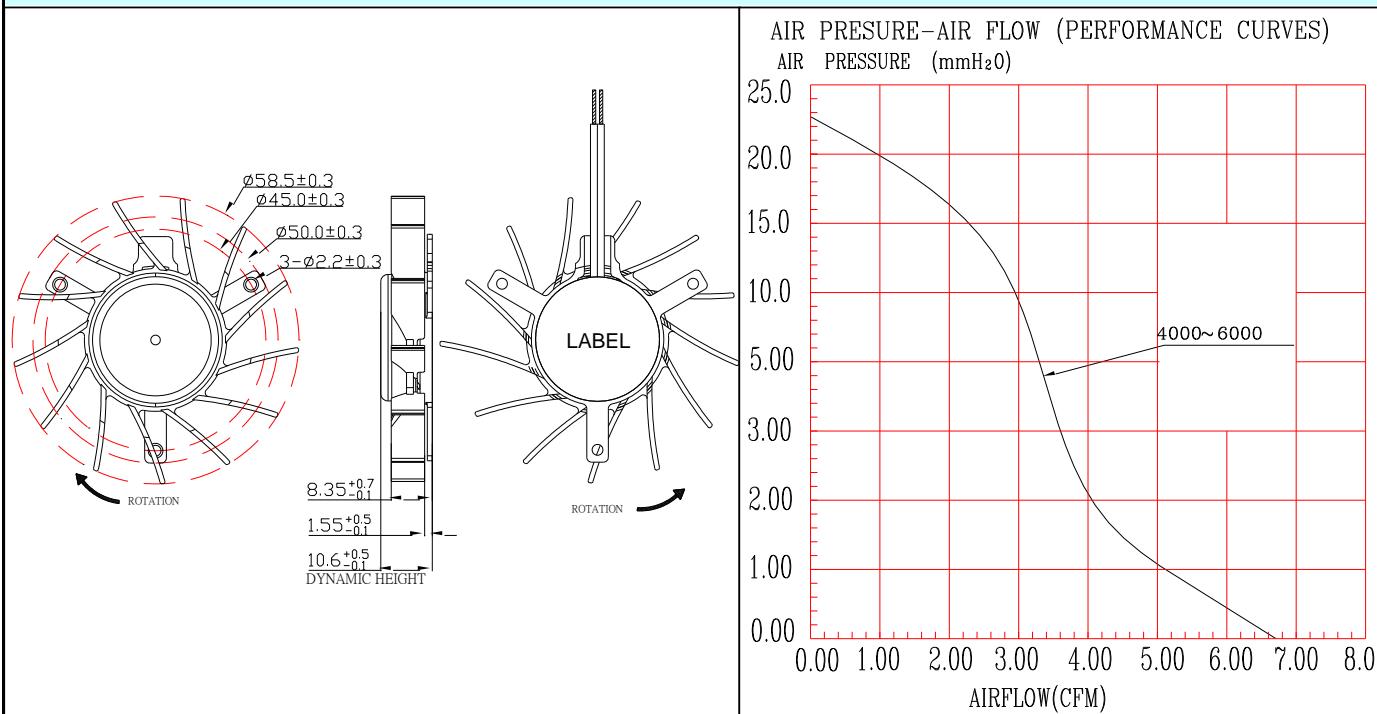

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010*U (IN MODUL)	12	7~13.2	0.45	5.40	4000~4600	5.69	0.16	22.7	32

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 20g

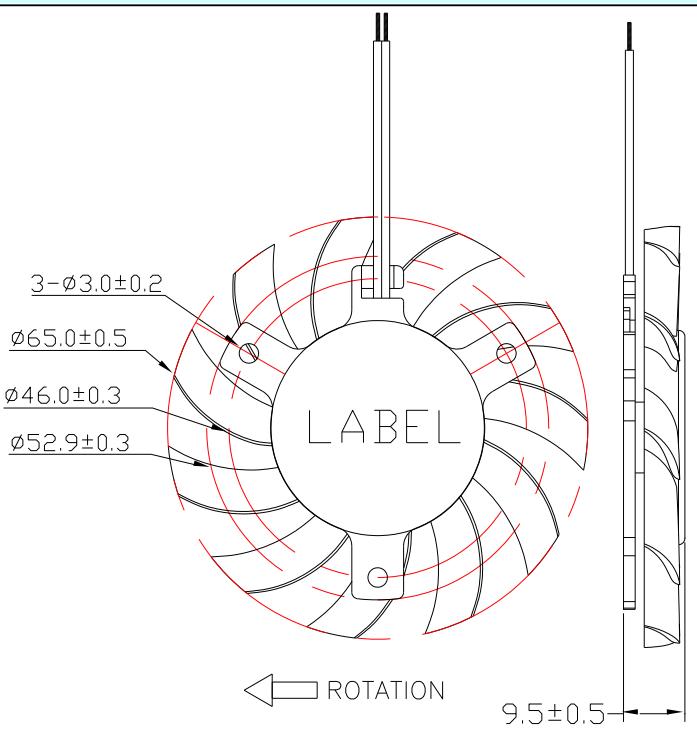

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

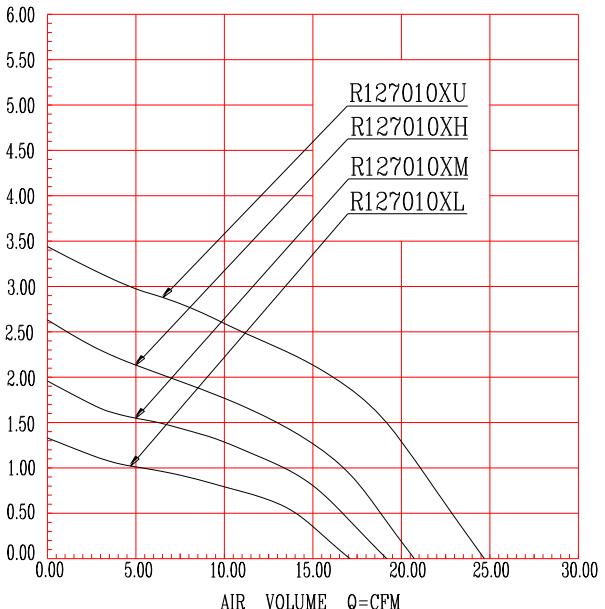

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010BL	12	7~13.2	0.18	2.16	3000	15.42	0.44	1.34	27.3
T127010BM	12	7~13.2	0.25	3.00	3600	18.51	0.52	1.93	31.1
T127010BH	12	7~13.2	0.35	4.20	4200	21.60	0.61	2.63	36.7
T127010BU	12	7~13.2	0.45	5.40	4800	24.69	0.70	3.43	40.3
T127010SL	12	7~13.2	0.18	2.16	3000	15.42	0.44	1.34	27.3
T127010SM	12	7~13.2	0.25	3.00	3600	18.51	0.52	1.93	31.1
T127010SH	12	7~13.2	0.35	4.20	4200	21.60	0.61	2.63	36.7
T127010SU	12	7~13.2	0.45	5.40	4800	24.69	0.70	3.43	40.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.




EVERFLOW

70×70×10MM SERIES


Bearing Type: Two ball bearing
EBR

Rated Voltage: 12v L.M.H.U

Material : Housing Plastic (UL : 94V-0)
Impeller Plastlc (UL : 94V-0)
Protection : Auto-Restart /Impedance
Operating Temp : ~10~70°C
Weight : 17g

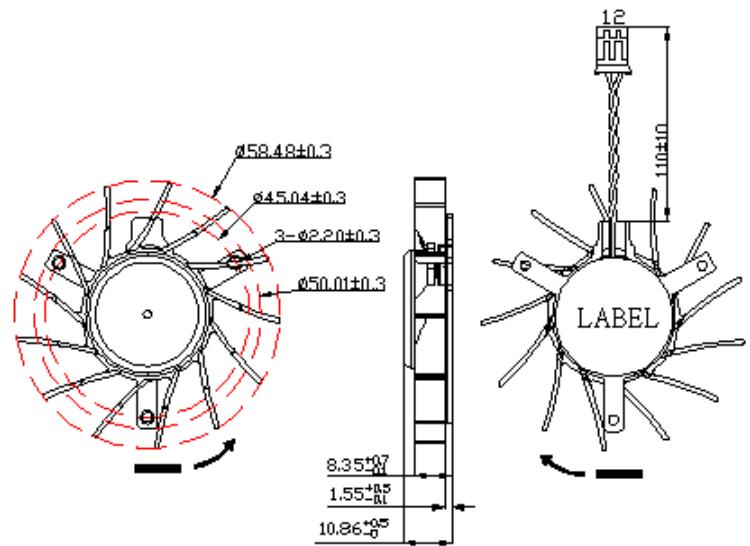

AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE (mmH₂O)

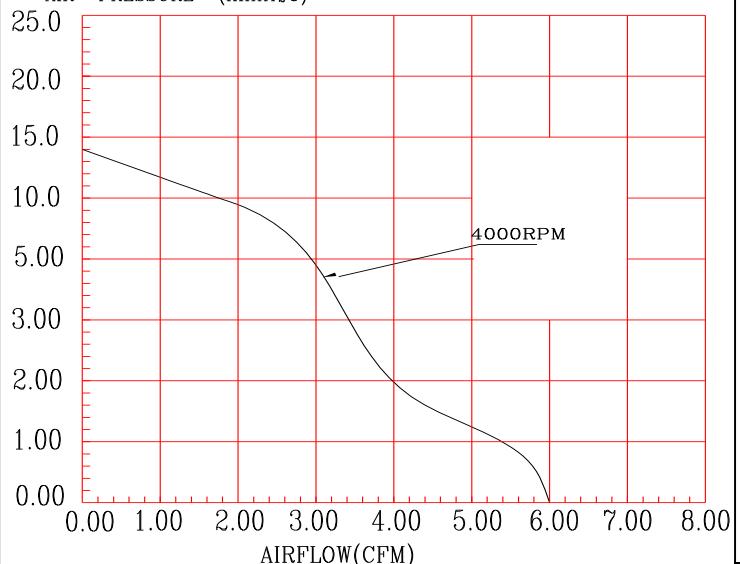

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127010SU (IN MODUL)	12	7~13.2	0.45	5.40	4000	6.00	0.17	14	32.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

70×70×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 35g

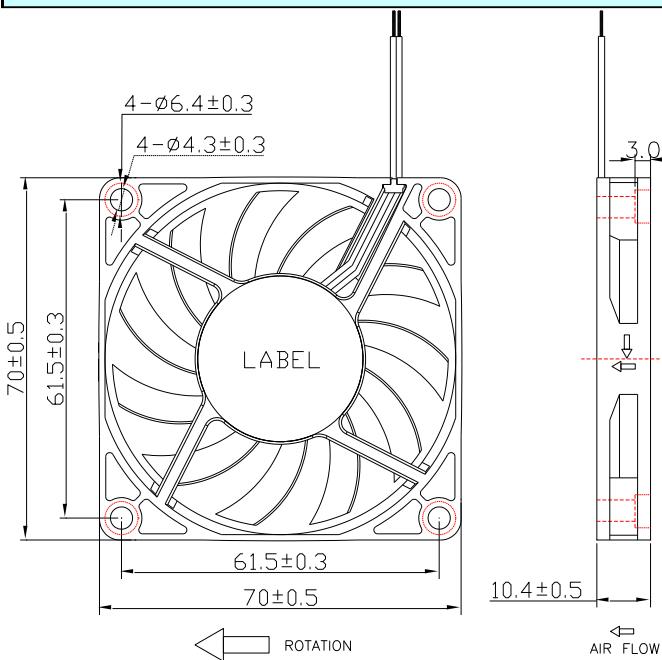

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

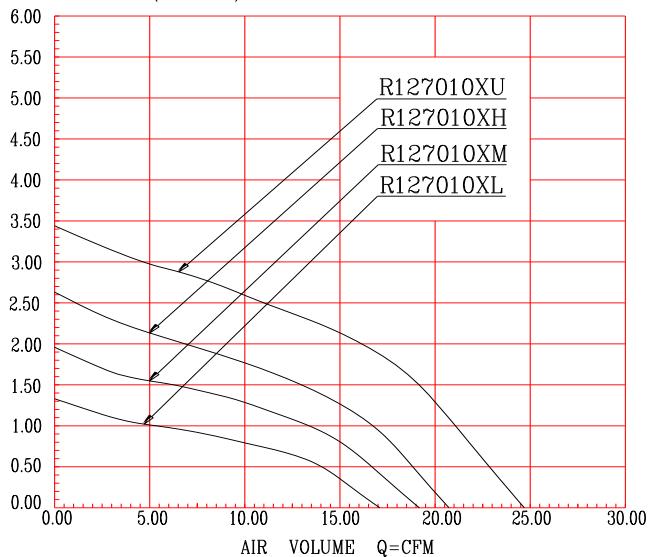

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127010BL	12	7~13.2	0.18	2.16	3000	15.42	0.44	1.34	27.3
R127010BM	12	7~13.2	0.25	3.00	3600	18.51	0.52	1.93	31.1
R127010BH	12	7~13.2	0.35	4.20	4200	21.60	0.61	2.63	36.7
R127010BU	12	7~13.2	0.45	5.40	4800	24.69	0.70	3.43	40.3
R127010SL	12	7~13.2	0.18	2.16	3000	15.42	0.44	1.34	27.3
R127010SM	12	7~13.2	0.25	3.00	3600	18.51	0.52	1.93	31.1
R127010SH	12	7~13.2	0.35	4.20	4200	21.60	0.61	2.63	36.7
R127010SU	12	7~13.2	0.45	5.40	4800	24.69	0.70	3.43	40.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

T7015MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 32g

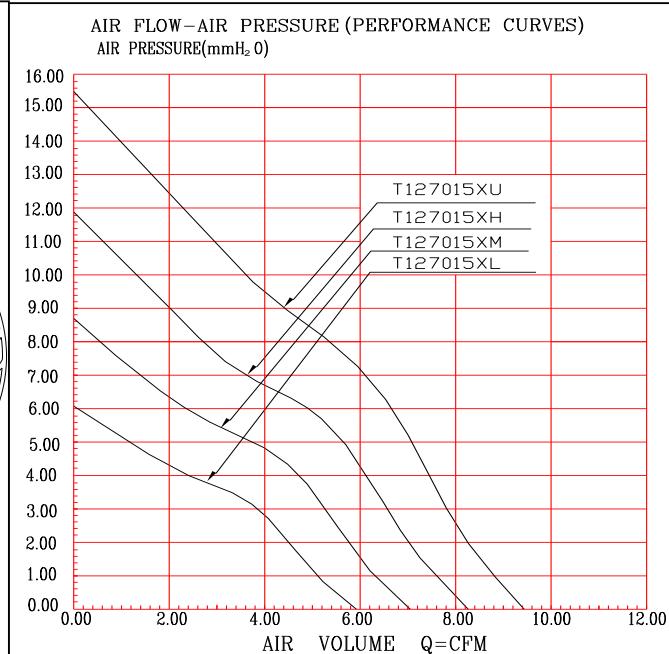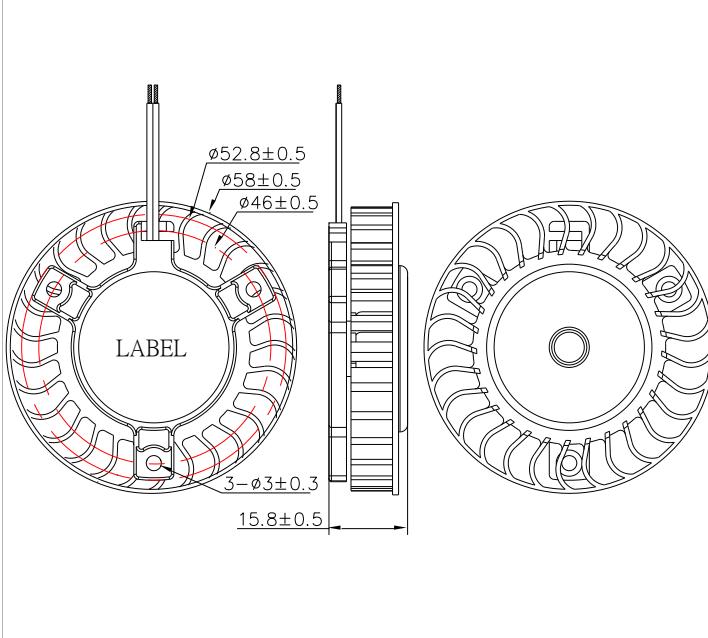

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Maximum Air Flow		Maximum Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127015BL	12	7~13.2	0.12	1.44	3000	5.93	0.17	6.08	37.5
T127015BM	12	7~13.2	0.15	1.80	3600	7.12	0.20	8.75	43.0
T127015BH	12	7~13.2	0.25	3.00	4200	8.30	0.24	11.91	45.0
T127015BU	12	7~13.2	0.30	3.60	4800	9.49	0.27	15.55	48.5
T127015SL	12	7~13.2	0.12	1.44	3000	5.93	0.17	6.08	37.5
T127015SM	12	7~13.2	0.15	1.80	3600	7.12	0.20	8.75	43.0
T127015SH	12	7~13.2	0.25	3.00	4200	8.30	0.24	11.91	45.0
T127015SU	12	7~13.2	0.30	3.60	4800	9.49	0.27	15.55	48.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (SIXTH)

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 32g

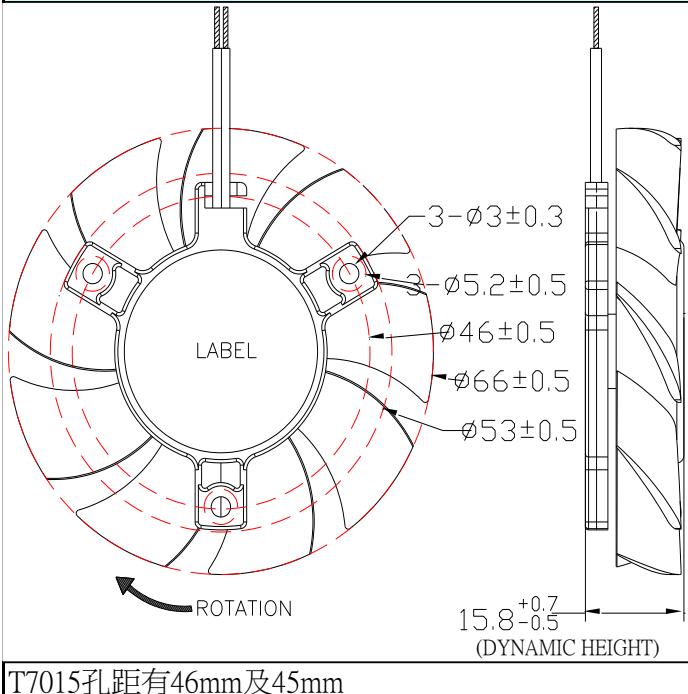

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

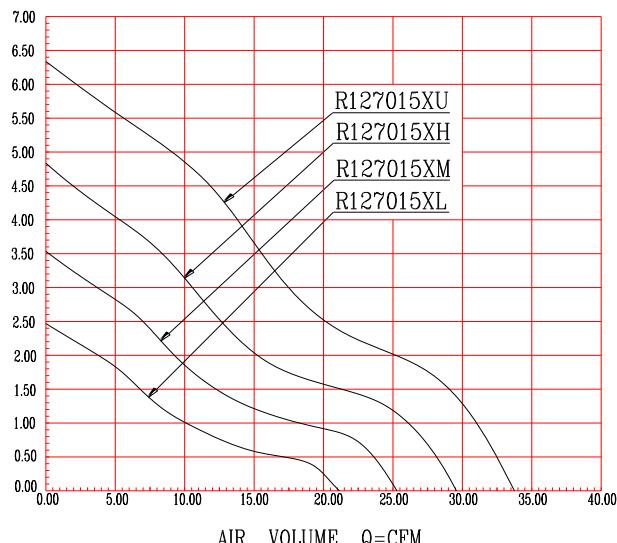

T7015孔距有46mm及45mm

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127015BL	12	7~13.2	0.12	1.44	3000	21.13	0.60	2.49	29.1
T127015BM	12	7~13.2	0.15	1.80	3600	25.36	0.72	3.59	32.8
T127015BH	12	7~13.2	0.25	3.00	4200	29.59	0.84	4.88	37
T127015BU	12	7~13.2	0.30	3.60	4800	33.82	0.96	6.38	42.4
T127015SL	12	7~13.2	0.12	1.44	3000	21.13	0.60	2.49	29.1
T127015SM	12	7~13.2	0.15	1.80	3600	25.36	0.72	3.59	32.8
T127015SH	12	7~13.2	0.25	3.00	4200	29.59	0.84	4.88	37
T127015SU	12	7~13.2	0.30	3.60	4800	33.82	0.96	6.38	42.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW



70×70×15MM SERIES (seventh)

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V

Material : Housing Plastic (UL : 94V-0)
Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance
Operating Temp : ~10~70°C
Weight : 34g

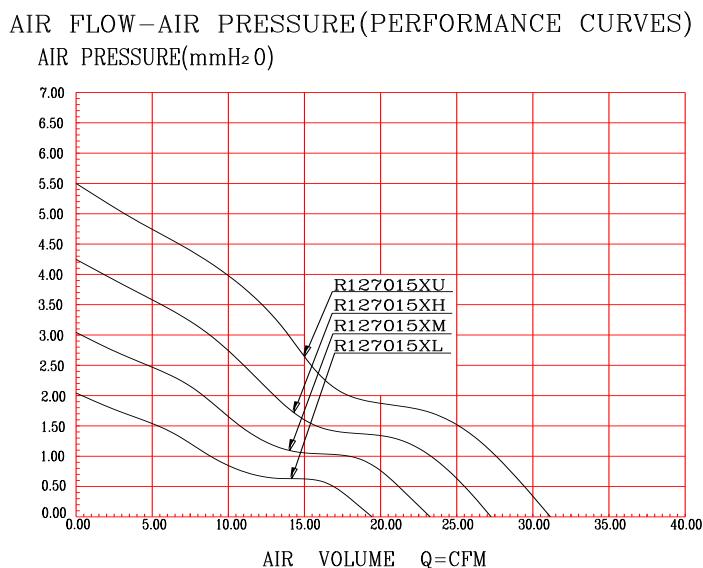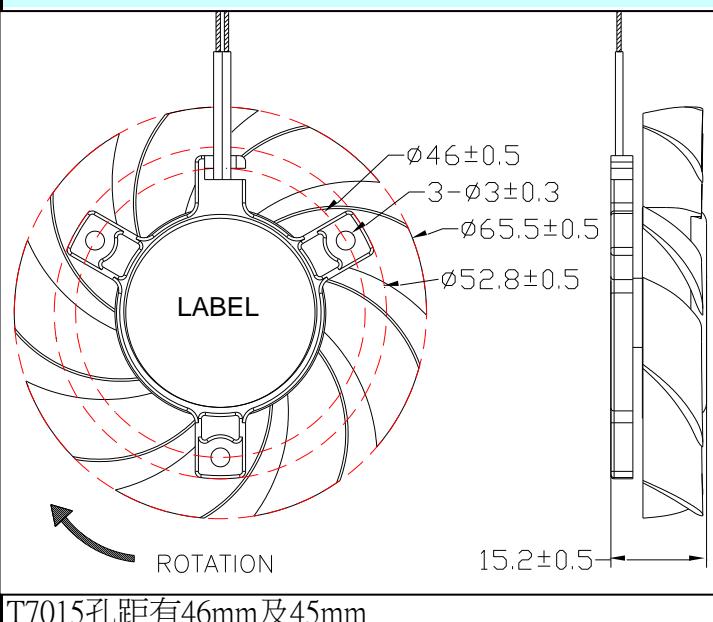

T7015孔距有46mm及45mm

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T127015BL	12	7~13.2	0.12	1.44	3000	19.46	0.55	2.15	27
T127015BM	12	7~13.2	0.15	1.80	3600	23.35	0.66	3.09	31.6
T127015BH	12	7~13.2	0.25	3.00	4200	27.24	0.77	4.21	36.5
T127015BU	12	7~13.2	0.30	3.60	4800	31.13	0.88	5.50	41
T127015SL	12	7~13.2	0.12	1.44	3000	19.46	0.55	2.15	27
T127015SM	12	7~13.2	0.15	1.80	3600	23.35	0.66	3.09	31.6
T127015SH	12	7~13.2	0.25	3.00	4200	27.24	0.77	4.21	36.5
T127015SU	12	7~13.2	0.30	3.60	4800	31.13	0.88	5.50	41

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (fifth)

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 42g

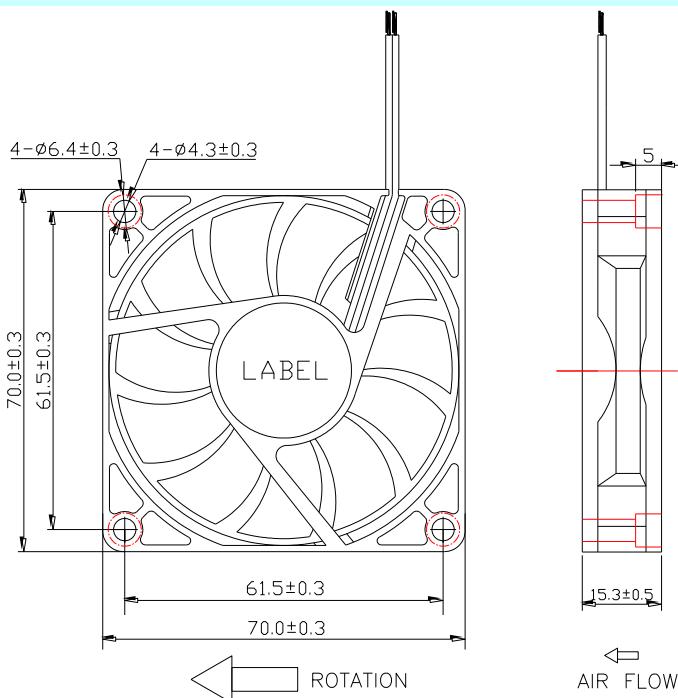

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

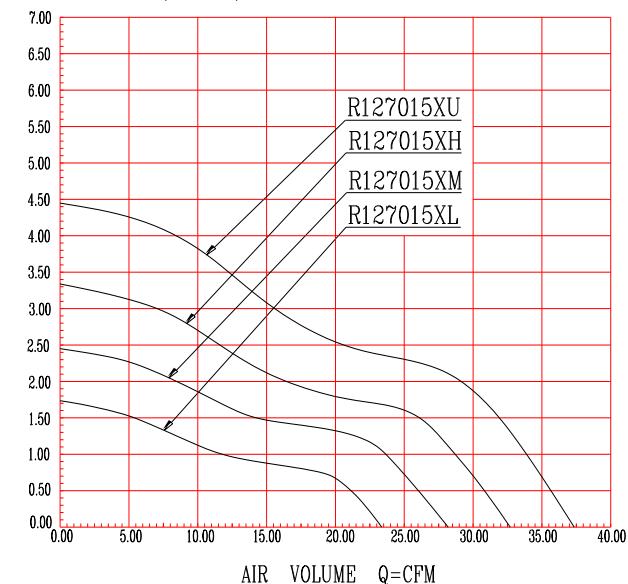

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127015BL	12	7~13.2	0.25	3.00	3000	23.41	0.66	1.72	28.2
R127015BM	12	7~13.2	0.28	3.36	3600	28.10	0.80	2.48	31.9
R127015BH	12	7~13.2	0.30	3.60	4200	32.78	0.93	3.38	36
R127015BU	12	7~13.2	0.35	4.20	4800	37.46	1.06	4.41	38.9
R127015SL	12	7~13.2	0.25	3.00	3000	23.41	0.66	1.72	28.2
R127015SM	12	7~13.2	0.28	3.36	3600	28.10	0.80	2.48	31.9
R127015SH	12	7~13.2	0.30	3.60	4200	32.78	0.93	3.38	36
R127015SU	12	7~13.2	0.35	4.20	4800	37.46	1.06	4.41	38.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

70×70×15MM SERIES (SIXTH)

Bearing Type: Two ball bearing
EBR



Rated Voltage 12V/24V

Material : Housing Plastic (UL : 94V-0)
Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 42g

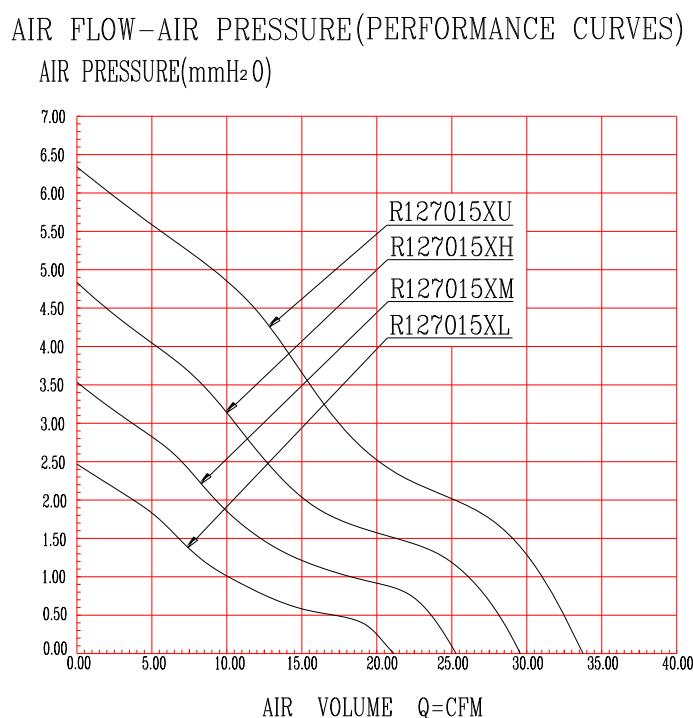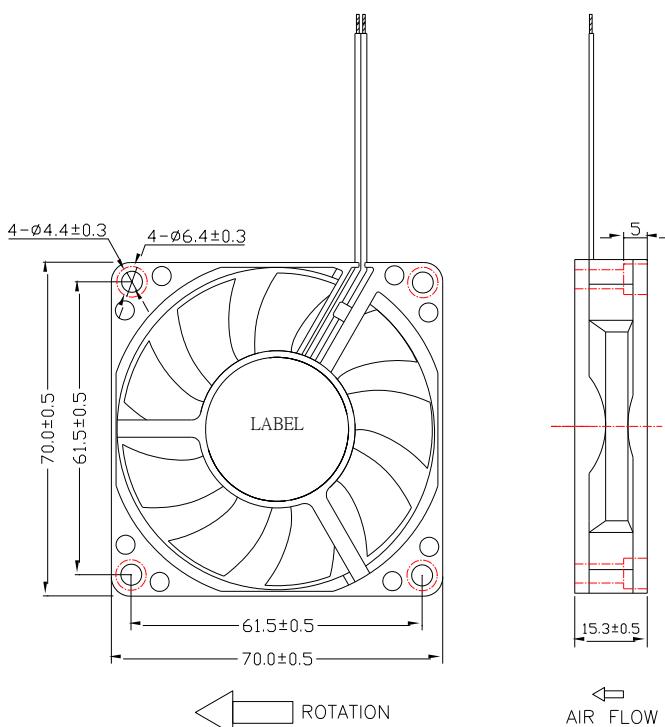

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127015BL	12	7~13.2	0.12	1.44	3000	21.13	0.60	2.49	29.1
R127015BM	12	7~13.2	0.15	1.80	3600	25.36	0.72	3.59	32.8
R127015BH	12	7~13.2	0.25	3.00	4200	29.59	0.84	4.88	37
R127015BU	12	7~13.2	0.30	3.60	4800	33.82	0.96	6.38	42.4
R127015SL	12	7~13.2	0.12	1.44	3000	21.13	0.60	2.49	29.1
R127015SM	12	7~13.2	0.15	1.80	3600	25.36	0.72	3.59	32.8
R127015SH	12	7~13.2	0.25	3.00	4200	29.59	0.84	4.88	37
R127015SU	12	7~13.2	0.30	3.60	4800	33.82	0.96	6.38	42.4

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES (seventh)

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 42g

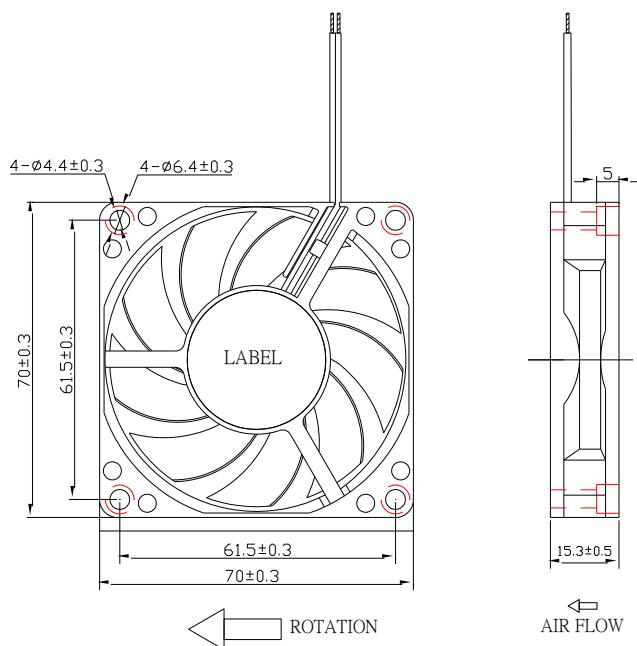

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

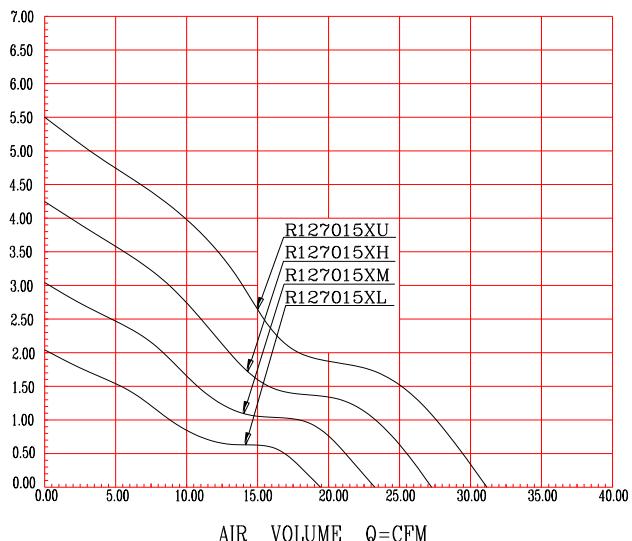

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127015BL	12	7~13.2	0.12	1.44	3000	19.46	0.55	2.15	27
R127015BM	12	7~13.2	0.15	1.80	3600	23.35	0.66	3.09	31.6
R127015BH	12	7~13.2	0.25	3.00	4200	27.24	0.77	4.21	36.5
R127015BU	12	7~13.2	0.30	3.60	4800	31.13	0.88	5.50	41
R127015SL	12	7~13.2	0.12	1.44	3000	19.46	0.55	2.15	27
R127015SM	12	7~13.2	0.15	1.80	3600	23.35	0.66	3.09	31.6
R127015SH	12	7~13.2	0.25	3.00	4200	27.24	0.77	4.21	36.5
R127015SU	12	7~13.2	0.30	3.60	4800	31.13	0.88	5.50	41

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×15MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 42g

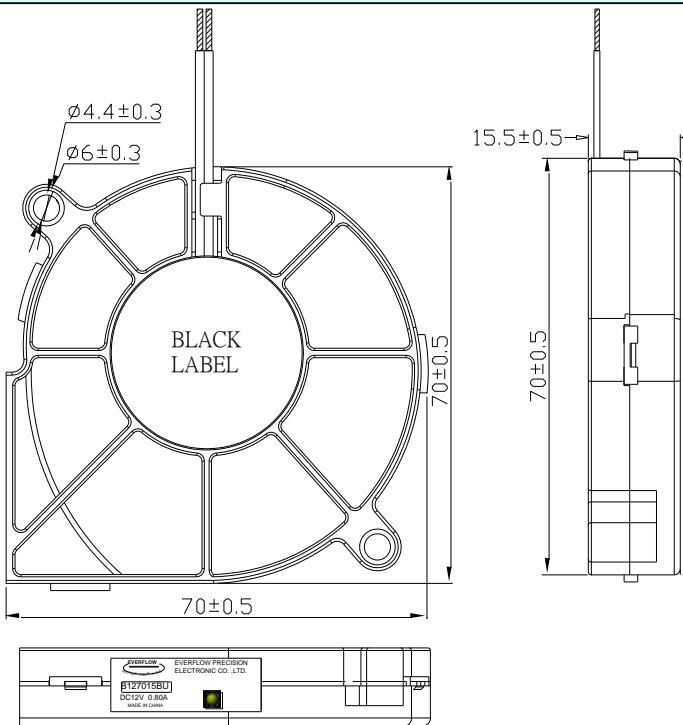

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

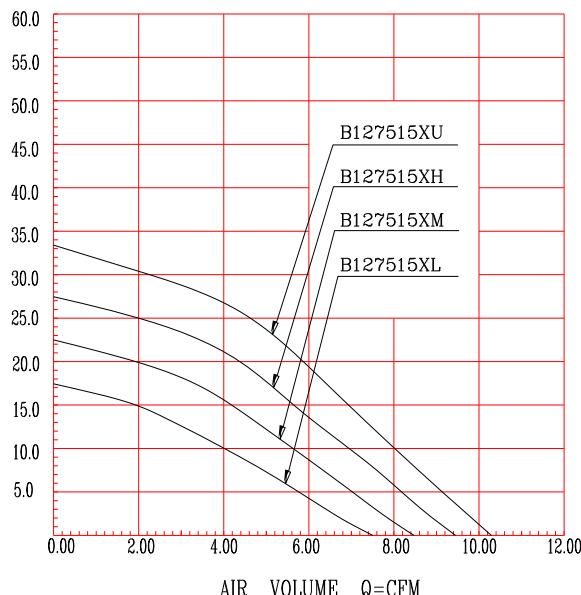

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127015BL	12	7~13.2	0.35	4.20	3600	6.91	0.20	13.78	43.0
B127015BM	12	7~13.2	0.45	5.40	4200	8.07	0.23	18.75	45.2
B127015BH	12	7~13.2	0.60	7.20	4800	9.22	0.26	24.49	48.6
B127015BU	12	7~13.2	0.80	9.60	5400	10.37	0.29	31.00	52.30

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

70x70x20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 58g

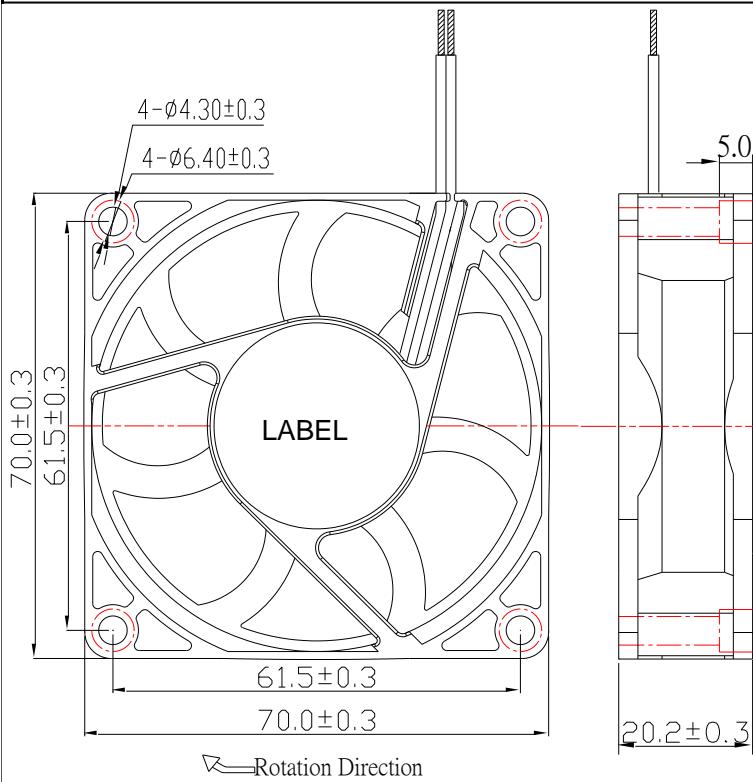

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

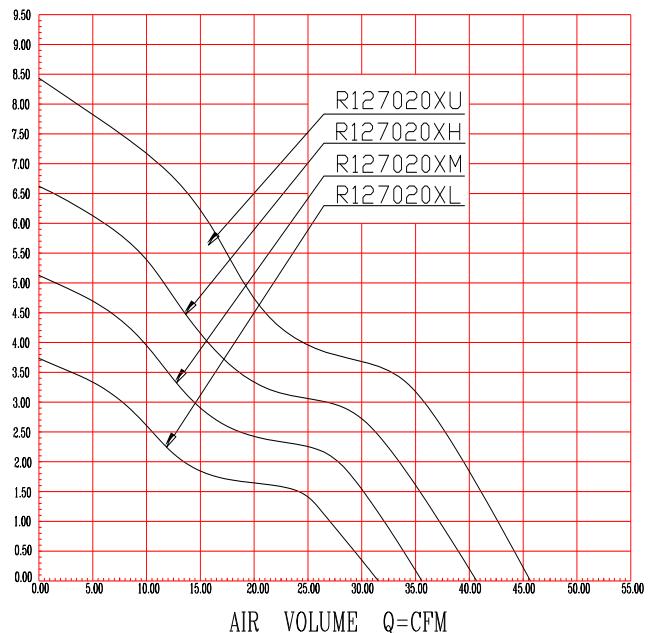

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127020BL	12	7~13.2	0.20	2.40	3600	30.51	0.86	3.76	33.3
R127020BM	12	7~13.2	0.26	3.12	4200	35.59	1.01	5.12	37
R127020BH	12	7~13.2	0.30	3.60	4800	40.67	1.15	6.69	40.7
R127020BU	12	7~13.2	0.40	4.80	5400	45.76	1.30	8.47	43.3
R127020SL	12	7~13.2	0.20	2.40	3600	30.51	0.86	3.76	33.3
R127020SM	12	7~13.2	0.26	3.12	4200	35.59	1.01	5.12	37
R127020SH	12	7~13.2	0.30	3.60	4800	40.67	1.15	6.69	40.7
R127020SU	12	7~13.2	0.40	4.80	5400	45.76	1.30	8.47	43.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

EVERFLOW

MOTOR YOUR LIFE

EVERFLOW**70×70×25MM SERIES**

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 53g

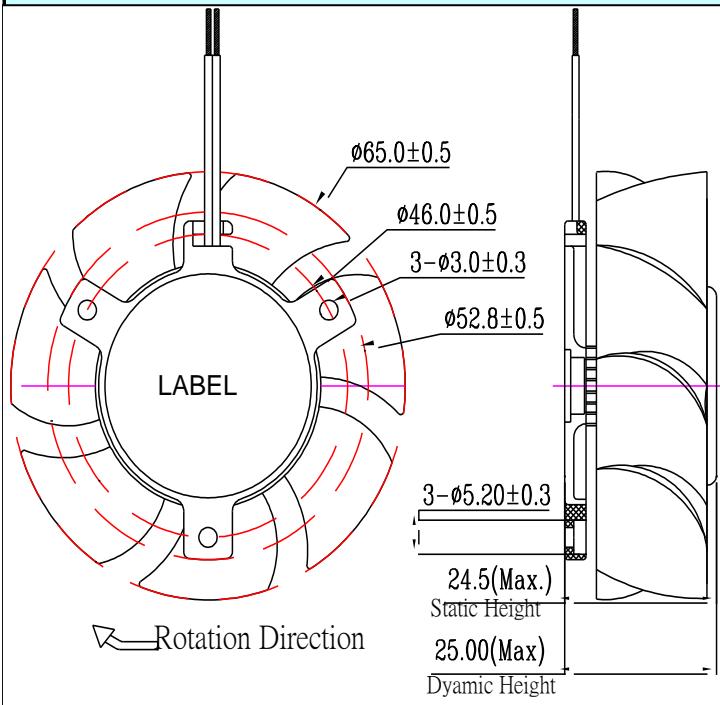

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

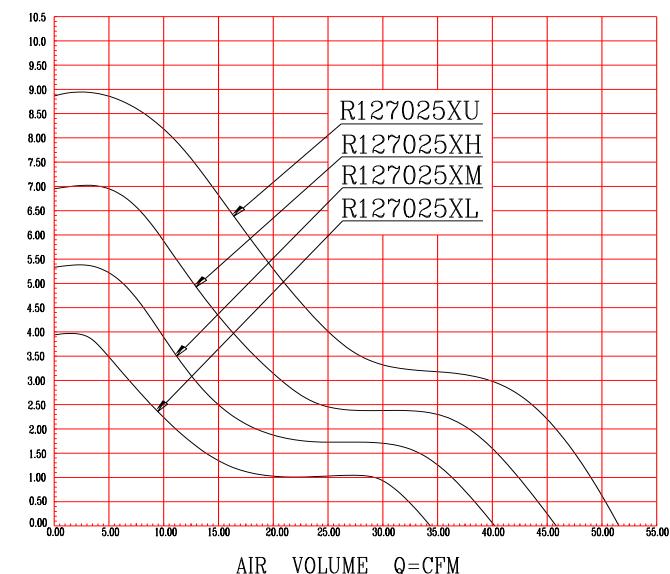AIR PRESSURE(mmH₂O)

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127025BL	12	7~13.2	0.15	1.80	3600	34.39	0.97	3.91	33.5
R127025BM	12	7~13.2	0.25	3.00	4200	40.13	1.14	5.32	35.3
R127025BH	12	7~13.2	0.30	3.60	4800	45.86	1.30	6.95	40
R127025BU	12	7~13.2	0.40	4.80	5400	51.59	1.46	8.80	43.8
R127025SL	12	7~13.2	0.15	1.80	3600	34.39	0.97	3.91	33.5
R127025SM	12	7~13.2	0.25	3.00	4200	40.13	1.14	5.32	35.3
R127025SH	12	7~13.2	0.30	3.60	4800	45.86	1.30	6.95	40
R127025SU	12	7~13.2	0.40	4.80	5400	51.59	1.46	8.80	43.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

70×70×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 70g

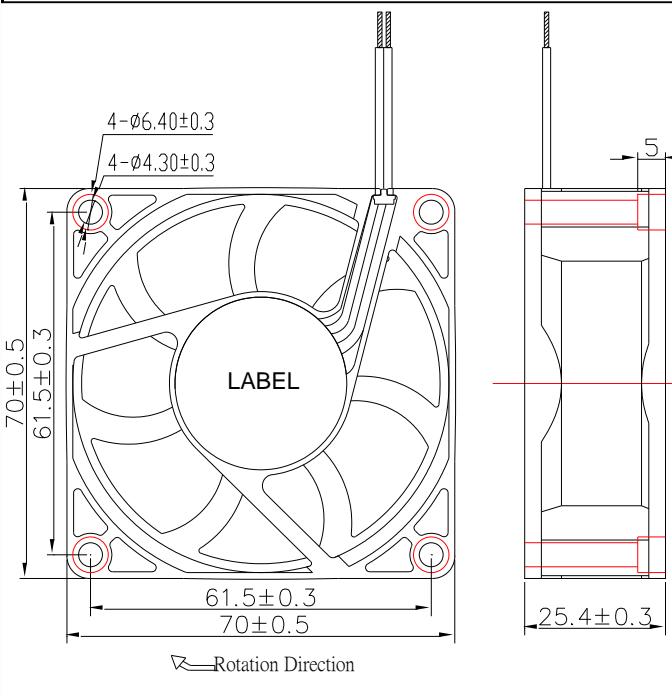

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

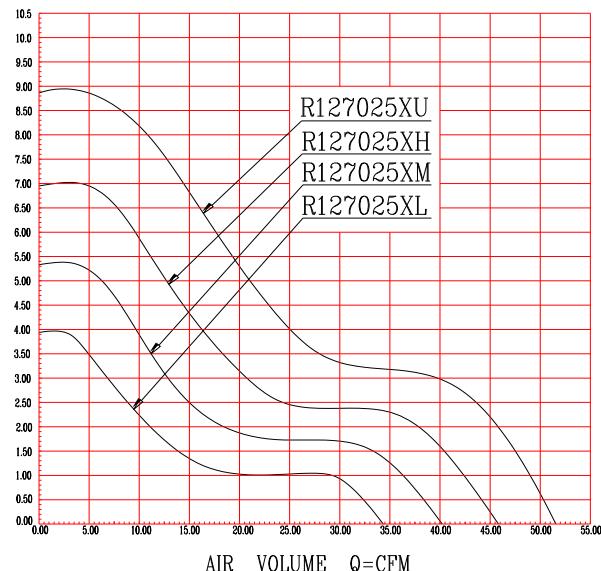

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127025BL	12	7~13.2	0.15	1.80	3600	34.39	0.97	3.91	33.5
R127025BM	12	7~13.2	0.25	3.00	4200	40.13	1.14	5.32	35.3
R127025BH	12	7~13.2	0.30	3.60	4800	45.86	1.30	6.95	40
R127025BU	12	7~13.2	0.40	4.80	5400	51.59	1.46	8.80	43.8
R127025SL	12	7~13.2	0.15	1.80	3600	34.39	0.97	3.91	33.5
R127025SM	12	7~13.2	0.25	3.00	4200	40.13	1.14	5.32	35.3
R127025SH	12	7~13.2	0.30	3.60	4800	45.86	1.30	6.95	40
R127025SU	12	7~13.2	0.40	4.80	5400	51.59	1.46	8.80	43.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

70×70×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 70g

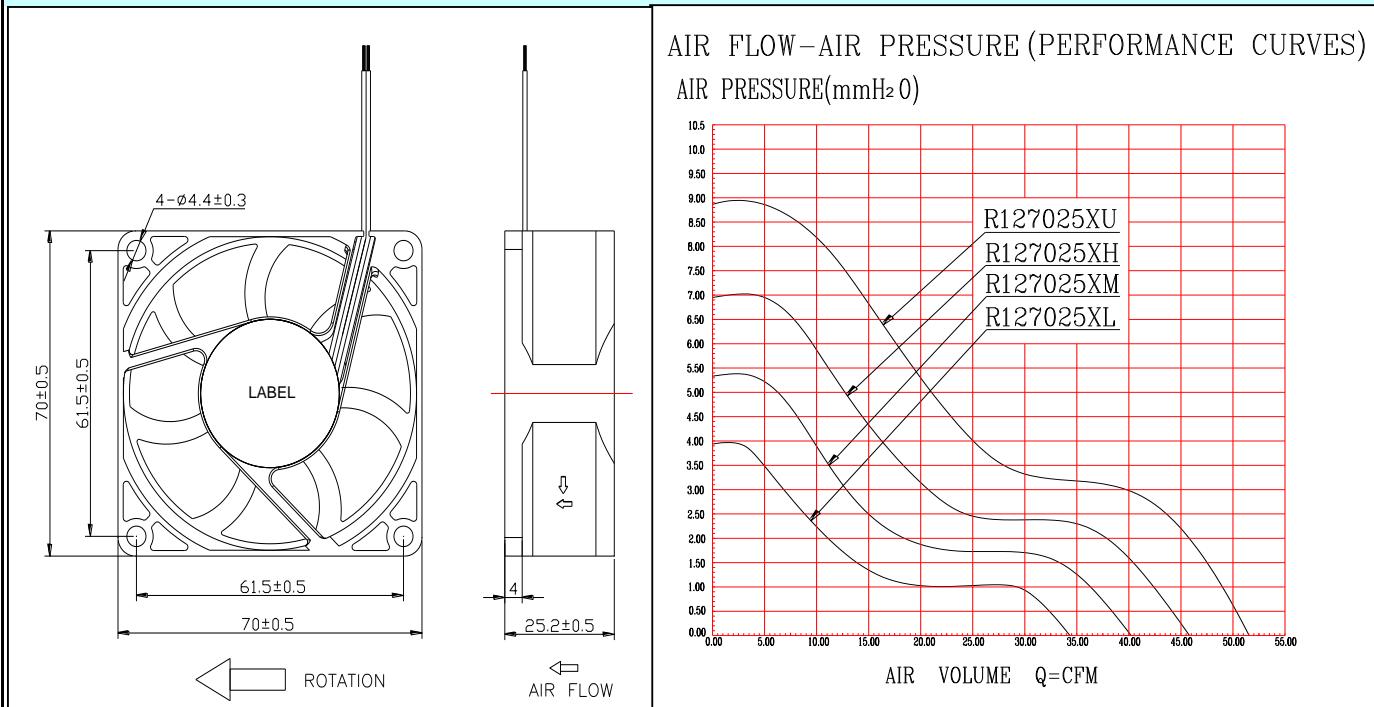

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127025BL	12	7~13.2	0.15	1.80	3600	34.39	0.97	3.91	33.5
R127025BM	12	7~13.2	0.25	3.00	4200	40.13	1.14	5.32	35.3
R127025BH	12	7~13.2	0.30	3.60	4800	45.86	1.30	6.95	40
R127025BU	12	7~13.2	0.40	4.80	5400	51.59	1.46	8.80	43.8
R127025SL	12	7~13.2	0.15	1.80	3600	34.39	0.97	3.91	33.5
R127025SM	12	7~13.2	0.25	3.00	4200	40.13	1.14	5.32	35.3
R127025SH	12	7~13.2	0.30	3.60	4800	45.86	1.30	6.95	40
R127025SU	12	7~13.2	0.40	4.80	5400	51.59	1.46	8.80	43.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

70×70×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 70g

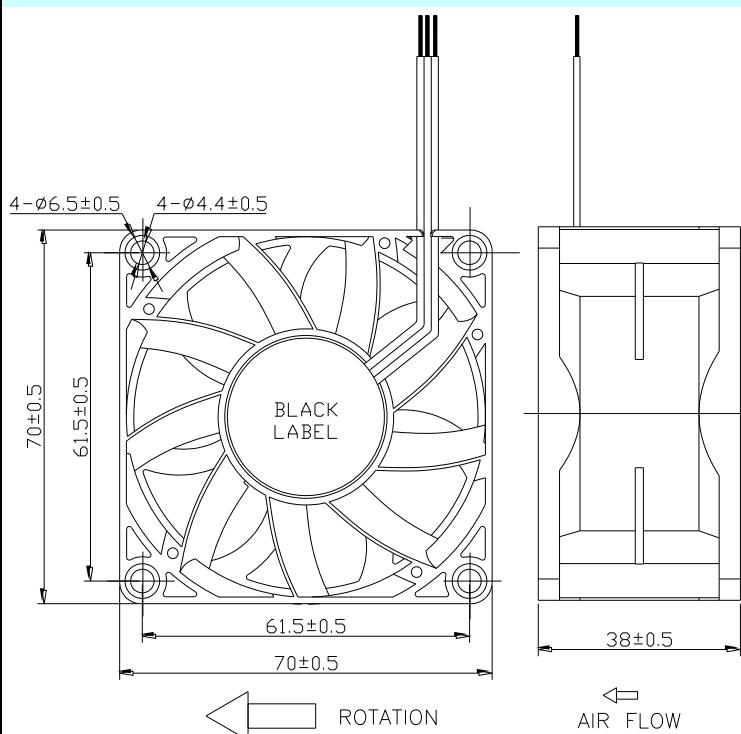

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

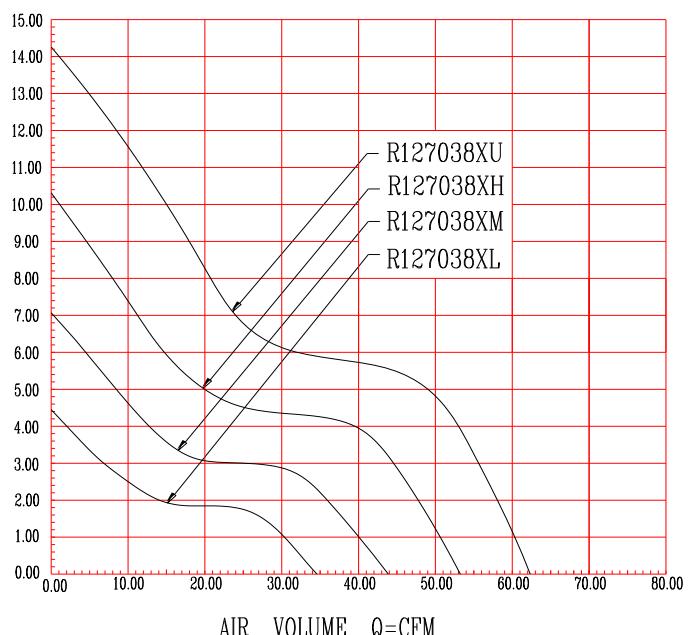

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R127038BL	12	7~13.2	0.28	3.36	3800	34.83	0.99	4.44	35.8
R127038BM	12	7~13.2	0.35	4.20	4800	43.99	1.25	7.09	45
R127038BH	12	7~13.2	0.50	6.00	5800	53.16	1.51	10.35	47.3
R127038BU	12	7~13.2	0.80	9.60	6800	62.32	1.77	14.22	51

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

EVERFLOW

MOTOR YOUR LIFE

EVERFLOW**75×75×15MM SERIES**

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 85g

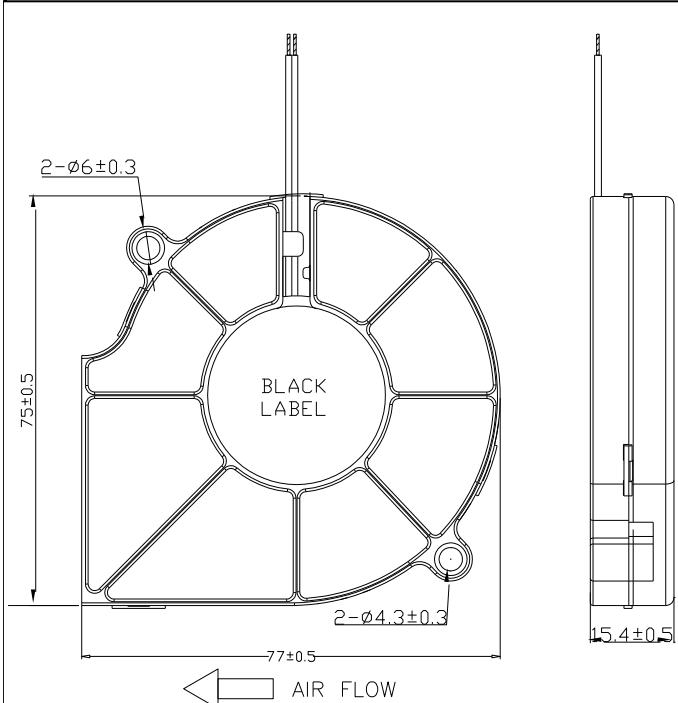

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

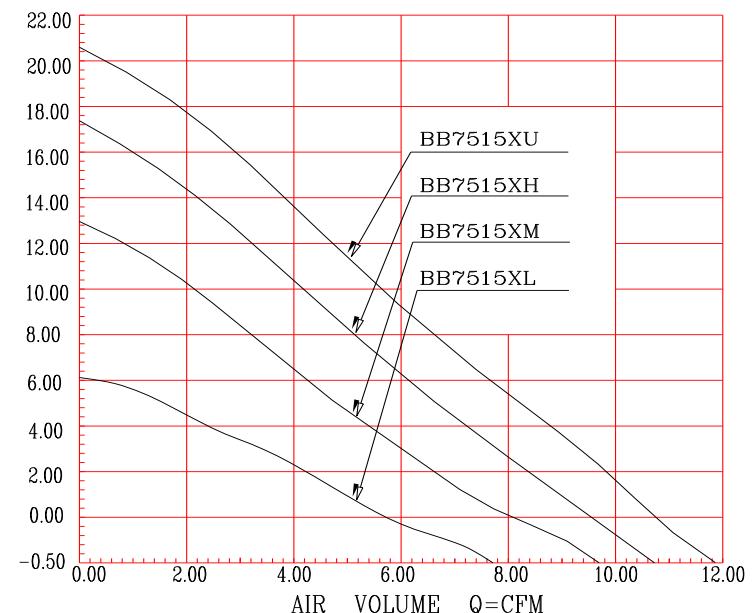AIR PRESSURE(mmH₂O)

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127515BL	12	7~13.2	0.40	4.80	4000	7.55	0.21	17.61	42.7
B127515BM	12	7~13.2	0.50	6.00	4500	8.49	0.24	22.29	47
B127515BH	12	7~13.2	0.60	7.20	5000	9.44	0.27	27.52	49
B127515BU	12	7~13.2	0.80	9.60	5500	10.38	0.29	33.30	51

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

75×75×30MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 85g

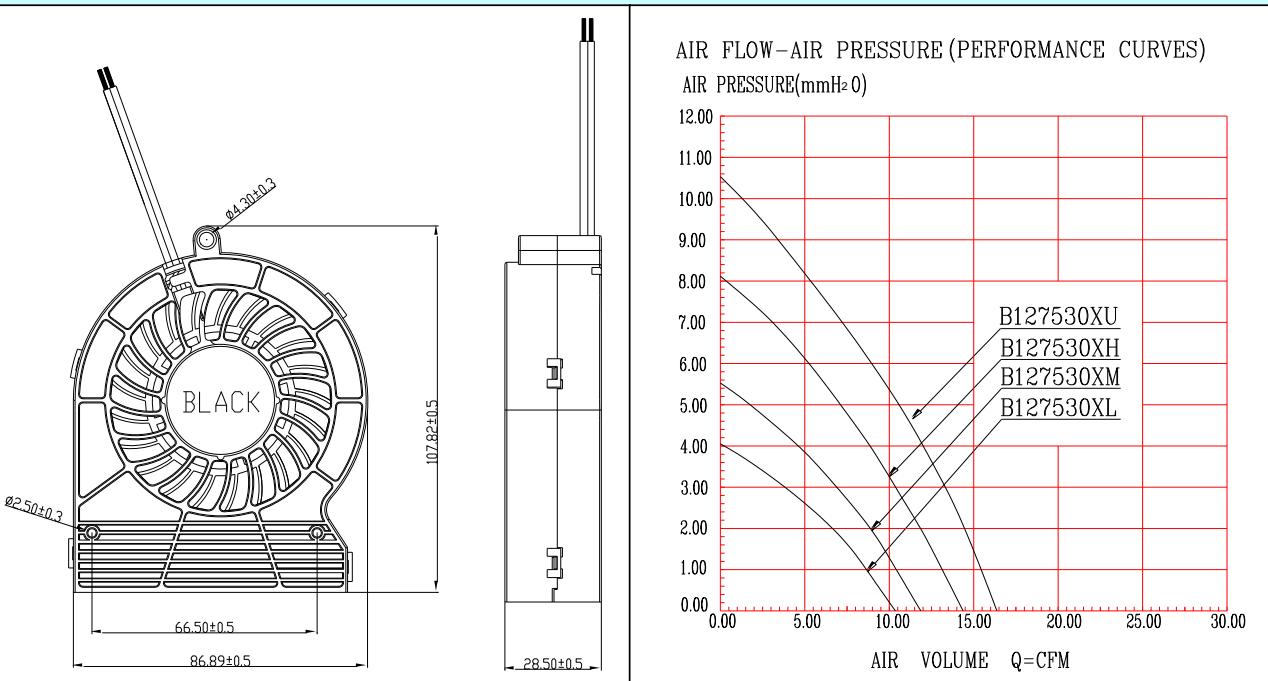

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127530BL	12	7~13.2	0.18	2.16	2050	10.22	0.29	4.08	35.5
B127530BM	12	7~13.2	0.20	2.40	2400	11.97	0.34	5.59	38
B127530BH	12	7~13.2	0.30	3.60	2900	14.46	0.41	8.16	45
B127530BU	12	7~13.2	0.42	5.04	3300	16.45	0.47	10.57	48
B127530BL	12	7~13.2	0.18	2.16	2050	10.22	0.29	4.08	35.5
B127530BM	12	7~13.2	0.20	2.40	2400	11.97	0.34	5.59	38
B127530BH	12	7~13.2	0.30	3.60	2900	14.46	0.41	8.16	45
B127530BU	12	7~13.2	0.42	5.04	3300	16.45	0.47	10.57	48

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

75×75×30MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 85g

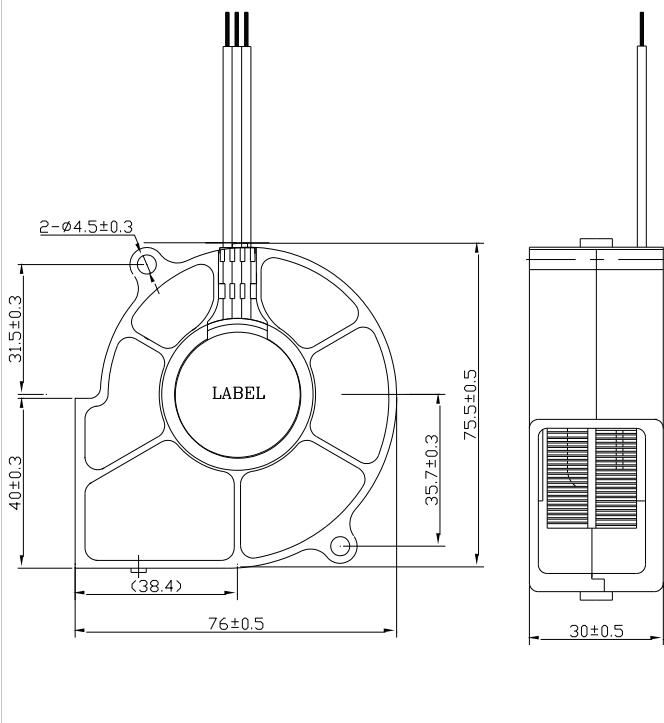

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

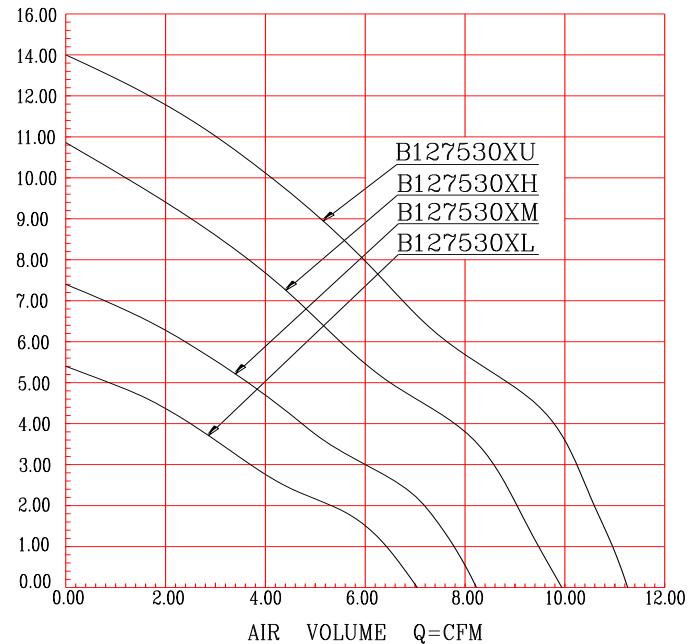

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
B127530BL	12	7~13.2	0.18	2.16	2050	7.01	0.20	5.40	26.7
B127530BM	12	7~13.2	0.20	2.40	2400	8.21	0.23	7.40	31.5
B127530BH	12	7~13.2	0.30	3.60	2900	9.92	0.28	10.81	35.6
B127530BU	12	7~13.2	0.42	5.04	3300	11.29	0.32	14.00	38.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 32g

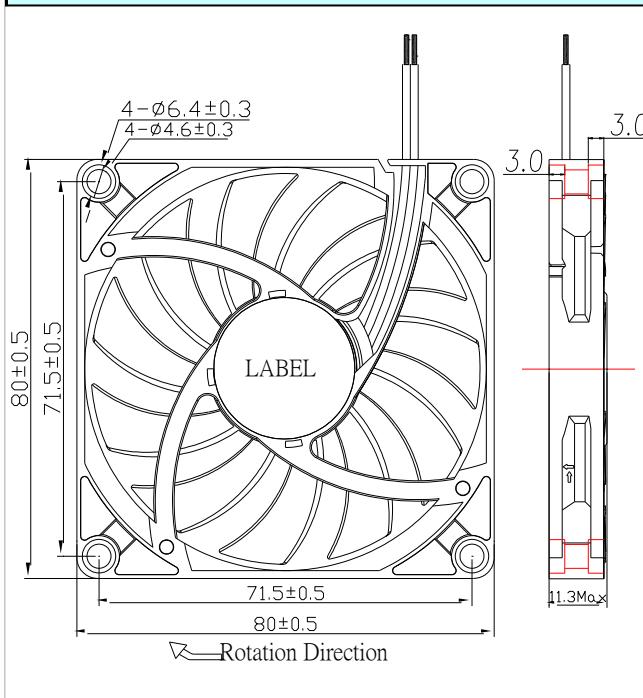

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

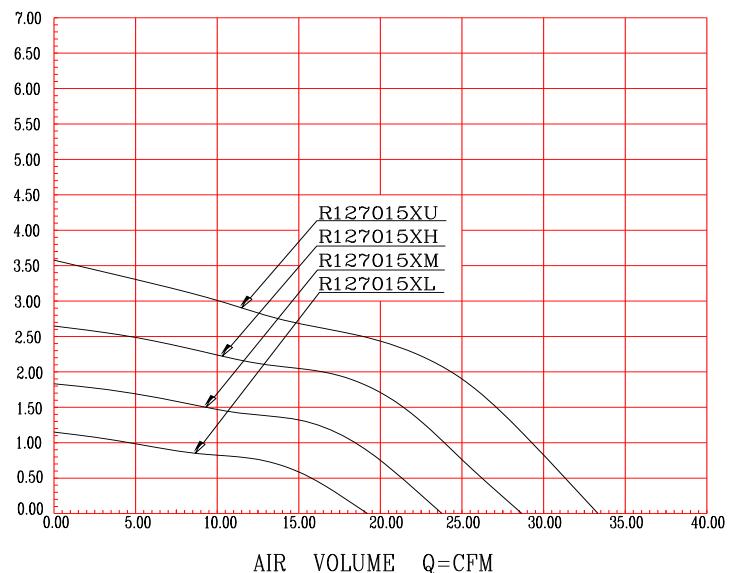

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128010BL	12	7~13.2	0.15	1.8	2400	19.12	0.54	1.17	24
R128010BM	12	7~13.2	0.20	2.40	3000	23.90	0.68	1.83	27.7
R128010BH	12	7~13.2	0.25	3.00	3600	28.68	0.81	2.63	31.8
R128010BU	12	7~13.2	0.35	4.20	4200	33.46	0.95	3.58	36.5
R128010SL	12	7~13.2	0.15	1.8	2400	19.12	0.54	1.17	24
R128010SM	12	7~13.2	0.20	2.40	3000	23.90	0.68	1.83	27.7
R128010SH	12	7~13.2	0.25	3.00	3600	28.68	0.81	2.63	31.8
R128010SU	12	7~13.2	0.35	4.20	4200	33.46	0.95	3.58	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×10MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 5V/12V



Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 24g

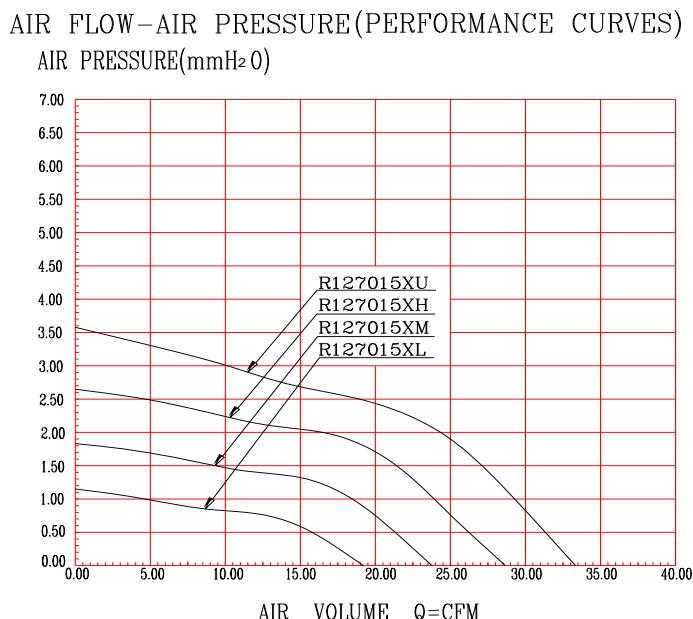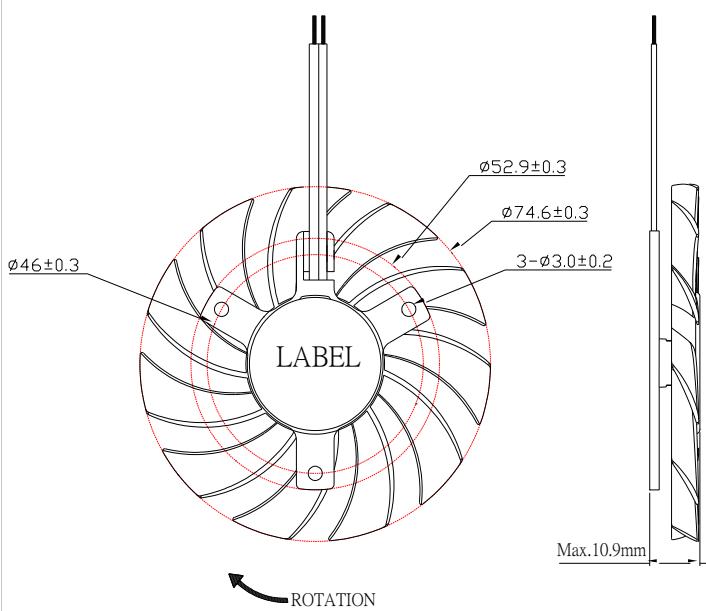

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128010BL	12	7~13.2	0.15	1.8	2400	19.12	0.54	1.17	24
R128010BM	12	7~13.2	0.20	2.40	3000	23.90	0.68	1.83	27.7
R128010BH	12	7~13.2	0.25	3.00	3600	28.68	0.81	2.63	31.8
R128010BU	12	7~13.2	0.35	4.20	4200	33.46	0.95	3.58	36.5
R128010SL	12	7~13.2	0.15	1.8	2400	19.12	0.54	1.17	24
R128010SM	12	7~13.2	0.20	2.40	3000	23.90	0.68	1.83	27.7
R128010SH	12	7~13.2	0.25	3.00	3600	28.68	0.81	2.63	31.8
R128010SU	12	7~13.2	0.35	4.20	4200	33.46	0.95	3.58	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

EVERFLOW

80×80×15MM SERIES

Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing

EBR


Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 34g

Rated Voltage: 12V/24V

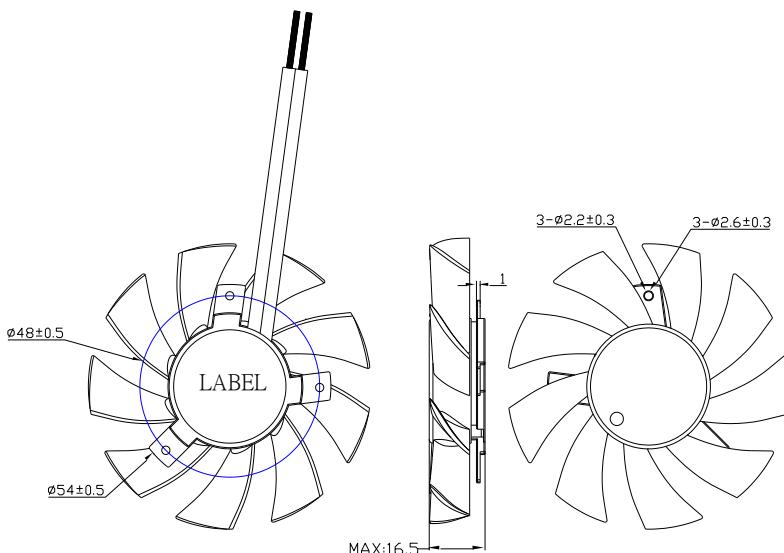

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

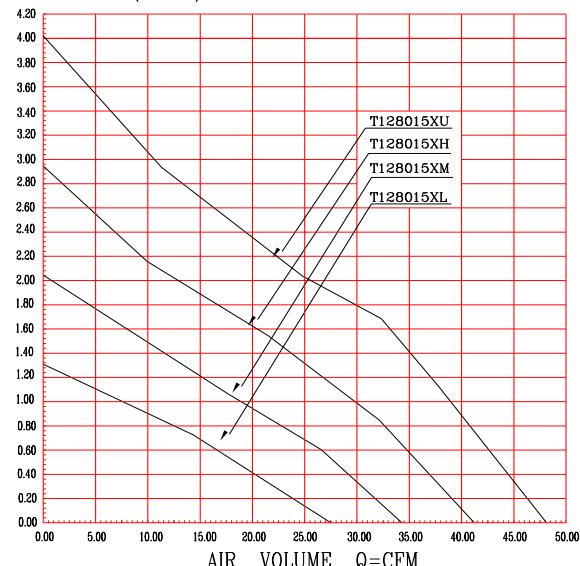

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T128015BL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015BM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015BH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015BU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40
T128015SL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015SM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015SH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015SU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 34g

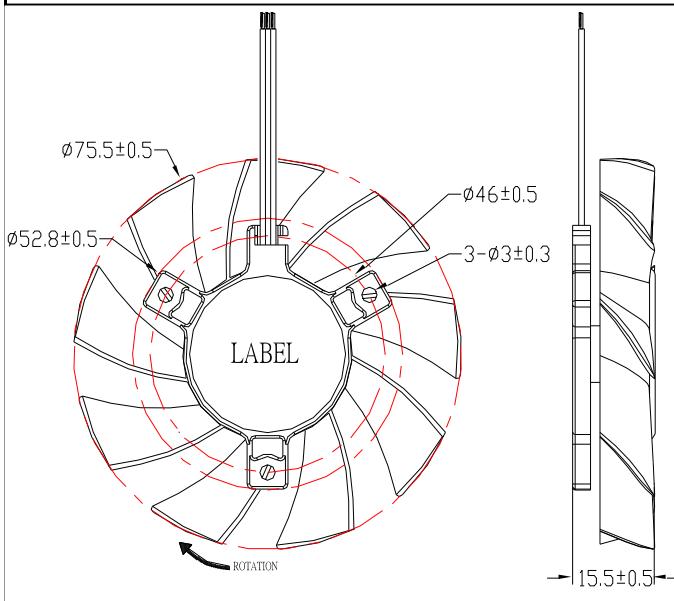

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

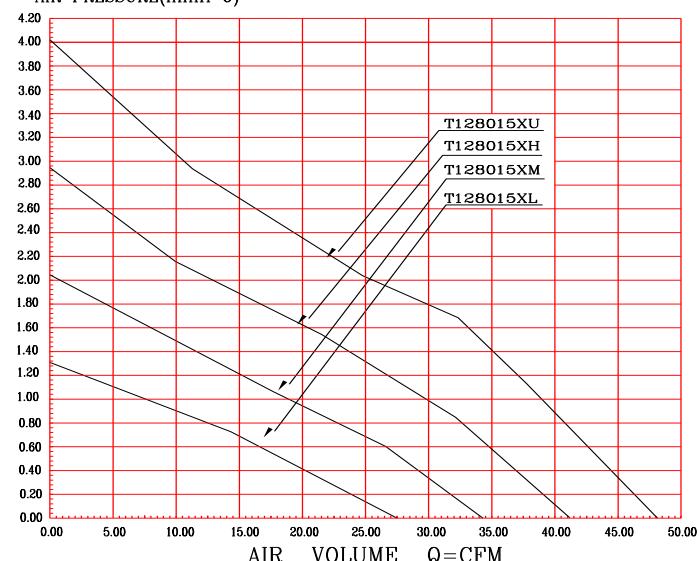

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T128015BL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015BM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015BH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015BU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40
T128015SL	12	7~13.2	0.19	2.28	2400	27.50	0.78	1.31	27.5
T128015SM	12	7~13.2	0.25	3.00	3000	34.38	0.97	2.05	32
T128015SH	12	7~13.2	0.32	3.84	3600	41.26	1.17	2.95	36
T128015SU	12	7~13.2	0.50	6.00	4200	48.14	1.36	4.02	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 56g

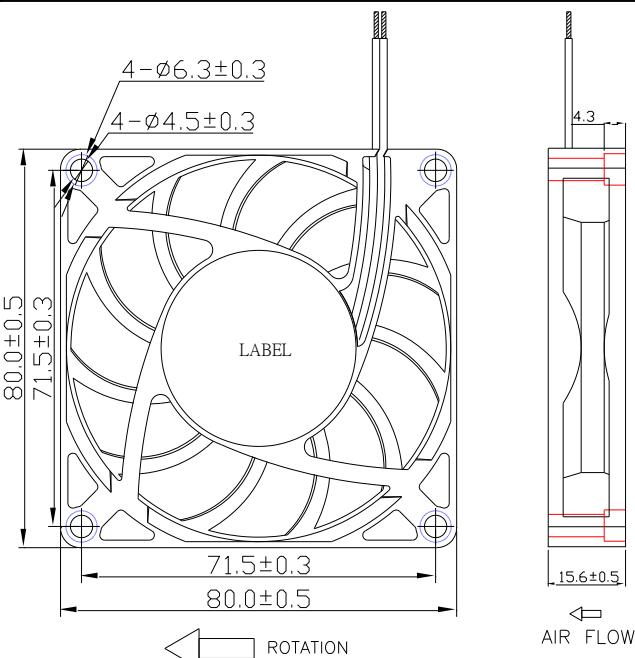

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

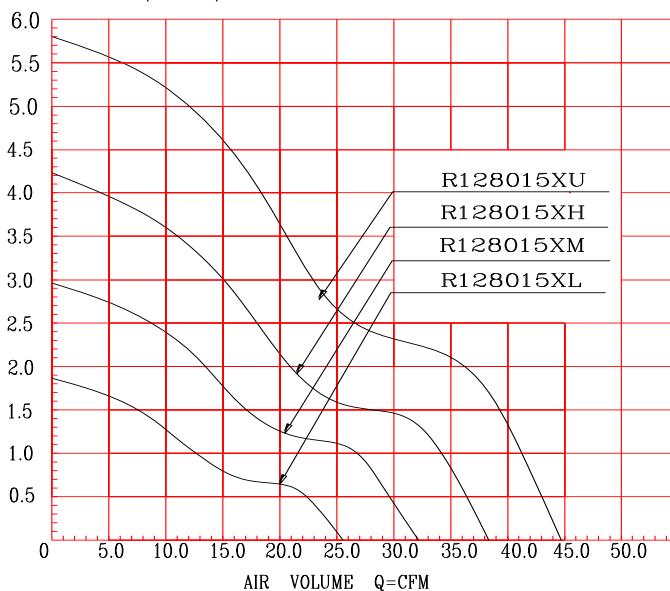

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015BL	12	7~13.2	0.19	2.28	2400	25.62	0.73	1.89	25.5
R128015BM	12	7~13.2	0.25	3.00	3000	32.02	0.91	2.96	31.7
R128015BH	12	7~13.2	0.32	3.84	3600	38.43	1.09	4.26	36.3
R128015BU	12	7~13.2	0.50	2.28	4200	44.83	1.27	5.80	40
R128015SL	12	7~13.2	0.19	3.00	2400	25.62	0.73	1.89	25.5
R128015SM	12	7~13.2	0.25	3.84	3000	32.02	0.91	2.96	31.7
R128015SH	12	7~13.2	0.32	2.28	3600	38.43	1.09	4.26	36.3
R128015SU	12	7~13.2	0.50	3.00	4200	44.83	1.27	5.80	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×15MM SERIES

Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing

EBR


Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 53g

Rated Voltage: 12V/24V

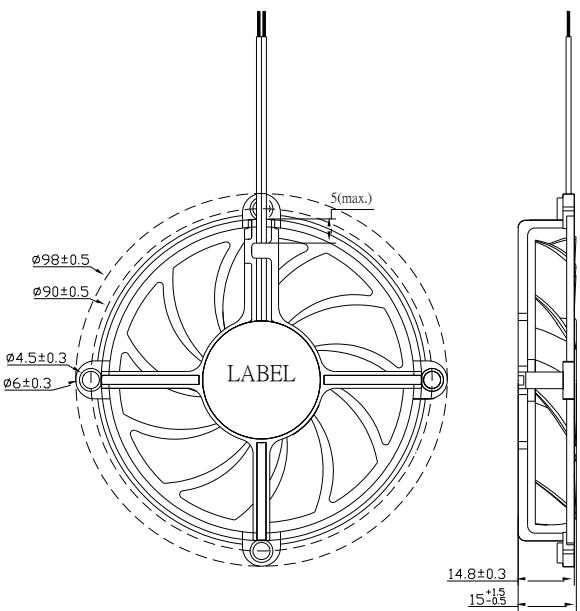

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

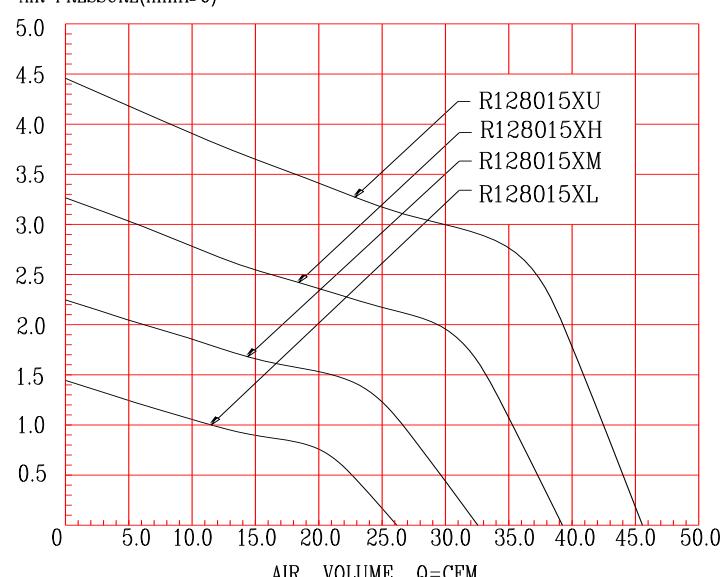

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015BL	12	7~13.2	0.19	2.28	2400	26.09	0.74	1.46	26.6
R128015BM	12	7~13.2	0.25	3.00	3000	32.61	0.92	2.28	31
R128015BH	12	7~13.2	0.32	3.84	3600	39.13	1.11	3.28	36.8
R128015BU	12	7~13.2	0.50	6.00	4200	45.65	1.29	4.47	39.9
R128015SL	12	7~13.2	0.19	2.28	2400	26.09	0.74	1.46	26.6
R128015SM	12	7~13.2	0.25	3.00	3000	32.61	0.92	2.28	31
R128015SH	12	7~13.2	0.32	3.84	3600	39.13	1.11	3.28	36.8
R128015SU	12	7~13.2	0.50	6.00	4200	45.65	1.29	4.47	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

EVERFLOW

80×80×15MM SERIES

Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing

EBR


Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 53g

Rated Voltage: 12V/24V

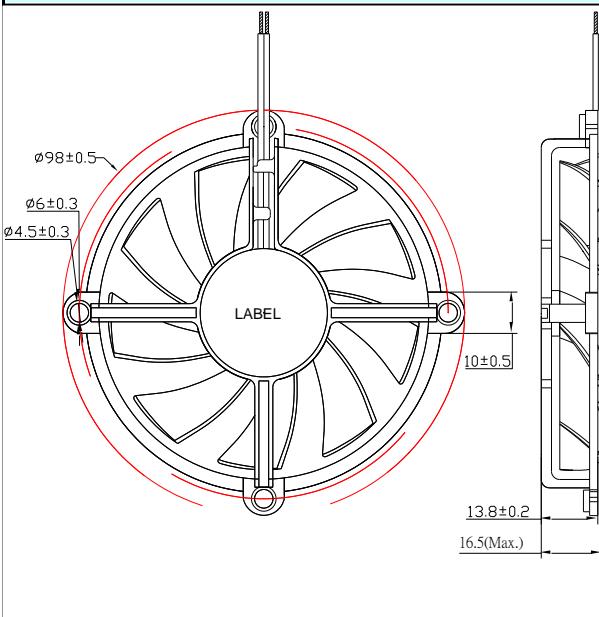

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

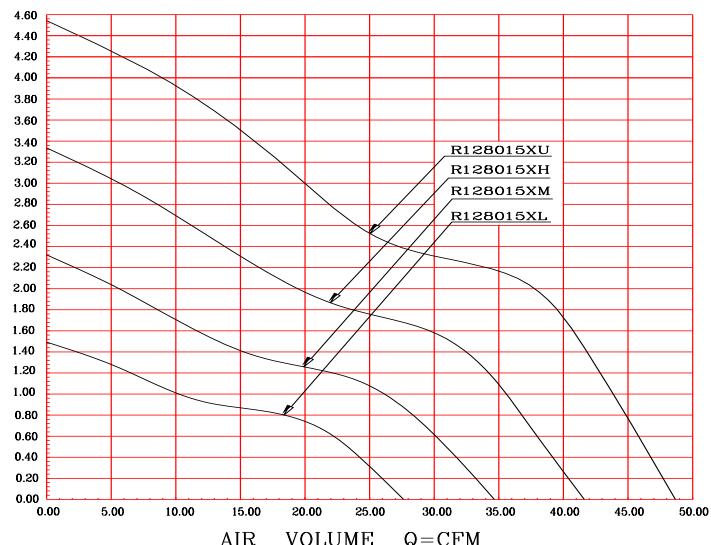

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015BL	12	7~13.2	0.19	2.28	2400	27.89	0.79	1.49	26.30
R128015BM	12	7~13.2	0.25	3.00	3000	34.86	0.99	2.32	32.10
R128015BH	12	7~13.2	0.32	3.84	3600	41.84	1.19	3.34	37.70
R128015BU	12	7~13.2	0.50	6.00	4200	48.81	1.38	4.55	42.00
R128015SL	12	7~13.2	0.19	2.28	2400	27.89	0.79	1.49	26.3
R128015SM	12	7~13.2	0.25	3.00	3000	34.86	0.99	2.32	32.1
R128015SH	12	7~13.2	0.32	3.84	3600	41.84	1.19	3.34	37.7
R128015SU	12	7~13.2	0.50	6.00	4200	48.81	1.38	4.55	42.0

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×15MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 34g

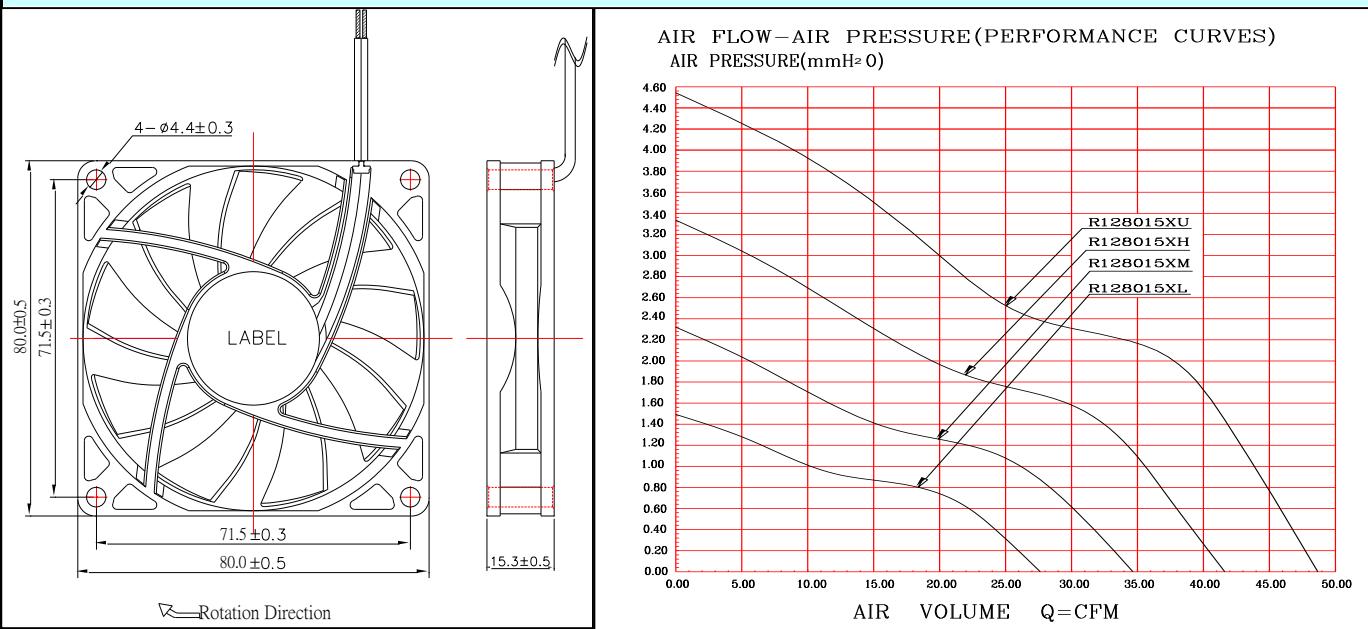

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH₂O)	Sound level dB(A)
						(CFM)	m³/min		
R128015BL	12	7~13.2	0.19	2.28	2400	27.89	0.79	1.49	26.30
R128015BM	12	7~13.2	0.25	3.00	3000	34.86	0.99	2.32	32.10
R128015BH	12	7~13.2	0.32	3.84	3600	41.84	1.19	3.34	37.70
R128015BU	12	7~13.2	0.50	6.00	4200	48.81	1.38	4.55	42.00
R128015SL	12	7~13.2	0.19	2.28	2400	27.89	0.79	1.49	26.3
R128015SM	12	7~13.2	0.25	3.00	3000	34.86	0.99	2.32	32.1
R128015SH	12	7~13.2	0.32	3.84	3600	41.84	1.19	3.34	37.7
R128015SU	12	7~13.2	0.50	6.00	4200	48.81	1.38	4.55	42.0

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

EVERFLOW

80×80×15MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 56g

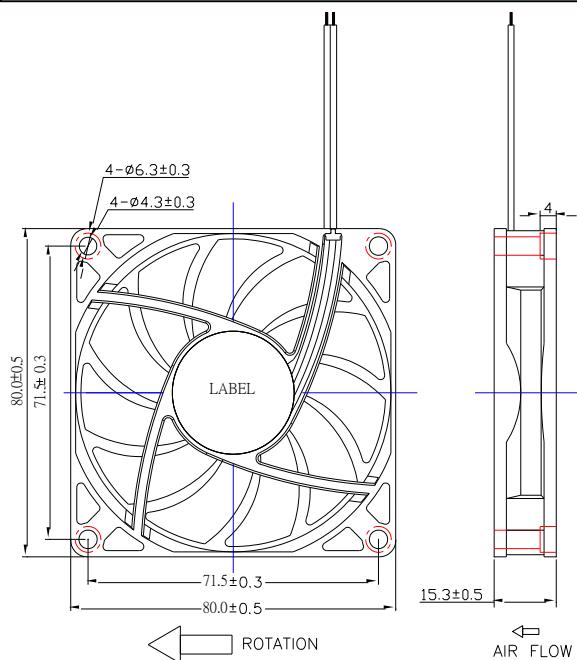

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

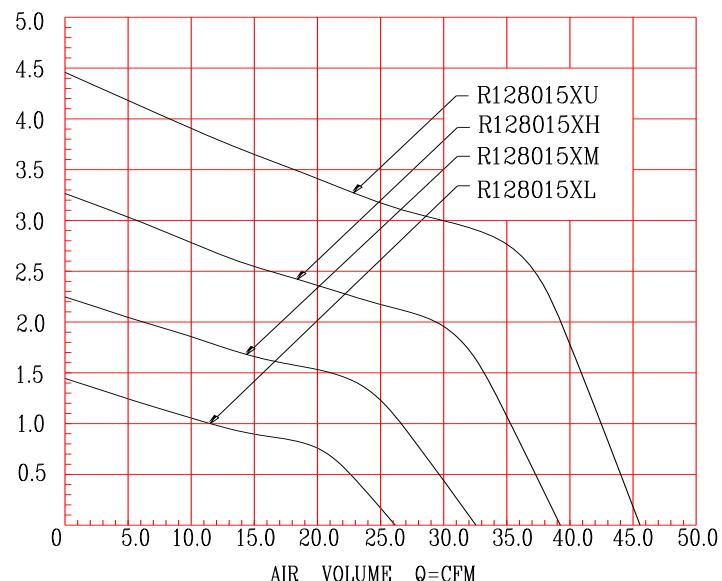

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128015BL	12	7~13.2	0.19	2.28	2400	26.09	0.74	1.46	26.6
R128015BM	12	7~13.2	0.25	3.00	3000	32.61	0.92	2.28	31
R128015BH	12	7~13.2	0.32	3.84	3600	39.13	1.11	3.28	36.8
R128015BU	12	7~13.2	0.50	6.00	4200	45.65	1.29	4.47	39.9
R128015SL	12	7~13.2	0.19	2.28	2400	26.09	0.74	1.46	26.6
R128015SM	12	7~13.2	0.25	3.00	3000	32.61	0.92	2.28	31
R128015SH	12	7~13.2	0.32	3.84	3600	39.13	1.11	3.28	36.8
R128015SU	12	7~13.2	0.50	6.00	4200	45.65	1.29	4.47	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×18MM SERIES

Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing

EBR



Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 56g

Rated Voltage 12V/24V

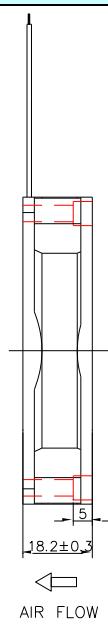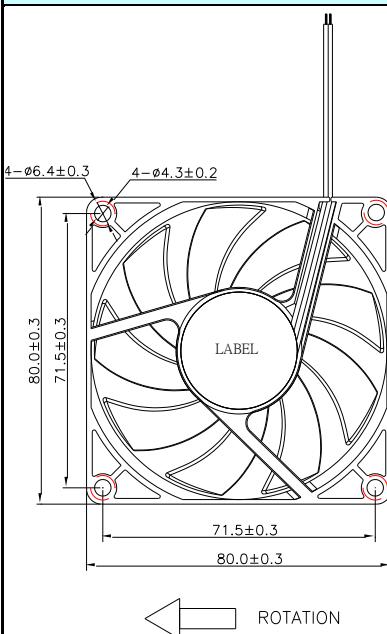

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE (mmH₂O)

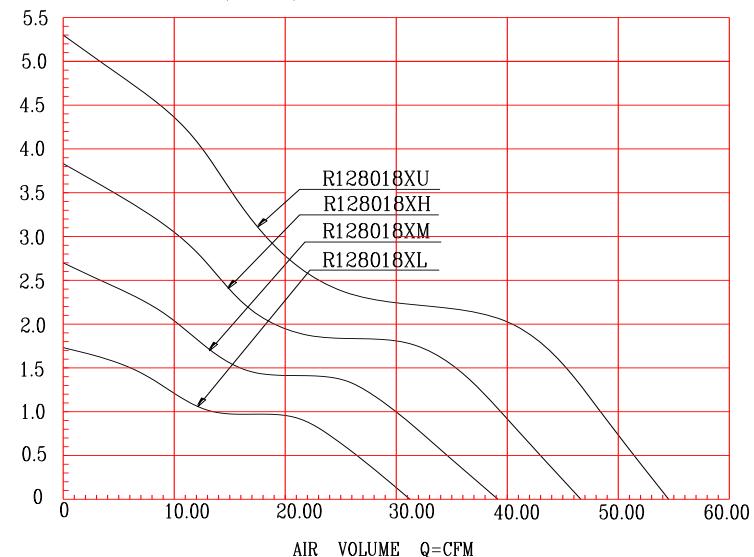

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128018BL	12	7~13.2	0.19	2.28	2400	31.22	0.88	1.73	26.9
R128018BM	12	7~13.2	0.25	3.00	3000	39.03	1.11	2.70	32.5
R128018BH	12	7~13.2	0.32	3.84	3600	46.83	1.33	3.89	36.9
R128018BU	12	7~13.2	0.50	6.00	4200	54.64	1.55	5.30	41.2
R128018SL	12	7~13.2	0.19	2.28	2400	31.22	0.88	1.73	26.9
R128018SM	12	7~13.2	0.25	3.00	3000	39.03	1.11	2.70	32.5
R128018SH	12	7~13.2	0.32	3.84	3600	46.83	1.33	3.89	36.9
R128018SU	12	7~13.2	0.50	6.00	4200	54.64	1.55	5.30	41.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×20MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 55g

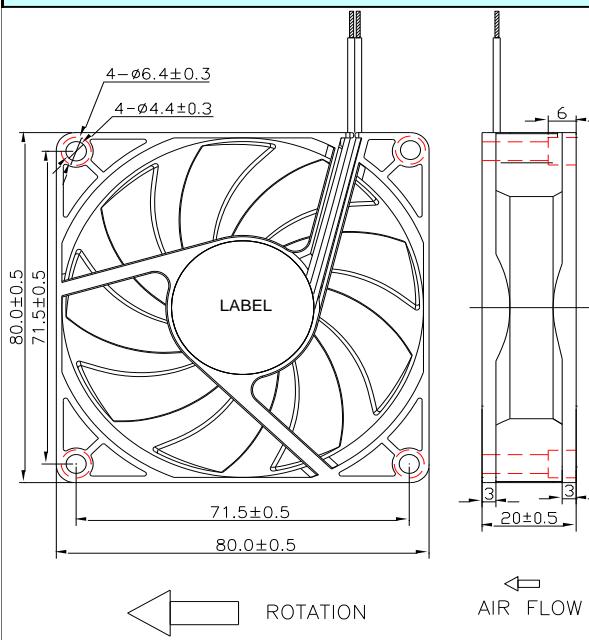

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE mm/H₂O

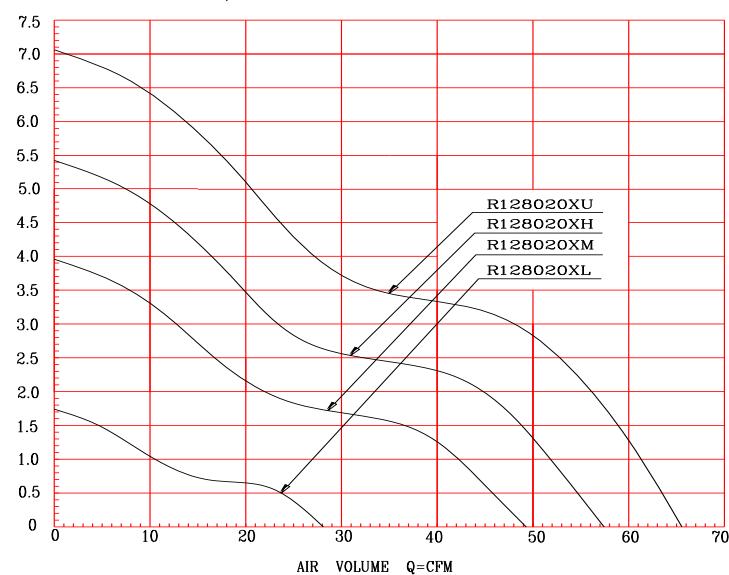

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128020BL	12	7~13.2	0.20	2.40	2400	32.75	0.93	1.77	30.6
R128020BM	12	7~13.2	0.40	4.80	3600	49.13	1.39	3.98	39.5
R128020BH	12	7~13.2	0.55	6.60	4200	57.32	1.62	5.41	42.8
R128020BU	12	7~13.2	1.00	12.00	4800	65.51	1.86	7.07	45.7
R128020SL	12	7~13.2	0.20	2.40	2400	32.75	0.93	1.77	30.6
R128020SM	12	7~13.2	0.40	4.80	3600	49.13	1.39	3.98	39.5
R128020SH	12	7~13.2	0.55	6.60	4200	57.32	1.62	5.41	42.8
R128020SU	12	7~13.2	1.00	12.00	4800	65.51	1.86	7.07	45.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×20MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V




Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 55g

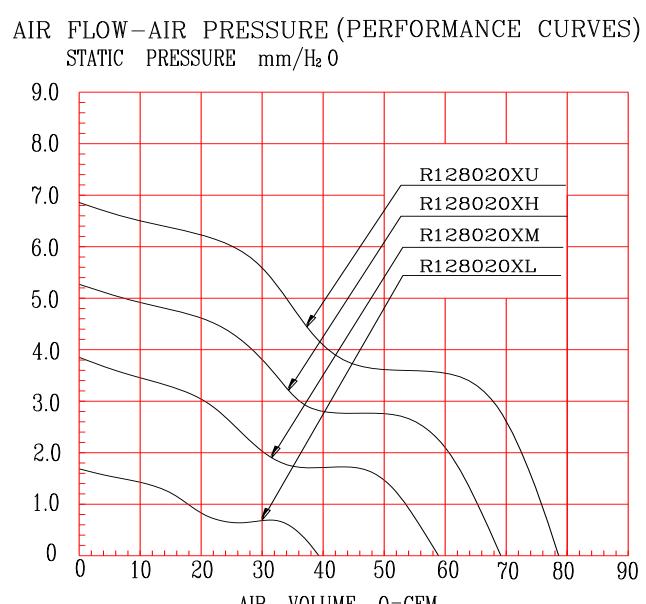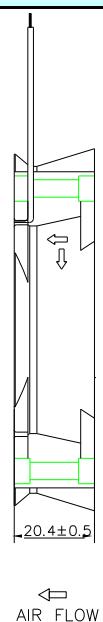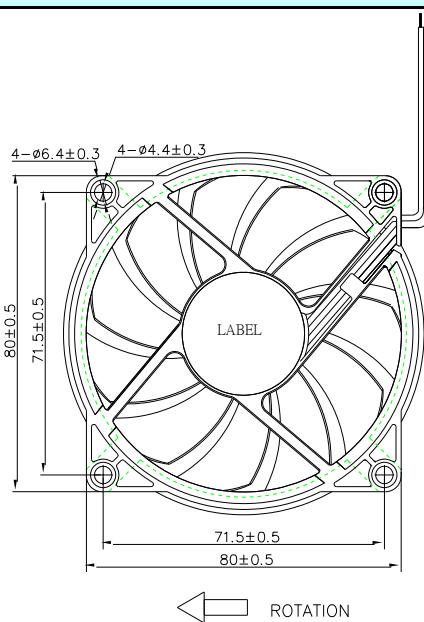

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128020BL	12	7~13.2	0.20	2.40	2400	39.19	1.11	1.71	27
R128020BM	12	7~13.2	0.40	4.80	3600	58.79	1.67	3.85	37.5
R128020BH	12	7~13.2	0.55	6.6	4200	68.59	1.94	5.24	42.2
R128020BU	12	7~13.2	1.00	12	4800	78.38	2.22	6.84	45
R128020SL	12	7~13.2	0.20	2.40	2400	39.19	1.11	1.71	27
R128020SM	12	7~13.2	0.40	4.80	3600	58.79	1.67	3.85	37.5
R128020SH	12	7~13.2	0.55	6.6	4200	68.59	1.94	5.24	42.2
R128020BU	12	7~13.2	1.00	12	4800	78.38	2.22	6.84	45

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

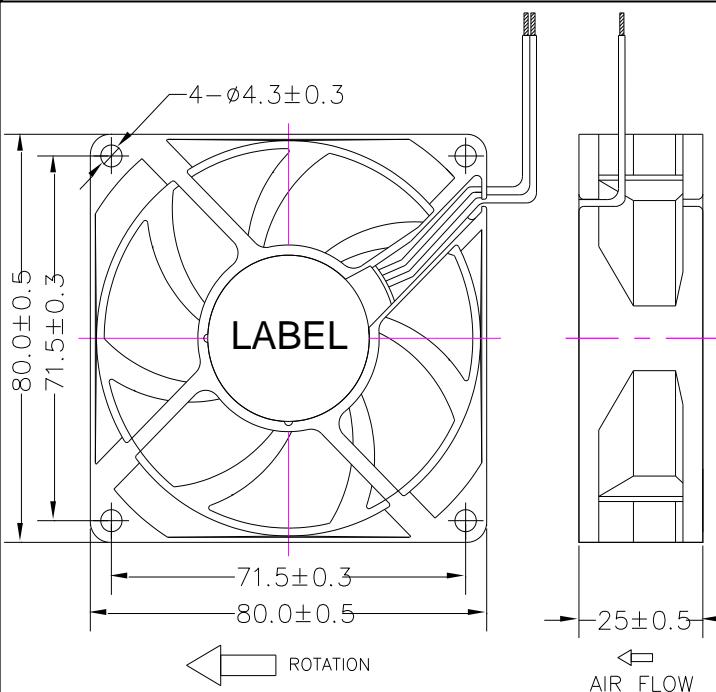

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

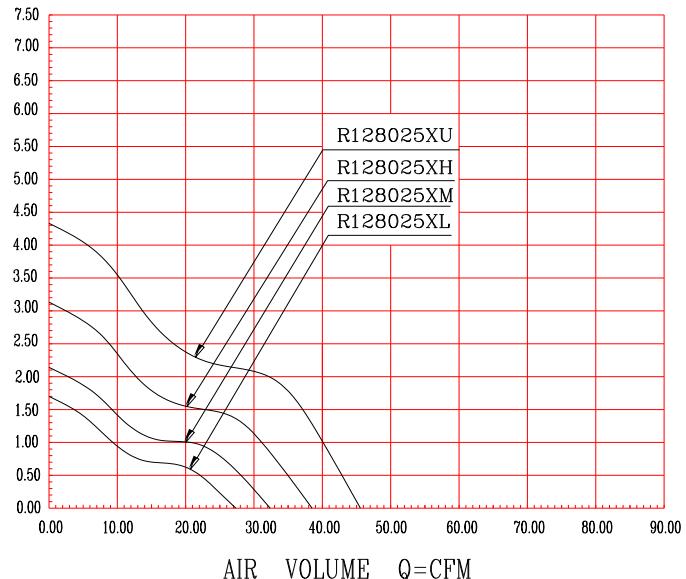

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128025BL	12	7~13.2	0.10	1.20	2050	27.44	0.78	1.57	26
R128025BM	12	7~13.2	0.14	1.68	2400	32.13	0.91	2.15	29
R128025BH	12	7~13.2	0.19	2.28	2900	38.82	1.10	3.14	32.5
R128025BU	12	7~13.2	0.24	2.88	3400	45.52	1.29	4.31	36.5
R128025SL	12	7~13.2	0.09	1.08	2050	27.44	0.78	1.57	26
R128025SM	12	7~13.2	0.14	1.68	2400	32.13	0.91	2.15	29
R128025SH	12	7~13.2	0.19	2.28	2900	38.82	1.10	3.14	32.5
R128025SU	12	7~13.2	0.28	3.36	3400	45.52	1.29	4.31	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

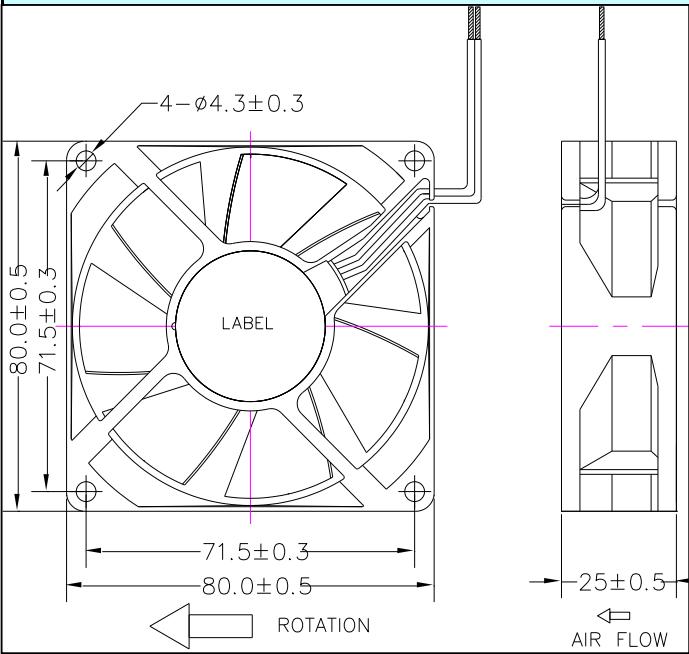

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

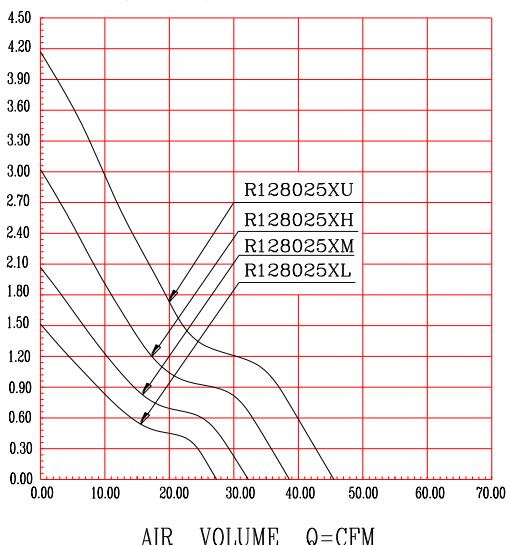

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128025BL	12	7~13.2	0.10	1.20	2050	27.41	0.78	1.51	25.5
R128025BM	12	7~13.2	0.14	1.68	2400	32.09	0.91	2.07	28.7
R128025BH	12	7~13.2	0.19	2.28	2900	38.77	1.10	3.03	32.5
R128025BU	12	7~13.2	0.24	2.88	3400	45.46	1.29	4.16	35.3
R128025SL	12	7~13.2	0.09	1.08	2050	27.41	0.78	1.51	25.5
R128025SM	12	7~13.2	0.14	1.68	2400	32.09	0.91	2.07	28.7
R128025SH	12	7~13.2	0.19	2.28	2900	38.77	1.10	3.03	32.5
R128025SU	12	7~13.2	0.28	3.36	3400	45.46	1.29	4.16	35.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80x80x25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

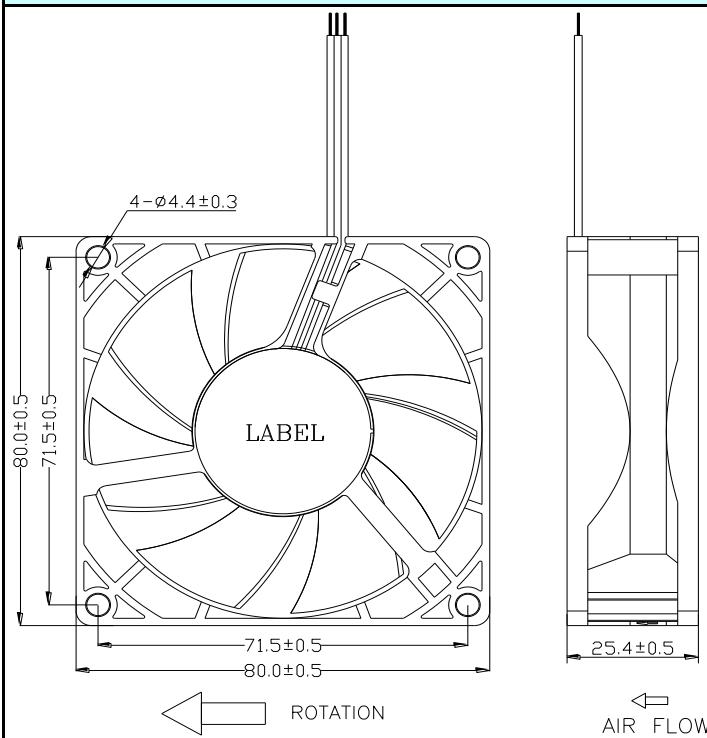

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

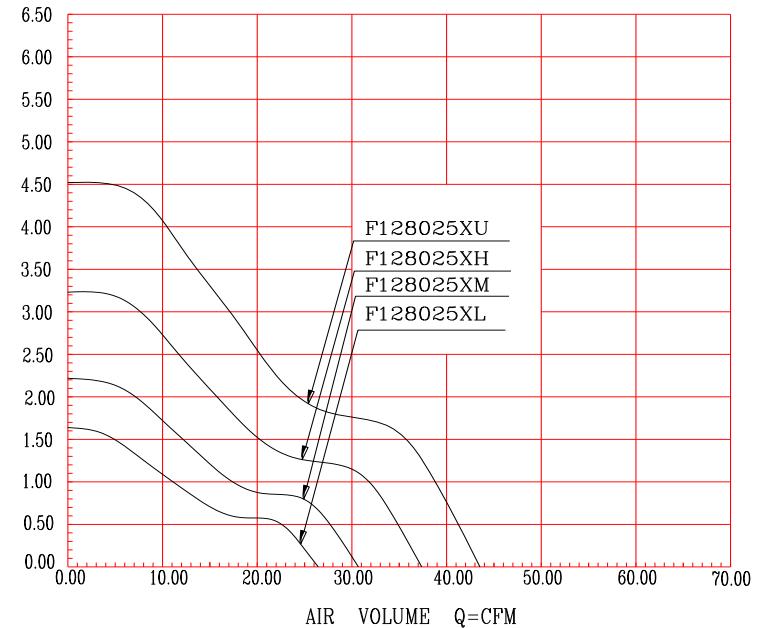

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128025BL	12	7~13.2	0.10	1.20	2050	26.34	0.75	1.64	26
R128025BM	12	7~13.2	0.14	1.68	2400	30.83	0.87	2.25	29.8
R128025BH	12	7~13.2	0.19	2.28	2900	37.26	1.06	3.28	35.9
R128025BU	12	7~13.2	0.24	2.88	3400	43.68	1.24	4.51	39.2
R128025SL	12	7~13.2	0.09	1.08	2050	26.34	0.75	1.64	26
R128025SM	12	7~13.2	0.14	1.68	2400	30.83	0.87	2.25	29.8
R128025SH	12	7~13.2	0.19	2.28	2900	37.26	1.06	3.28	35.9
R128025SU	12	7~13.2	0.28	3.36	3400	43.68	1.24	4.51	39.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80x80x25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 82g

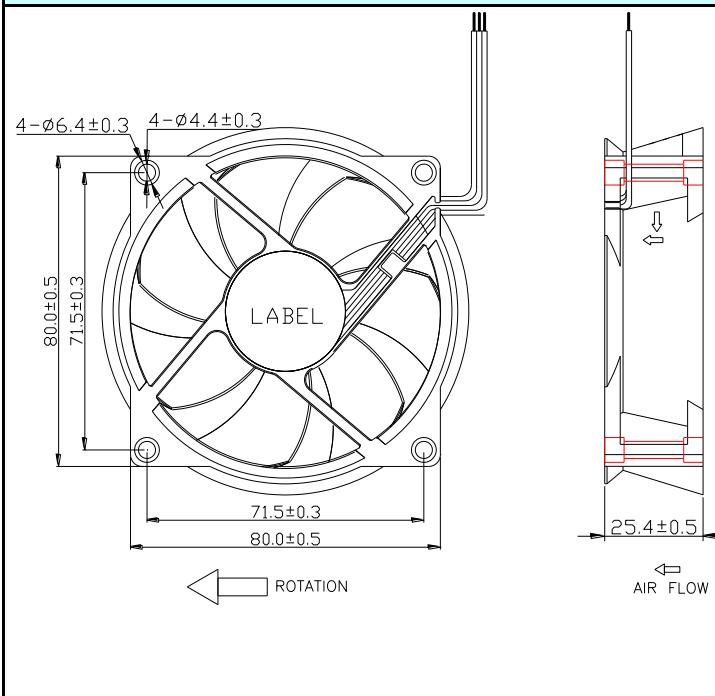

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

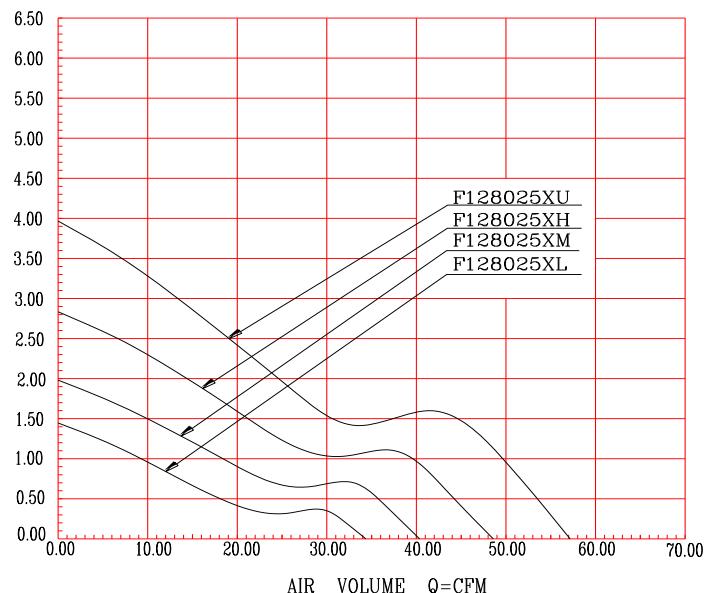

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128025BL	12	7~13.2	0.10	1.20	2050	34.38	0.97	1.44	23.7
F128025BM	12	7~13.2	0.14	1.68	2400	40.26	1.14	1.97	28.8
F128025BH	12	7~13.2	0.19	2.28	2900	48.64	1.38	2.88	32.3
F128025BU	12	7~13.2	0.24	2.88	3400	57.03	1.62	3.96	38.5
F128025SL	12	7~13.2	0.09	1.08	2050	34.38	0.97	1.44	23.7
F128025SM	12	7~13.2	0.14	1.68	2400	40.26	1.14	1.97	28.8
F128025SH	12	7~13.2	0.19	2.28	2900	48.64	1.38	2.88	32.3
F128025SU	12	7~13.2	0.28	3.36	3400	57.03	1.62	3.96	38.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80x80x25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

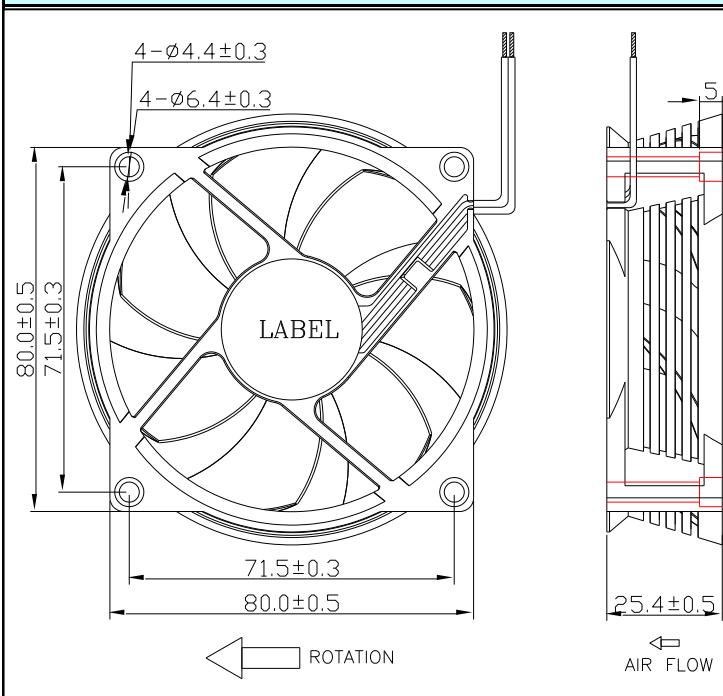

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

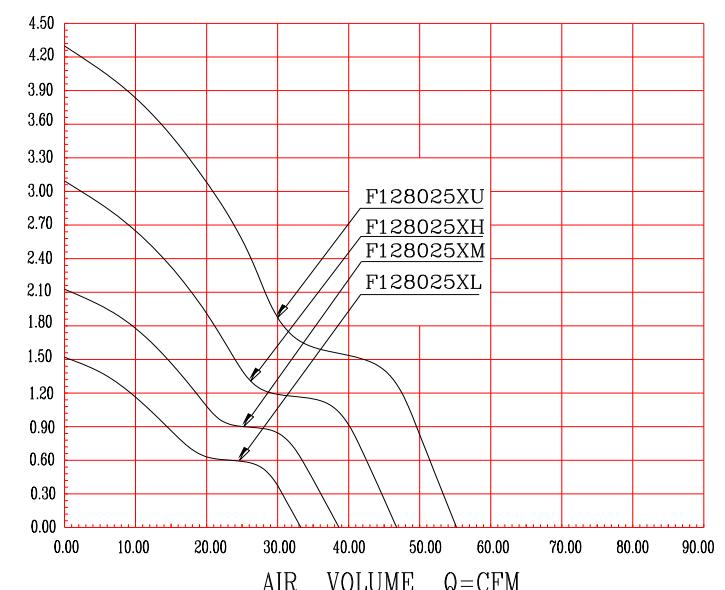

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128025BL	12	7~13.2	0.10	1.20	2050	33.18	0.94	1.56	21.9
F128025BM	12	7~13.2	0.14	1.68	2400	38.85	1.10	2.13	25.3
F128025BH	12	7~13.2	0.19	2.28	2900	46.94	1.33	3.11	30.5
F128025BU	12	7~13.2	0.24	2.88	3400	55.03	1.56	4.28	36.1
F128025SL	12	7~13.2	0.09	1.08	2050	33.18	0.94	1.56	21.9
F128025SM	12	7~13.2	0.14	1.68	2400	38.85	1.10	2.13	25.3
F128025SH	12	7~13.2	0.19	2.28	2900	46.94	1.33	3.11	30.5
F128025SU	12	7~13.2	0.28	3.36	3400	55.03	1.56	4.28	36.1

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×25MM SERIES

Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing

EBR


Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 74g

Rated Voltage 12V/24V

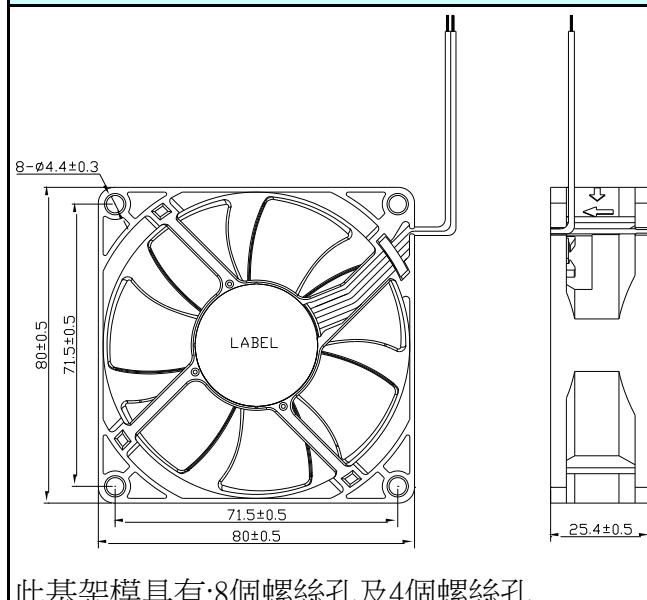

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

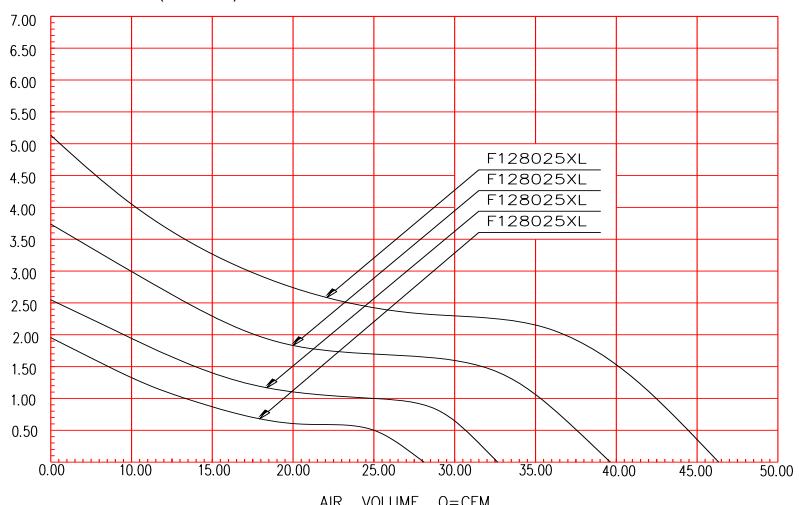

此基架模具有:8個螺絲孔及4個螺絲孔.

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128025BL	12	7~13.2	0.10	1.20	2050	28.01	0.79	1.87	23.2
F128025BM	12	7~13.2	0.14	1.68	2400	32.79	0.93	2.56	25.8
F128025BH	12	7~13.2	0.19	2.28	2900	39.62	1.12	3.74	32.6
F128025BU	12	7~13.2	0.24	2.88	3400	46.45	1.32	5.14	35.5
F128025SL	12	7~13.2	0.09	1.08	2050	28.01	0.79	1.87	23.2
F128025SM	12	7~13.2	0.14	1.68	2400	32.79	0.93	2.56	25.8
F128025SH	12	7~13.2	0.19	2.28	2900	39.62	1.12	3.74	32.6
F128025SU	12	7~13.2	0.28	3.36	3400	46.45	1.32	5.14	35.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 82g

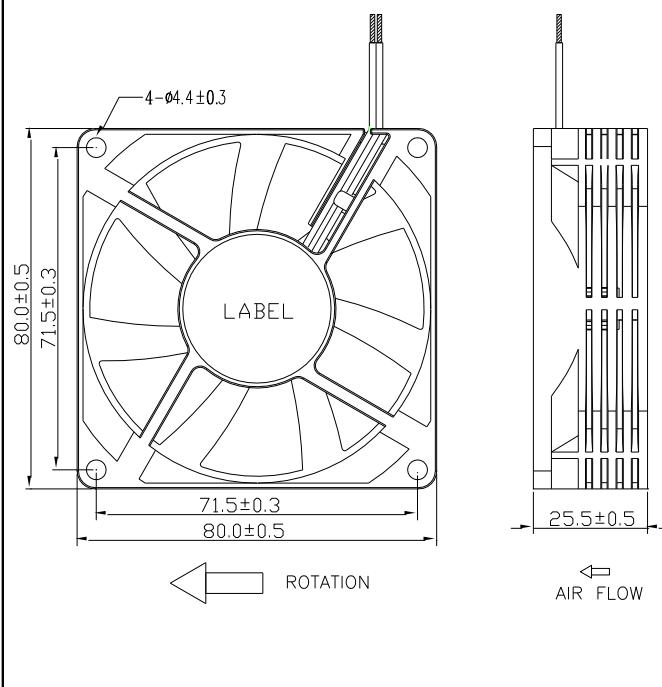

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

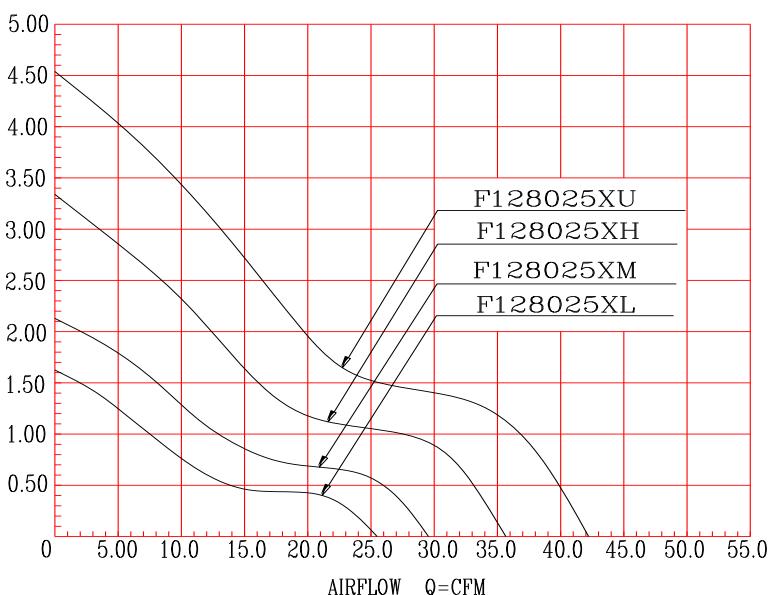

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128025BL	12	7~13.2	0.10	1.20	2050	25.35	0.72	1.66	22.3
F128025BM	12	7~13.2	0.14	1.68	2400	29.68	0.84	2.28	26.4
F128025BH	12	7~13.2	0.19	2.28	2900	35.87	1.02	3.33	30.6
F128025BU	12	7~13.2	0.24	2.88	3400	42.05	1.19	4.57	34.7
F128025SL	12	7~13.2	0.09	1.08	2050	25.35	0.72	1.66	22.3
F128025SM	12	7~13.2	0.14	1.68	2400	29.68	0.84	2.28	26.4
F128025SH	12	7~13.2	0.19	2.28	2900	35.87	1.02	3.33	30.6
F128025SU	12	7~13.2	0.28	3.36	3400	42.05	1.19	4.57	34.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

80×80×32MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 100g

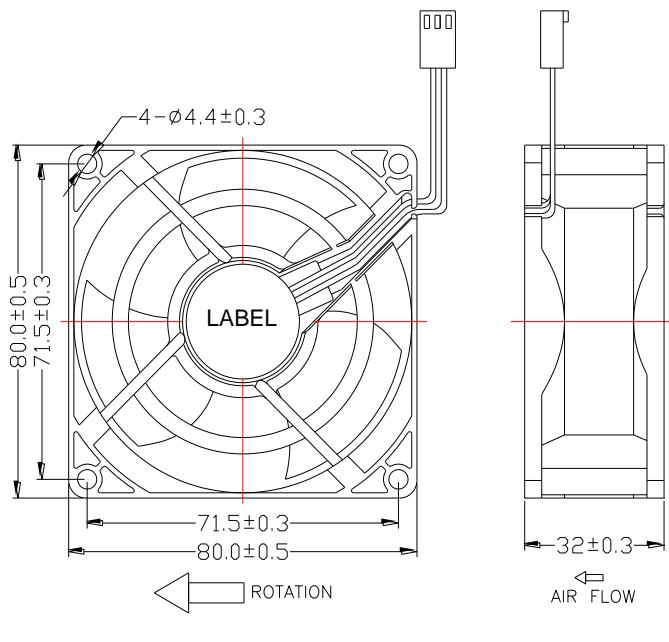

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

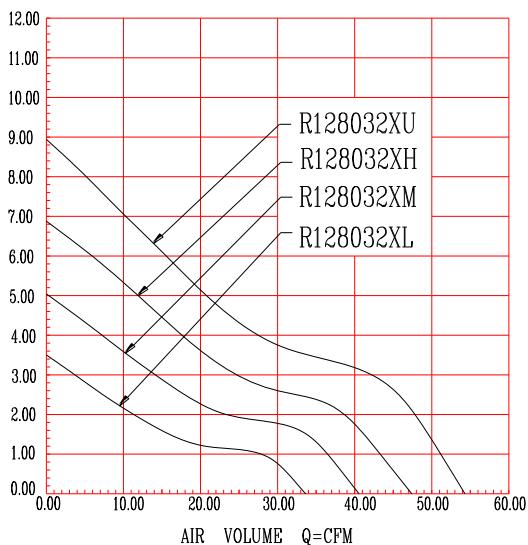

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R128032BL	12	7~13.2	0.22	2.64	3000	33.87	0.96	3.51	27.8
R128032BM	12	7~13.2	0.30	3.60	3600	40.65	1.15	5.05	33.2
R128032BH	12	7~13.2	0.38	4.56	4200	47.42	1.34	6.88	38.7
R128032BU	12	7~13.2	0.45	5.40	4800	54.20	1.54	8.98	42.9
R128032SL	12	7~13.2	0.22	2.64	3000	33.87	0.96	3.51	27.8
R128032SM	12	7~13.2	0.30	3.60	3600	40.65	1.15	5.05	33.2
R128032SH	12	7~13.2	0.38	4.56	4200	47.42	1.34	6.88	38.7
R128032SU	12	7~13.2	0.45	5.40	4800	54.20	1.54	8.98	42.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

80×80×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 139g

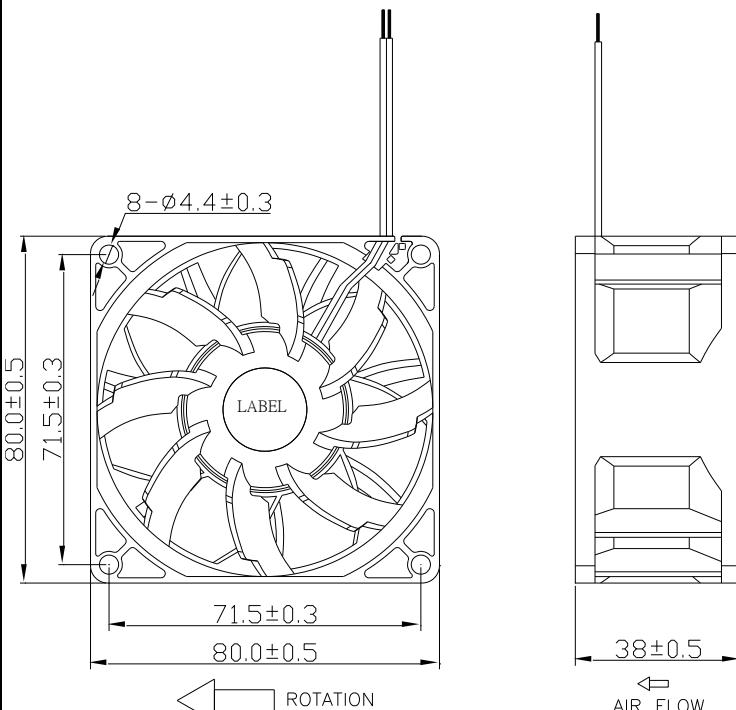

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

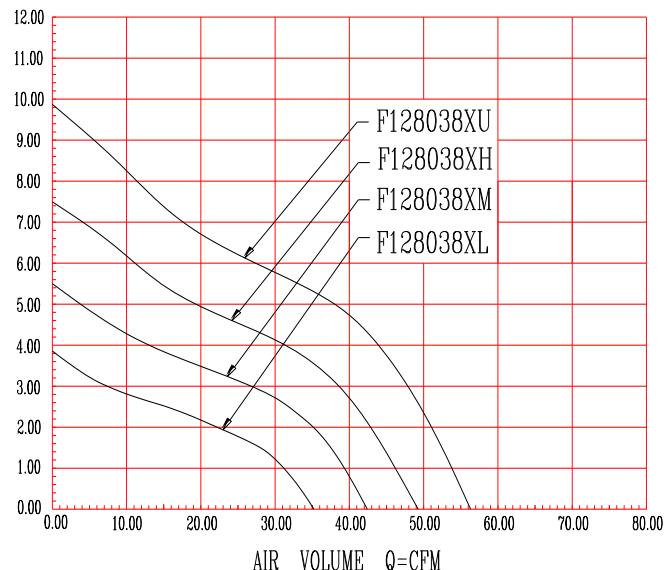

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F128038BL	12	7~13.2	0.18	2.16	3000	35.12	1.00	3.85	36.6
F128038BM	12	7~13.2	0.25	3.00	3600	42.15	1.19	5.55	39.7
F128038BH	12	7~13.2	0.30	3.60	4200	49.18	1.39	7.56	42.5
F128038BU	12	7~13.2	0.50	6.00	4800	56.21	1.59	9.87	45.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×10MM SERIES

Bearing Type:

EBR

Rated Voltage 12v L.M.H.U

Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 24g

	AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES) AIR PRESSURE(mmH ₂ O)								
MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129215×L	12	7~13.2	0.20	2.40	2000	32.45	0.92	1.31	20.4
T129215×M	12	7~13.2	0.25	3.00	2500	42.00	1.19	1.78	25.4
T129215×H	12	7~13.2	0.30	3.60	3000	50.40	1.43	2.56	29.4
T129215×U	12	7~13.2	0.50	6.00	3500	58.80	1.67	3.49	32.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

T129215*H	12	7~13.2	0.30	3.60	3000	47.43	1.34	2.29	31.2
T129215*U	12	7~13.2	0.50	6.00	3500				



EVERFLOW

90×90×10MM SERIES

Bearing Type:

EBR

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 24g

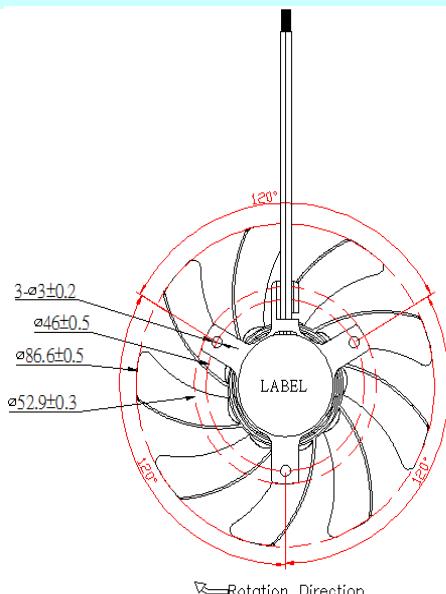

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

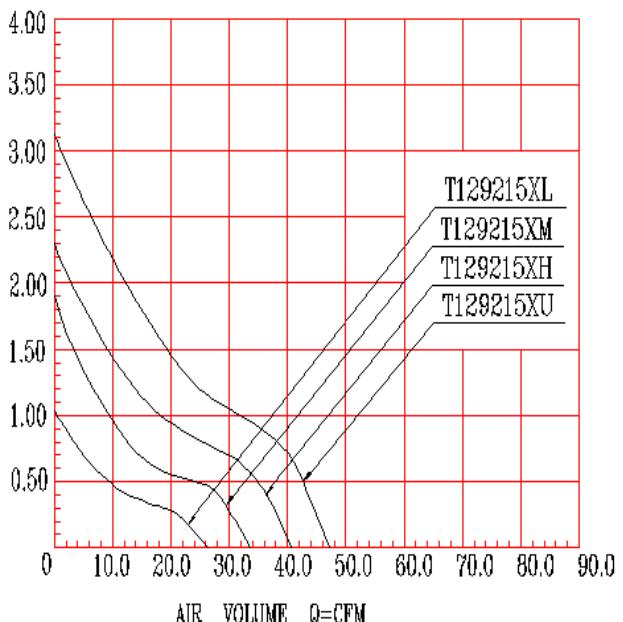

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129215×L	12	7~13.2	0.20	2.40	2000	27.05	0.77	1.02	22.4
T129215×M	12	7~13.2	0.25	3.00	2500	33.81	0.96	1.59	27.3
T129215×H	12	7~13.2	0.30	3.60	3000	40.58	1.15	2.29	31.3
T129215×U	12	7~13.2	0.50	6.00	3500	47.34	1.34	3.12	34.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×15MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 33g

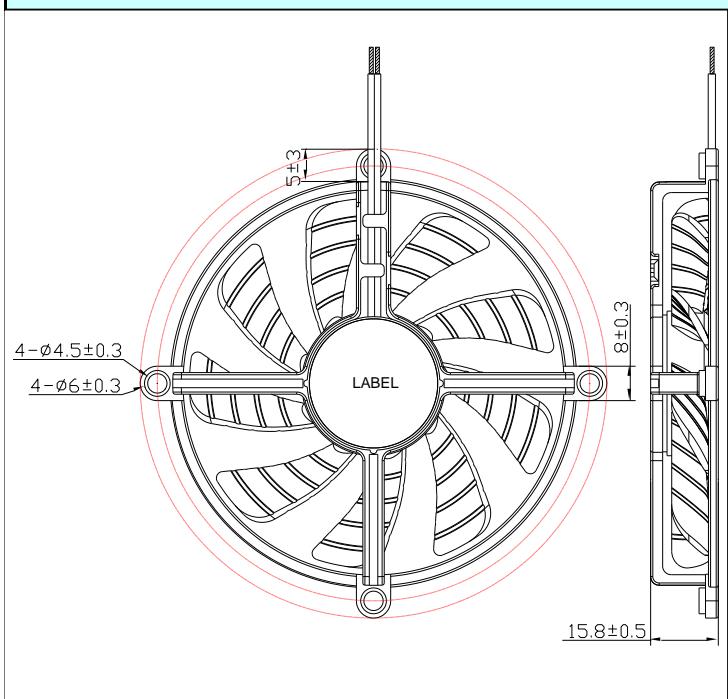

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

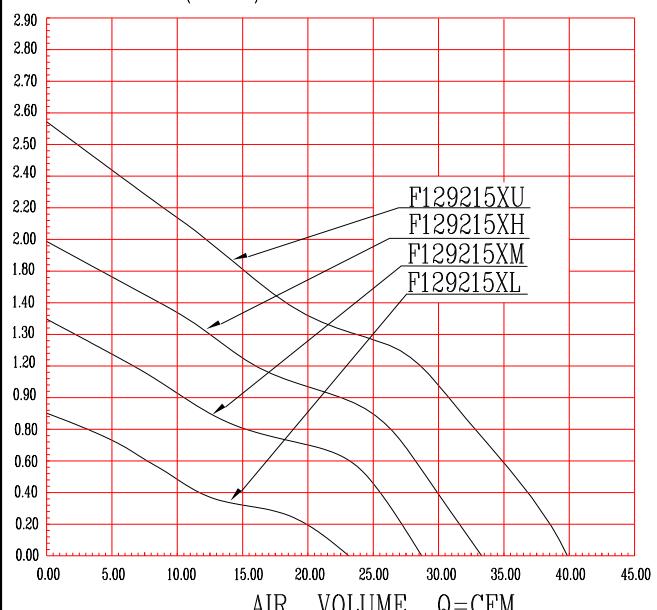

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129215BL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
F129215BM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
F129215BH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
F129215BU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35
F129215SL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
F129215SM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
F129215SH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
F129215SU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

90×90×15MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 32g

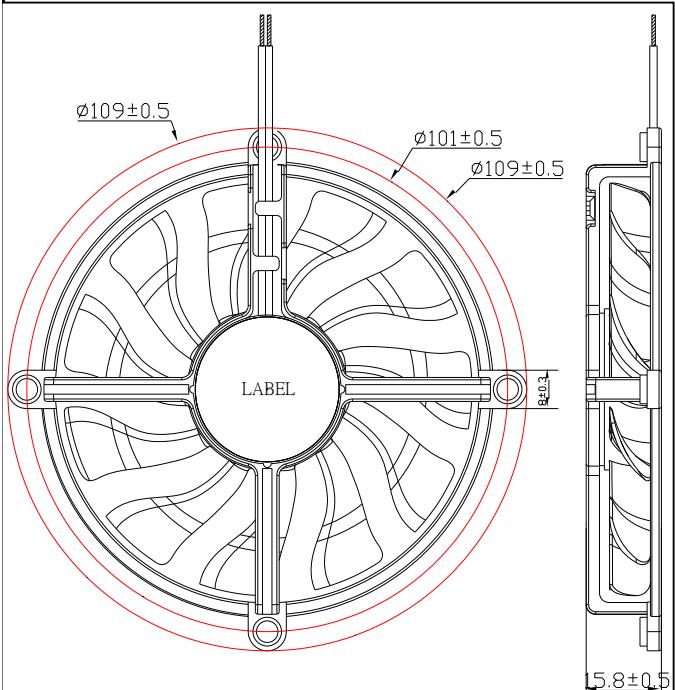

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

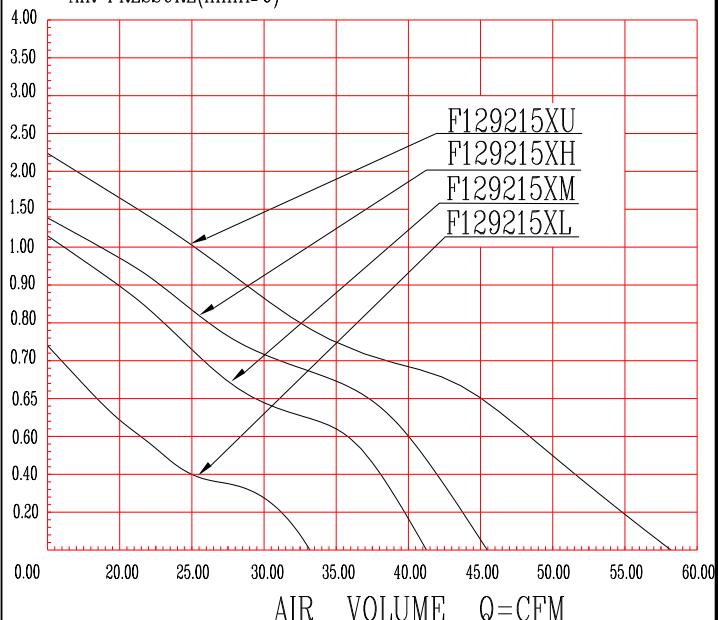

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129215BL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29.5
F129215BM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
F129215BH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	36.2
F129215BU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	40.5
F129215SL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29.5
F129215SM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
F129215SH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	36.2
F129215SU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	40.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

EVERFLOW

90×90×15MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 32g

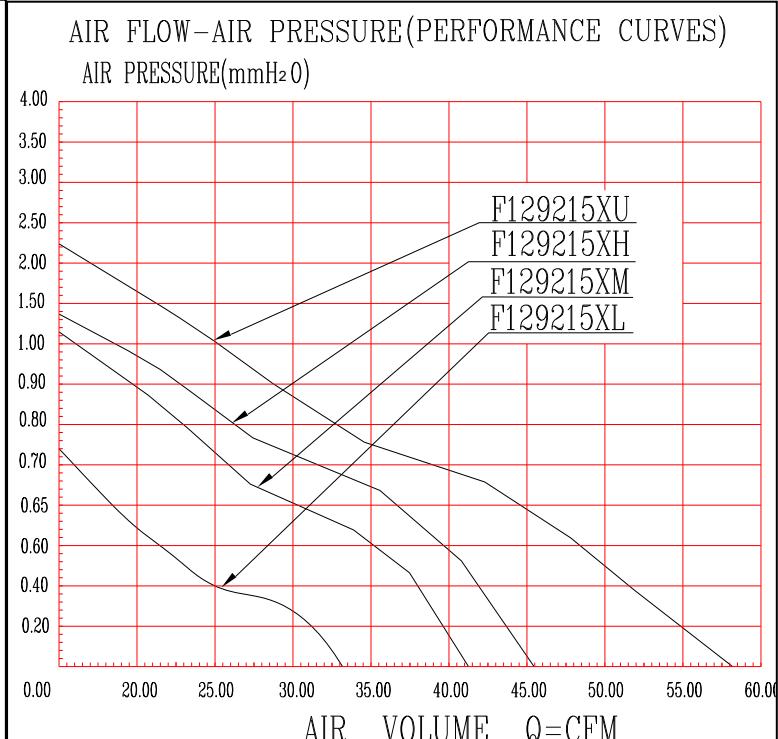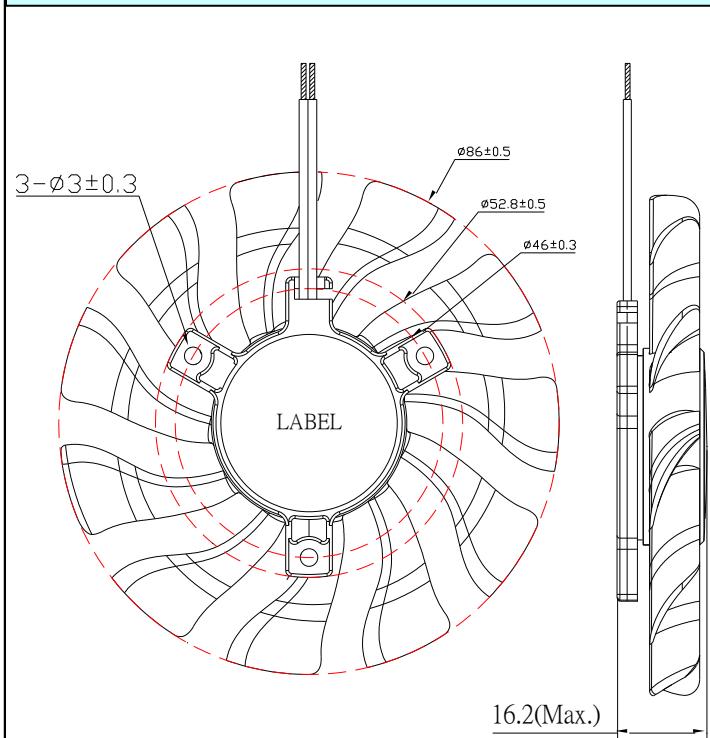

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129215BL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29
T129215BM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
T129215BH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	33
T129215BU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	38
T129215SL	12	7~13.2	0.20	2.40	2000	33.27	0.94	0.74	29
T129215SM	12	7~13.2	0.25	3.00	2500	41.59	1.18	1.15	31.2
T129215SH	12	7~13.2	0.30	3.60	3000	45.47	1.29	1.38	33
T129215SU	12	7~13.2	0.50	6.00	3500	58.23	1.65	2.25	38

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

90×90×15MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 32g

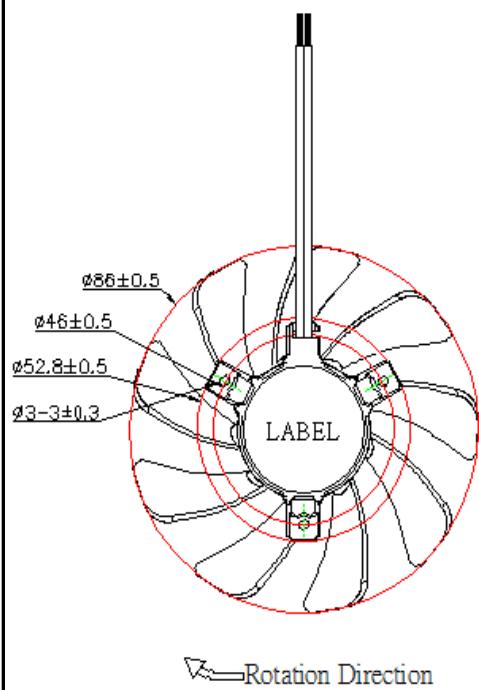

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

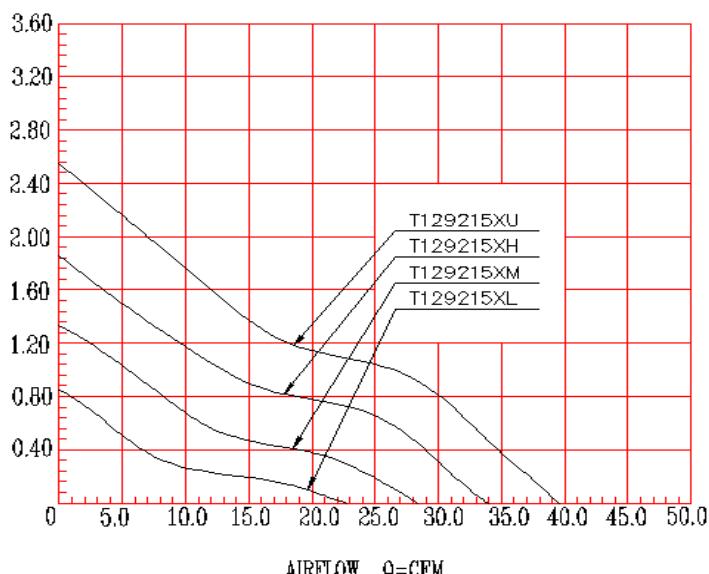

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129215BL	12	7~13.2	0.20	2.40	2000	22.64	0.64	0.84	23.4
T129215BM	12	7~13.2	0.25	3.00	2500	28.30	0.80	1.31	28.3
T129215BH	12	7~13.2	0.30	3.60	3000	33.96	0.96	1.89	32.3
T129215BU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35.6
T129215SL	12	7~13.2	0.20	2.40	2000	22.64	0.64	0.84	23.4
T129215SM	12	7~13.2	0.25	3.00	2500	39.62	1.12	2.57	35.6
T129215SH	12	7~13.2	0.30	3.60	3000	28.30	0.80	1.31	28.3
T129215SU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×15MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12v L.M.H.U



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 29g

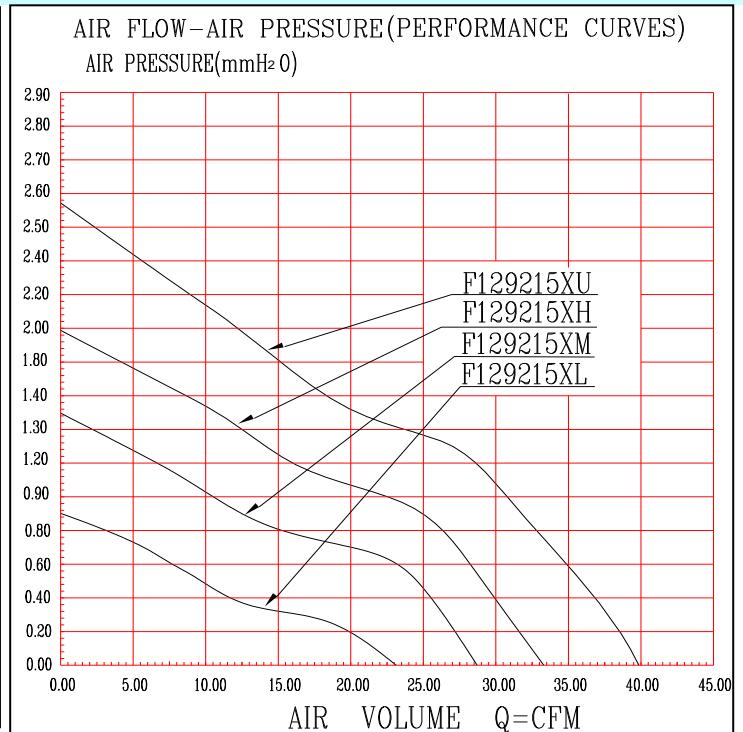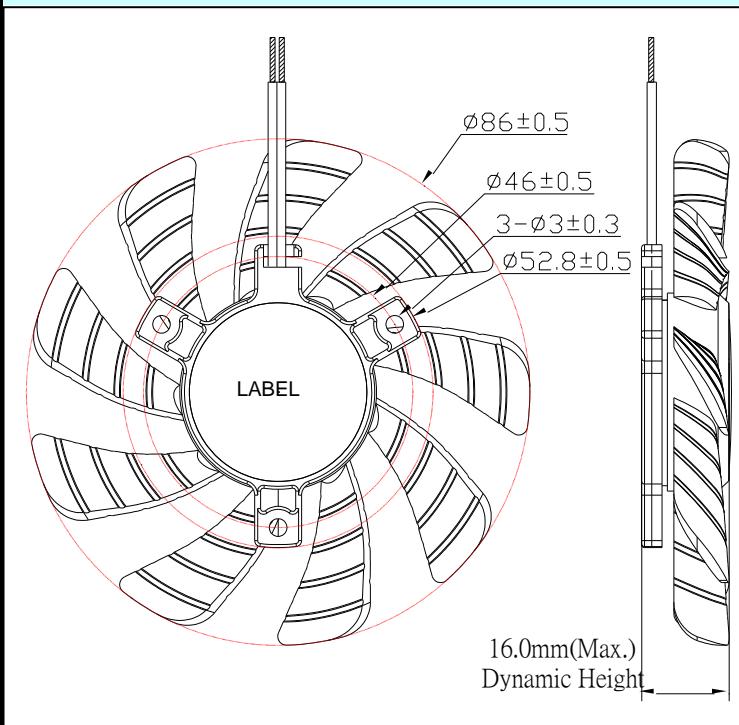

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129215BL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
T129215BM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
T129215BH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
T129215BU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35
T129215SL	12	7~13.2	0.20	2.40	2000	23.05	0.65	0.85	23
T129215SM	12	7~13.2	0.25	3.00	2500	28.67	0.81	1.34	26
T129215SH	12	7~13.2	0.30	3.60	3000	33.89	0.96	1.98	31
T129215SU	12	7~13.2	0.50	6.00	3500	39.62	1.12	2.57	35

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 103g

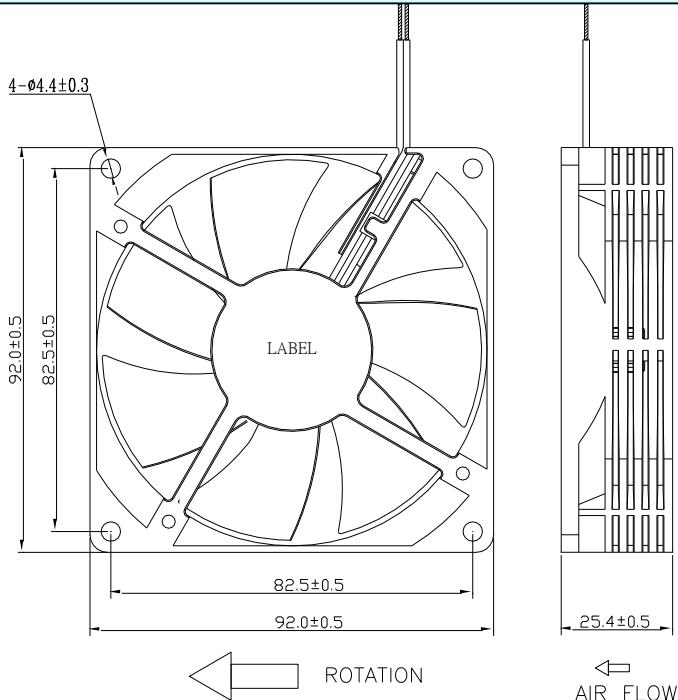

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

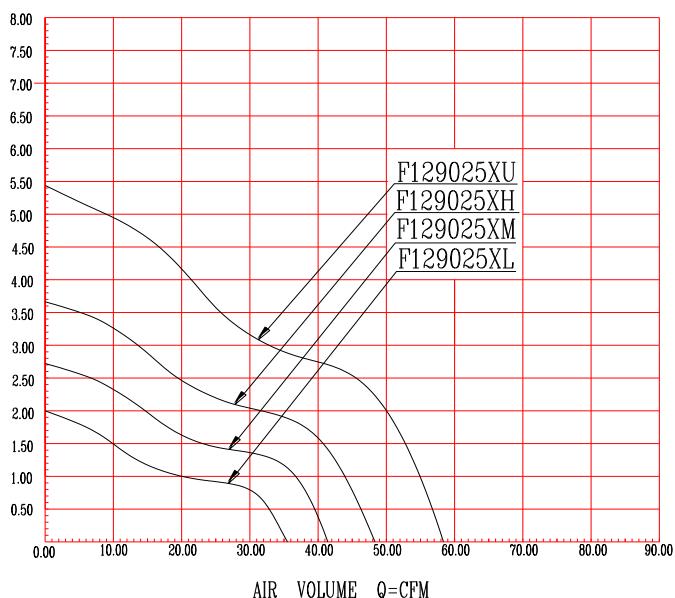

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	35.53	1.01	2.00	27
F129025BM	12	7~13.2	0.18	2.16	2450	41.45	1.17	2.73	30.1
F129025BH	12	7~13.2	0.24	2.88	2850	48.22	1.37	3.69	35
F129025BU	12	7~13.2	0.38	4.56	3450	58.37	1.65	5.41	41.5
F129025SL	12	7~13.2	0.12	1.44	2100	35.53	1.01	2.00	27
F129025SM	12	7~13.2	0.18	2.16	2450	41.45	1.17	2.73	30.1
F129025SH	12	7~13.2	0.25	3.00	2850	48.22	1.37	3.69	35
F129025SU	12	7~13.2	0.38	4.56	3450	58.37	1.65	5.41	41.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

90×90×25MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 113g

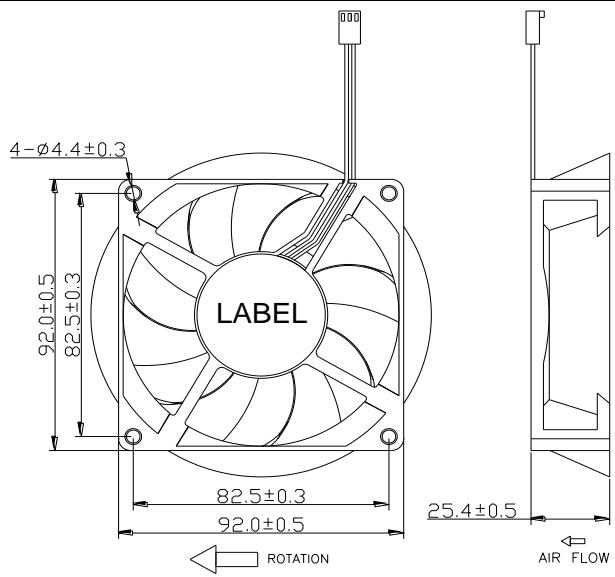

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

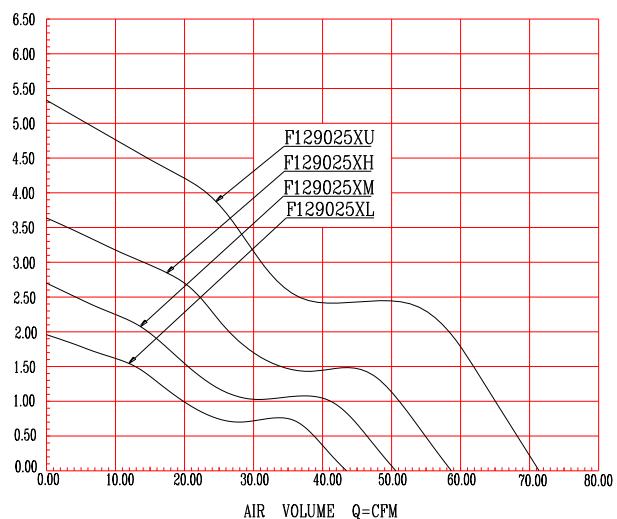

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	43.44	1.23	1.98	27
F129025BM	12	7~13.2	0.18	2.16	2450	50.68	1.44	2.70	31.1
F129025BH	12	7~13.2	0.24	2.88	2850	58.95	1.67	3.65	37.1
F129025BU	12	7~13.2	0.38	4.56	3450	71.36	2.02	5.35	41.6

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

EVERFLOW

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 103g

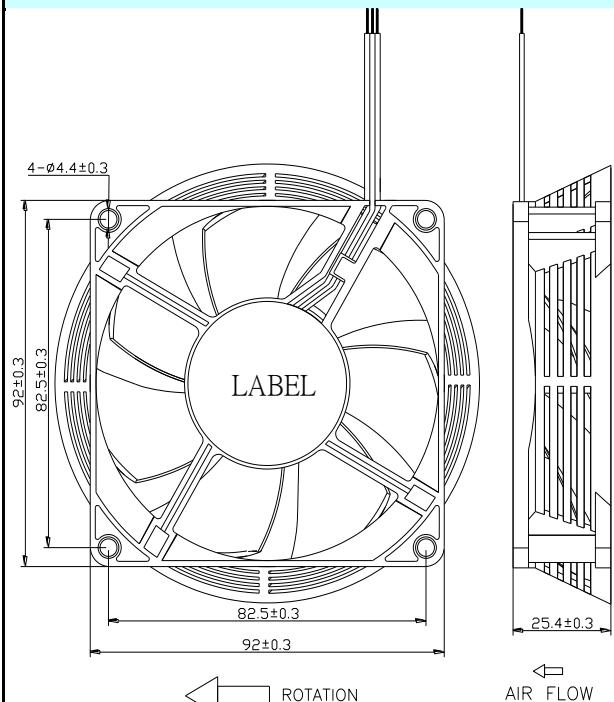

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

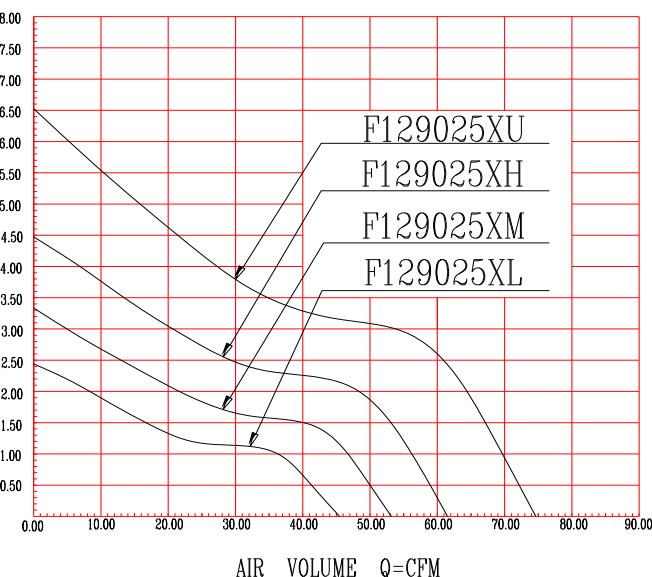

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	45.45	1.29	2.43	28
F129025BM	12	7~13.2	0.18	2.16	2450	53.02	1.50	3.31	30.7
F129025BH	12	7~13.2	0.24	2.88	2850	61.68	1.75	4.48	36.5
F129025BU	12	7~13.2	0.38	4.56	3450	74.66	2.12	6.57	40
F129025SL	12	7~13.2	0.12	1.44	2100	45.45	1.29	2.43	28
F129025SM	12	7~13.2	0.18	2.16	2450	53.02	1.50	3.31	30.7
F129025SH	12	7~13.2	0.25	3.00	2850	61.68	1.75	4.48	36.5
F129025SU	12	7~13.2	0.38	4.56	3450	74.66	2.12	6.57	40

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 108g

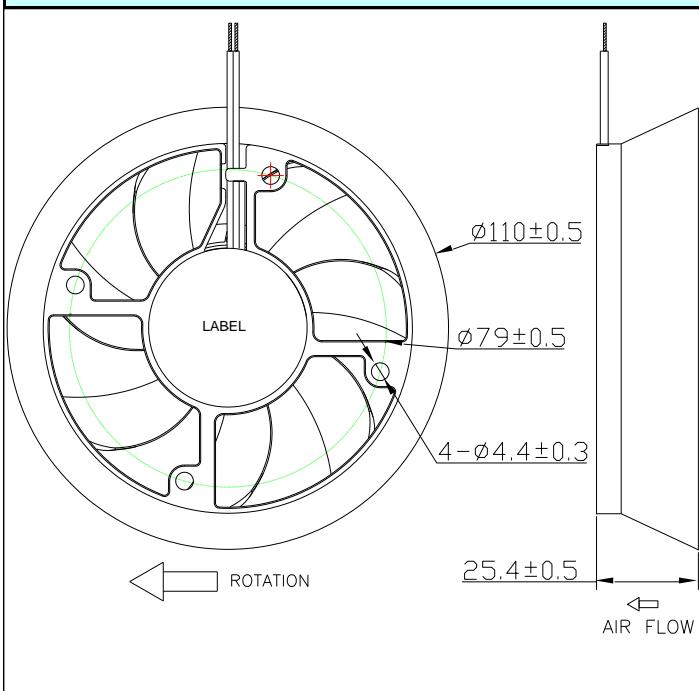

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

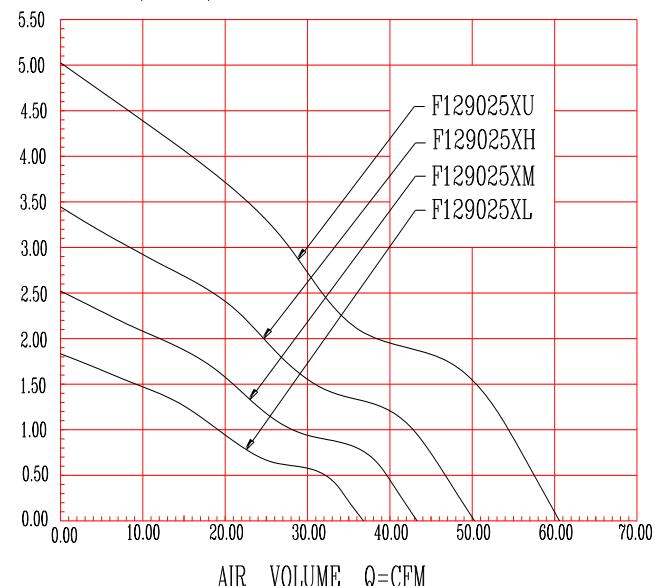

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	36.95	1.05	1.88	34.8
F129025BM	12	7~13.2	0.18	2.16	2450	43.11	1.22	2.56	37.5
F129025BH	12	7~13.2	0.24	2.88	2850	50.14	1.42	3.47	40.1
F129025BU	12	7~13.2	0.38	4.56	3450	60.70	1.72	5.08	43.5
F129025SL	12	7~13.2	0.13	1.56	2100	36.95	1.05	1.88	34.8
F129025SM	12	7~13.2	0.18	2.16	2450	43.11	1.22	2.56	37.5
F129025SH	12	7~13.2	0.24	2.88	2850	50.14	1.42	3.47	40.1
F129025SU	12	7~13.2	0.38	4.56	3450	60.70	1.72	5.08	43.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 103g

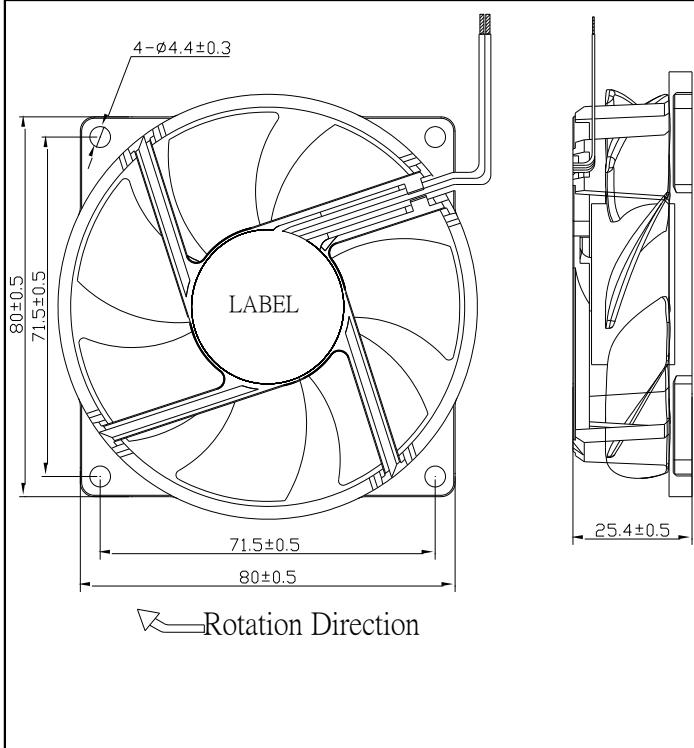

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

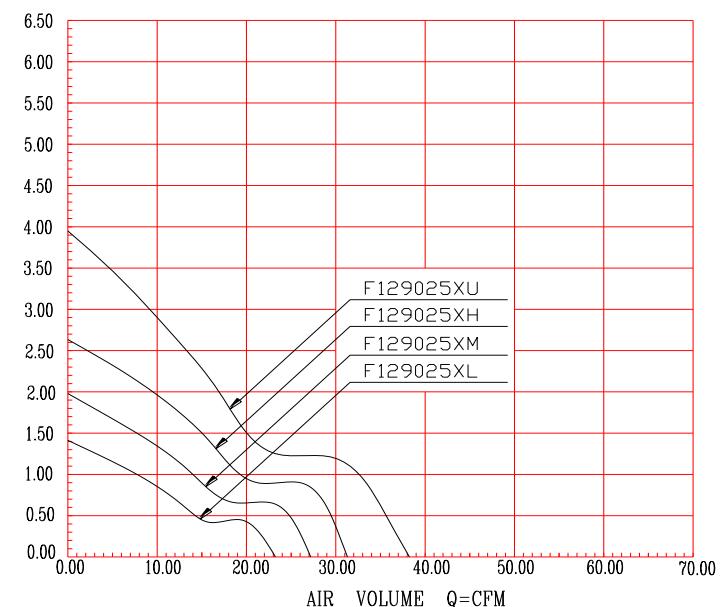

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	23.29	0.66	1.45	23.2
F129025BM	12	7~13.2	0.18	2.16	2450	27.17	0.77	1.98	26.7
F129025BH	12	7~13.2	0.24	2.88	2850	31.61	0.90	2.68	31.6
F129025BU	12	7~13.2	0.38	4.56	3450	38.26	1.08	3.93	36.5
F129025SL	12	7~13.2	0.12	1.44	2100	23.29	0.66	1.45	23.2
F129025SM	12	7~13.2	0.18	2.16	2450	27.17	0.77	1.98	26.7
F129025SH	12	7~13.2	0.25	3.00	2850	31.61	0.90	2.68	31.6
F129025SU	12	7~13.2	0.38	4.56	3450	38.26	1.08	3.93	36.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 103g

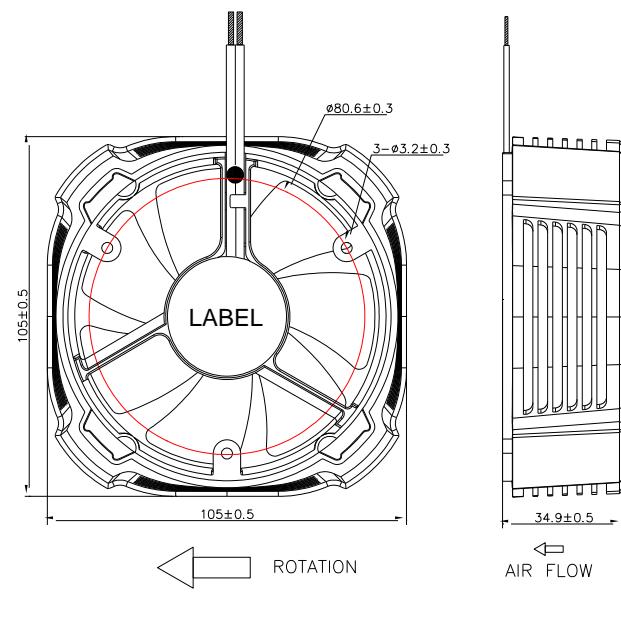

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

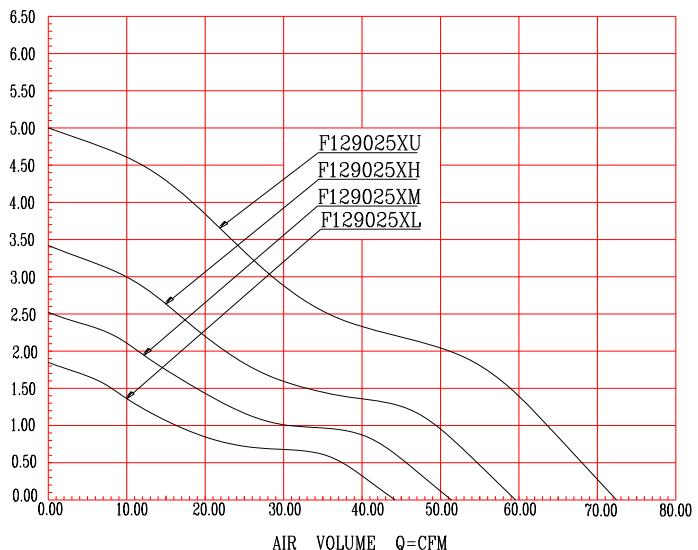

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	44.11	1.25	1.85	35.1
F129025BM	12	7~13.2	0.18	2.16	2450	51.46	1.46	2.52	39.7
F129025BH	12	7~13.2	0.24	2.88	2850	59.87	1.70	3.41	44.8
F129025BU	12	7~13.2	0.38	4.56	3450	72.47	2.05	5.00	49
F129025SL	12	7~13.2	0.12	1.44	2100	44.11	1.25	1.85	35.1
F129025SM	12	7~13.2	0.18	2.16	2450	51.46	1.46	2.52	39.7
F129025SH	12	7~13.2	0.25	3.00	2850	59.87	1.70	3.41	44.8
F129025SU	12	7~13.2	0.38	4.56	3450	72.47	2.05	5.00	49

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 103g

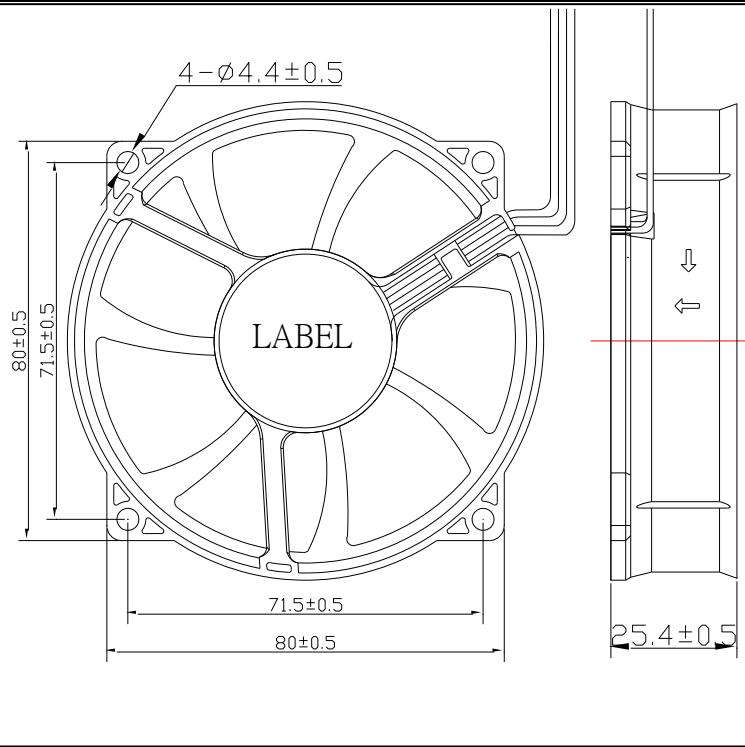

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

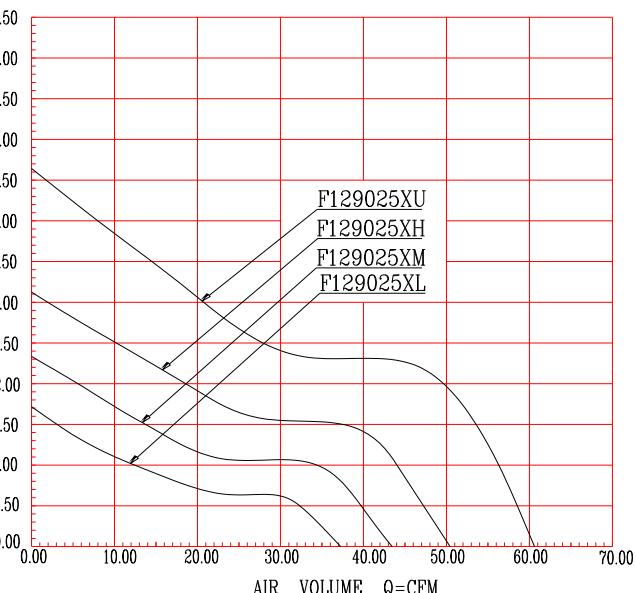

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	37.36	1.06	1.72	26
F129025BM	12	7~13.2	0.18	2.16	2450	43.59	1.23	2.34	30.5
F129025BH	12	7~13.2	0.24	2.88	2850	50.71	1.44	3.17	34.5
F129025BU	12	7~13.2	0.38	4.56	3450	61.38	1.74	4.64	39.9
F129025SL	12	7~13.2	0.12	1.44	2100	37.36	1.06	1.72	26
F129025SM	12	7~13.2	0.18	2.16	2450	43.59	1.23	2.34	30.5
F129025SH	12	7~13.2	0.25	3.00	2850	50.71	1.44	3.17	34.5
F129025SU	12	7~13.2	0.38	4.56	3450	61.38	1.74	4.64	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 103g

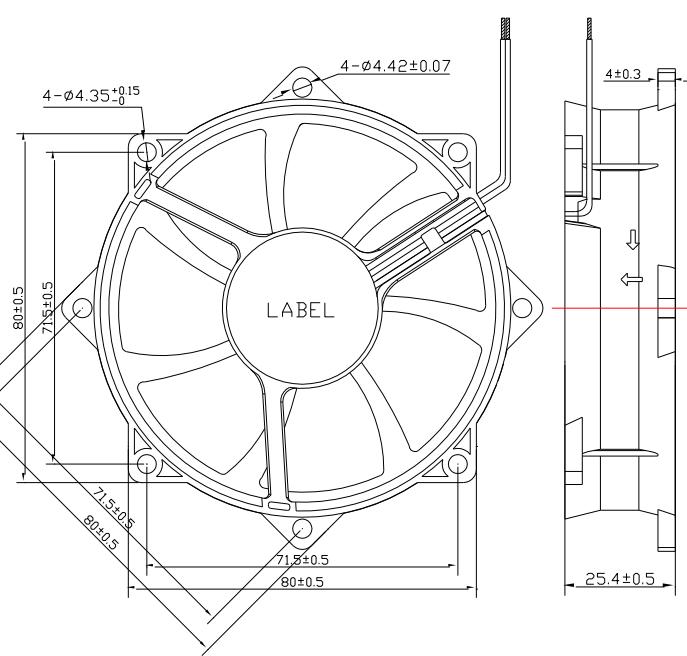

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

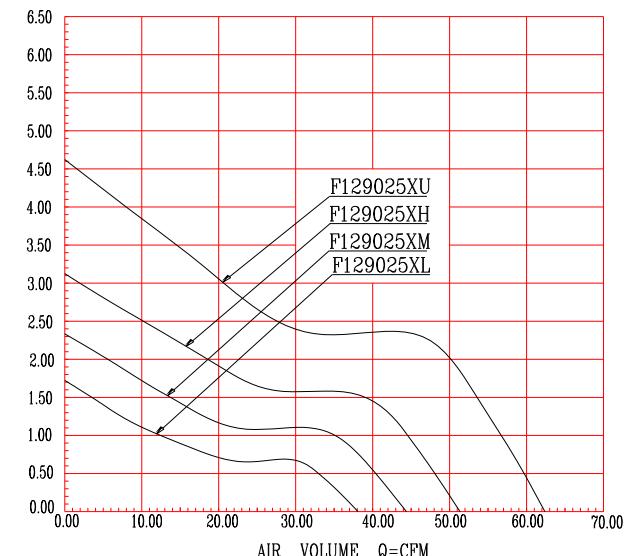

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	38.03	1.08	1.71	26
F129025BM	12	7~13.2	0.18	2.16	2450	44.37	1.26	2.33	30.5
F129025BH	12	7~13.2	0.24	2.88	2850	51.61	1.46	3.15	34.5
F129025BU	12	7~13.2	0.38	4.56	3450	62.47	1.77	4.62	39.9
F129025SL	12	7~13.2	0.12	1.44	2100	38.03	1.08	1.71	26
F129025SM	12	7~13.2	0.18	2.16	2450	44.37	1.26	2.33	30.5
F129025SH	12	7~13.2	0.25	3.00	2850	51.61	1.46	3.15	34.5
F129025SU	12	7~13.2	0.38	4.56	3450	62.47	1.77	4.62	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 103g

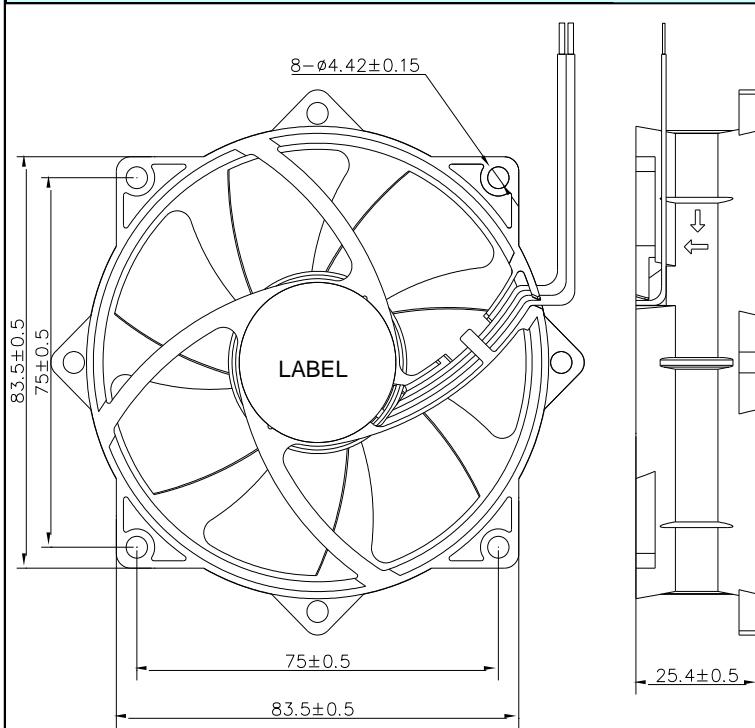

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

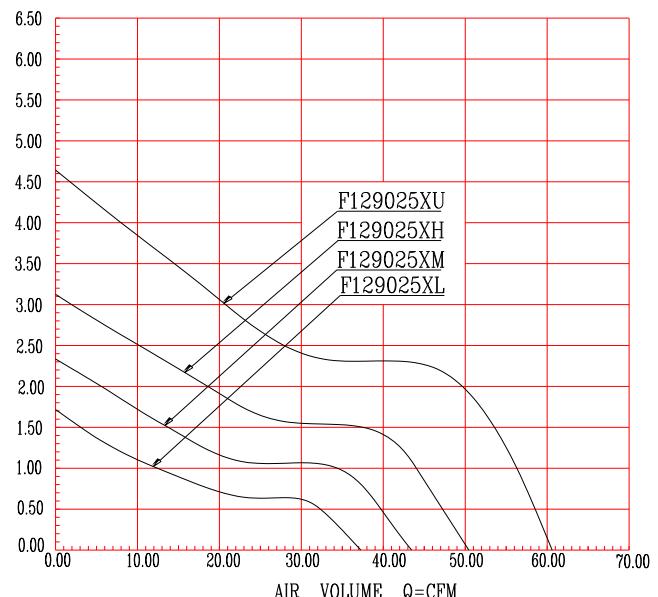

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	37.36	1.06	1.72	26
F129025BM	12	7~13.2	0.18	2.16	2450	43.59	1.23	2.34	30.5
F129025BH	12	7~13.2	0.24	2.88	2850	50.71	1.44	3.17	34.5
F129025BU	12	7~13.2	0.38	4.56	3450	61.38	1.74	4.64	39.9
F129025SL	12	7~13.2	0.12	1.44	2100	37.36	1.06	1.72	26
F129025SM	12	7~13.2	0.18	2.16	2450	43.59	1.23	2.34	30.5
F129025SH	12	7~13.2	0.25	3.00	2850	50.71	1.44	3.17	34.5
F129025SU	12	7~13.2	0.38	4.56	3450	61.38	1.74	4.64	39.9

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

90×90×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 103g

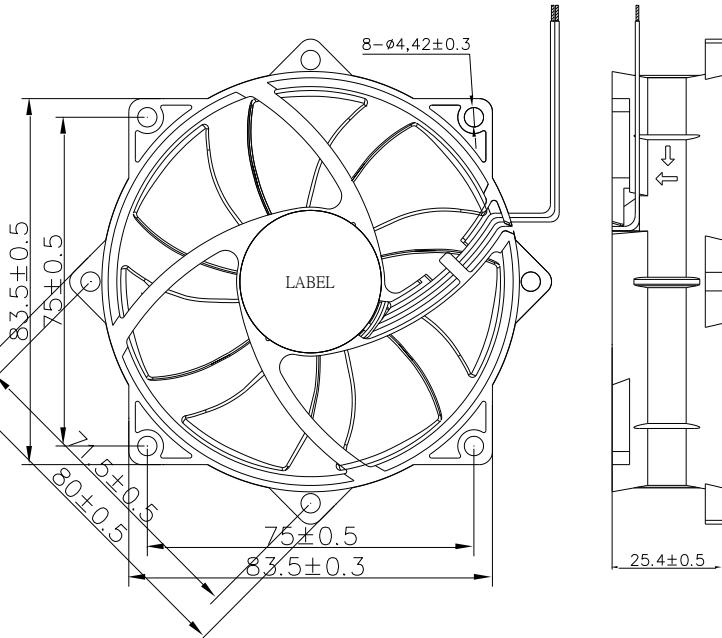

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

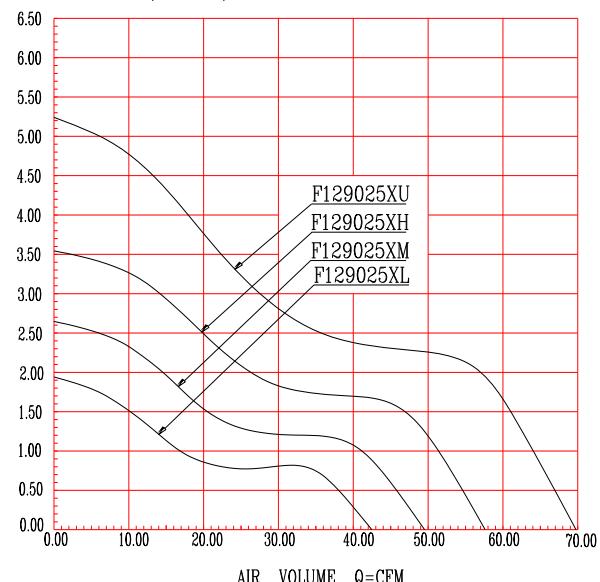

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	42.59	1.21	1.95	26.8
F129025BM	12	7~13.2	0.18	2.16	2450	49.68	1.41	2.65	31.1
F129025BH	12	7~13.2	0.24	2.88	2850	57.80	1.63	3.58	36.5
F129025BU	12	7~13.2	0.38	4.56	3450	69.96	1.98	5.25	42.2
F129025SL	12	7~13.2	0.12	1.44	2100	42.59	1.21	1.95	26.8
F129025SM	12	7~13.2	0.18	2.16	2450	49.68	1.41	2.65	31.1
F129025SH	12	7~13.2	0.25	3.00	2850	57.80	1.63	3.58	36.5
F129025SU	12	7~13.2	0.38	4.56	3450	69.96	1.98	5.25	42.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

90×90×25MM SERIES

Material : Housing Plastic (UL : 94V-0)

Bearing Type: Two ball bearing

EBR


Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 89g

Rated Voltage: 12V/24V/48V

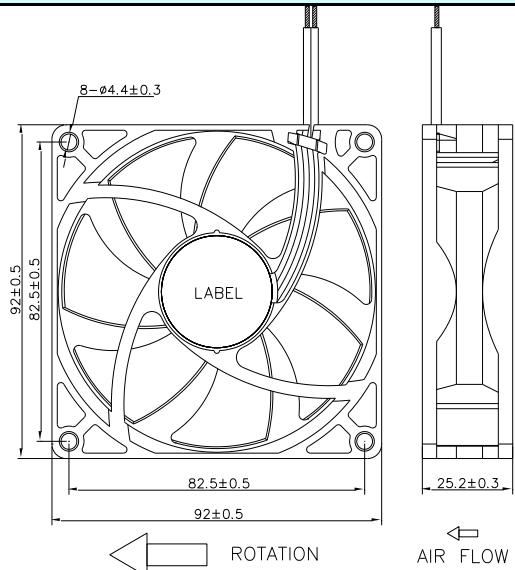

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

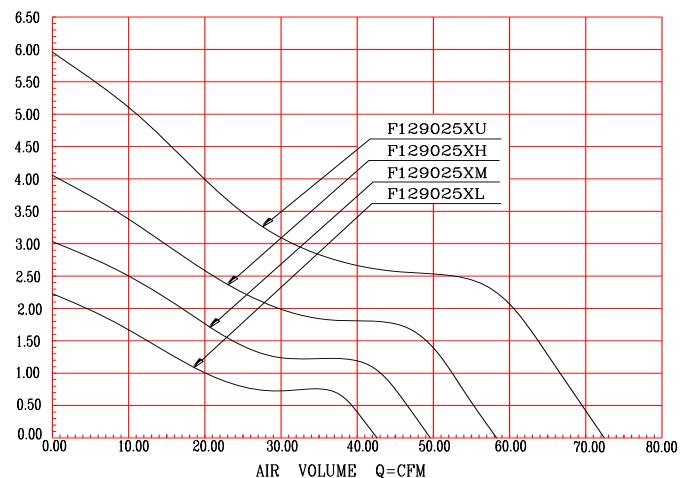

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	42.75	1.21	2.22	26.3
F129025BM	12	7~13.2	0.18	2.16	2450	49.88	1.41	3.02	31.5
F129025BH	12	7~13.2	0.24	2.88	2850	58.02	1.64	4.08	36.0
F129025BU	12	7~13.2	0.38	4.56	3450	70.24	1.99	5.98	40.3
F129025SL	12	7~13.2	0.12	1.44	2100	42.75	1.21	2.22	26.3
F129025SM	12	7~13.2	0.18	2.16	2450	49.88	1.41	3.02	31.5
F129025SH	12	7~13.2	0.25	3.00	2850	58.02	1.64	4.08	36.0
F129025SU	12	7~13.2	0.38	4.56	3450	70.24	1.99	5.98	40.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

90×90×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V/48V

Material : Housing Plastic (UL : 94V-0)


Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C


Weight : 103g

Weight : 103g

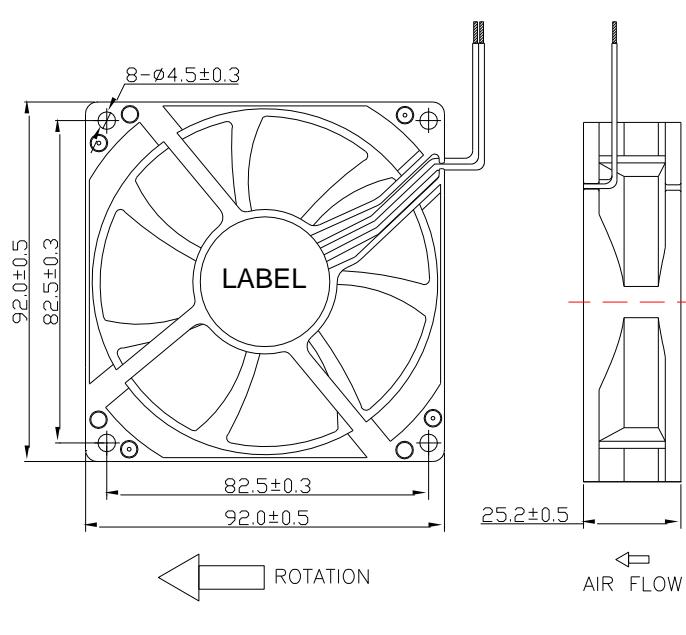

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

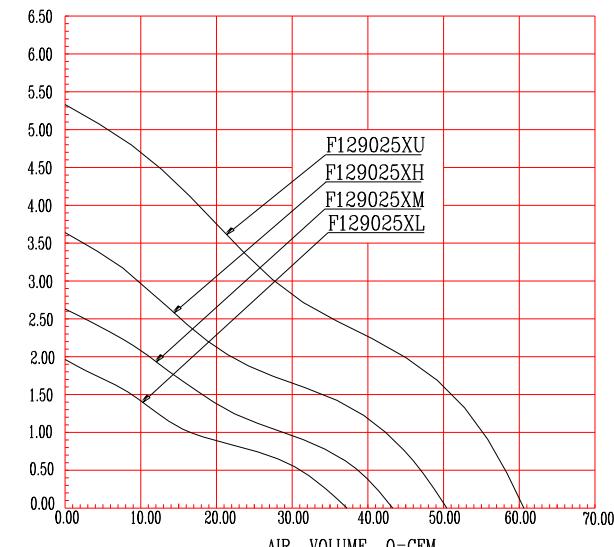

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129025BL	12	7~13.2	0.13	1.56	2100	37.09	1.05	1.97	25.9
F129025BM	12	7~13.2	0.18	2.16	2450	43.27	1.23	2.68	30.2
F129025BH	12	7~13.2	0.24	2.88	2850	50.34	1.43	3.63	34.6
F129025BU	12	7~13.2	0.38	4.56	3450	60.94	1.73	5.32	40.7
F129025SL	12	7~13.2	0.12	1.44	2100	37.09	1.05	1.97	25.9
F129025SM	12	7~13.2	0.18	2.16	2450	43.27	1.23	2.68	30.2
F129025SH	12	7~13.2	0.25	3.00	2850	50.34	1.43	3.63	34.6
F129025SU	12	7~13.2	0.38	4.56	3450	60.94	1.73	5.32	40.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

90×90×32MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 115g

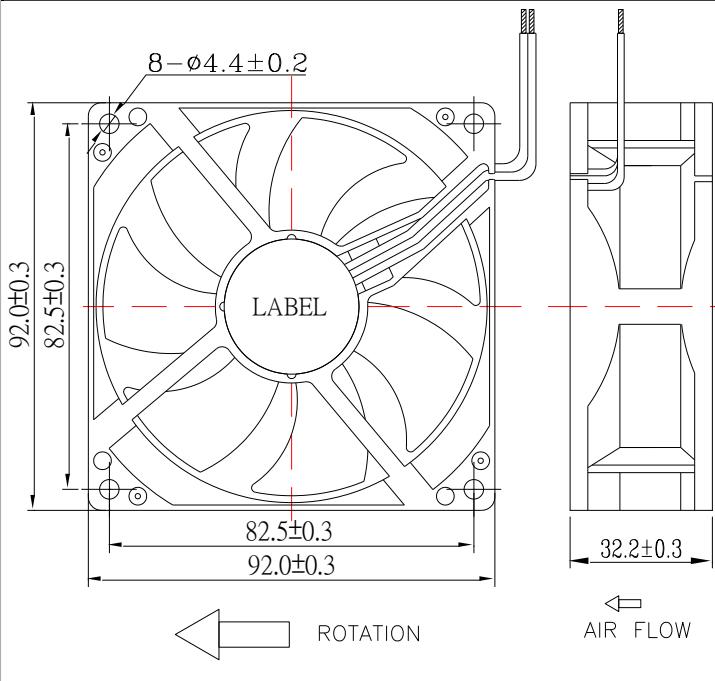

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

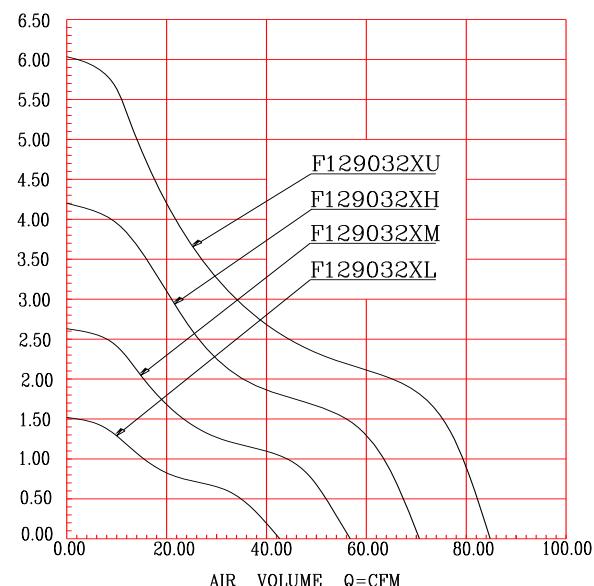

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129032BL	12	7~13.2	0.14	1.68	1800	42.22	1.20	1.51	26.6
F129032BM	12	7~13.2	0.20	2.40	2400	56.29	1.59	2.69	31.2
F129032BH	12	7~13.2	0.48	5.76	3000	70.36	1.99	4.20	37
F129032BU	12	7~13.2	1.00	12.00	3600	84.43	2.39	6.05	41.5
F129032SL	12	7~13.2	0.14	1.68	1800	42.22	1.20	1.51	26.6
F129032SM	12	7~13.2	0.20	2.40	2400	56.29	1.59	2.69	31.2
F129032SH	12	7~13.2	0.48	5.76	3000	70.36	1.99	4.20	37
F129032SU	12	7~13.2	1.00	12.00	3600	84.43	2.39	6.05	41.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

92×92×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 115g

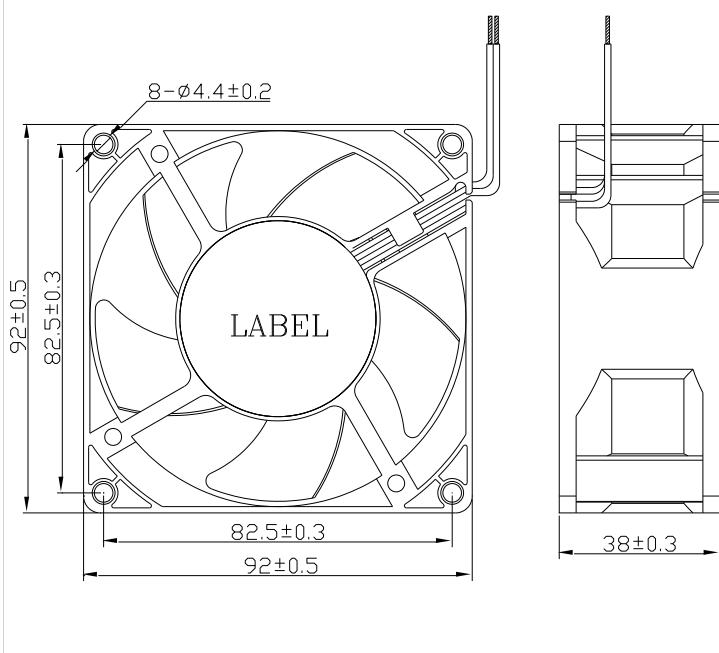

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

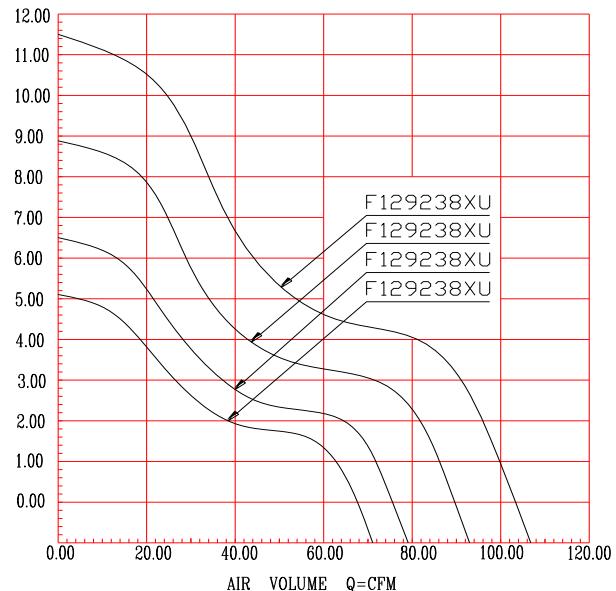

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129238BL	12	7~13.2	0.50	6.00	3200	70.81	2.01	5.14	45.9
F129238BM	12	7~13.2	0.70	8.40	3600	79.66	2.26	6.50	48
F129238BH	12	7~13.2	0.80	9.60	4200	92.93	2.63	8.85	51.2
F129238BU	12	7~13.2	1.20	14.40	4800	106.21	3.01	11.56	54

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

92×92×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 115g

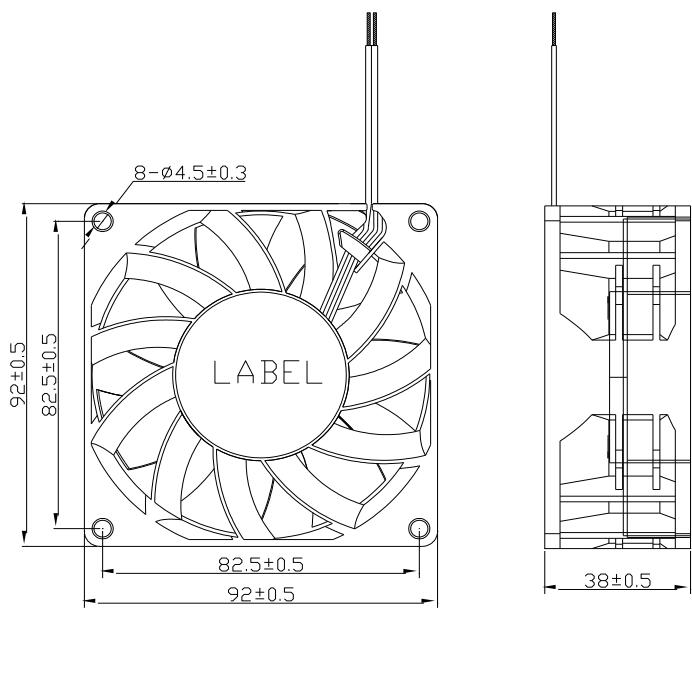

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

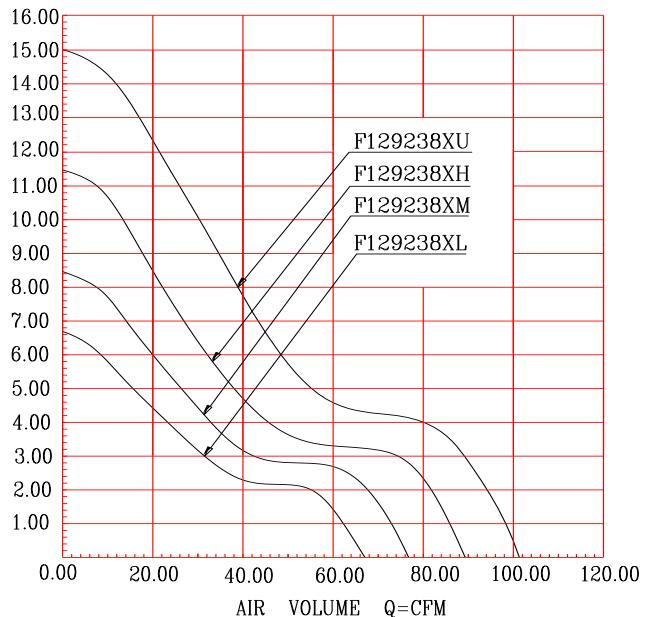

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129238BL	12	7~13.2	0.50	6.00	3200	67.89	1.92	6.67	42.5
F129238BM	12	7~13.2	0.70	8.40	3600	76.37	2.16	8.44	45.5
F129238BH	12	7~13.2	0.80	9.60	4200	89.10	2.52	11.48	50.5
F129238BU	12	7~13.2	1.20	14.40	4800	101.83	2.88	15.00	53.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

92×92×38MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 115g

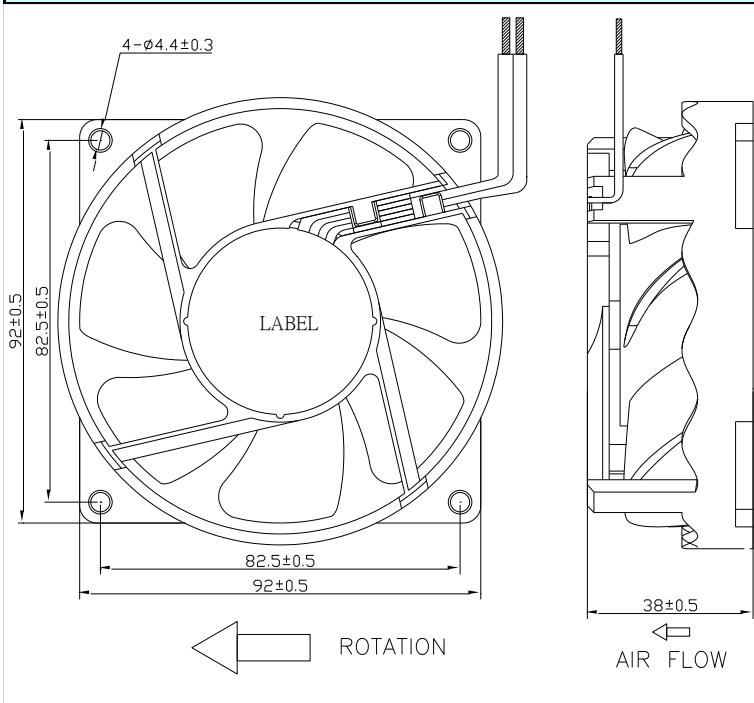

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

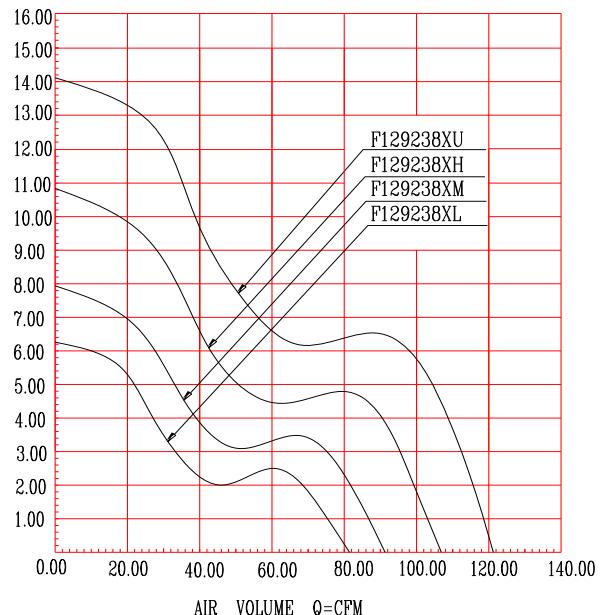

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F129238BL	12	7~13.2	0.50	6.00	3200	81.80	2.32	6.28	43
F129238BM	12	7~13.2	0.70	8.40	3600	91.21	2.58	7.95	47.1
F129238BH	12	7~13.2	0.80	9.60	4200	106.42	3.01	10.82	52.5
F129238BU	12	7~13.2	1.20	14.40	4800	121.62	3.45	14.13	55
F129238SL	12	7~13.2	0.50	6.00	3200	81.80	2.32	6.28	43
F129238SM	12	7~13.2	0.70	8.40	3600	91.21	2.58	7.95	47.1
F129238SH	12	7~13.2	0.80	9.60	4200	106.42	3.01	10.82	52.5
F129238SU	12	7~13.2	1.20	14.40	4800	121.62	3.45	14.13	55

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

97×97×33MM SERIES

Bearing Type: Two ball bearing

Rated Voltage: 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 165g

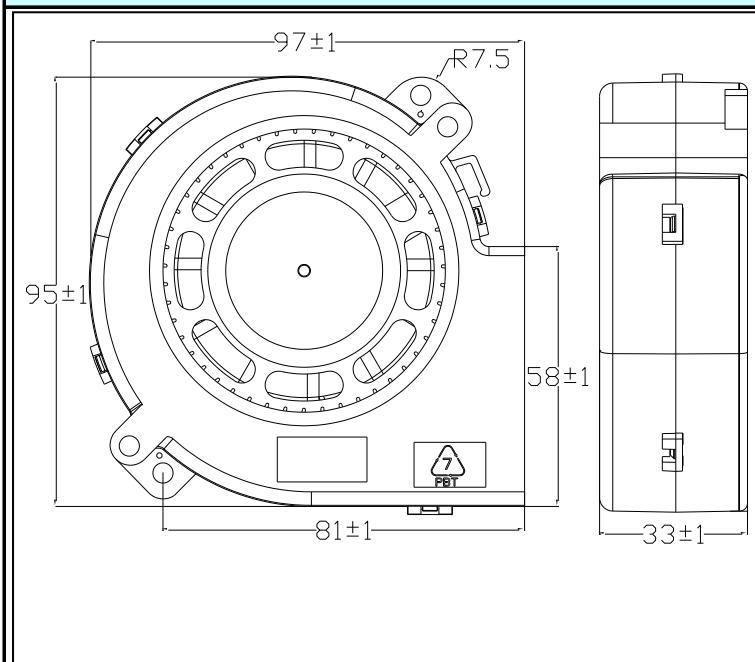

AIR FLOW-AIR PRESSURE PERFORMANCE CURVES
STATIC PRESSURE mm/H₂O

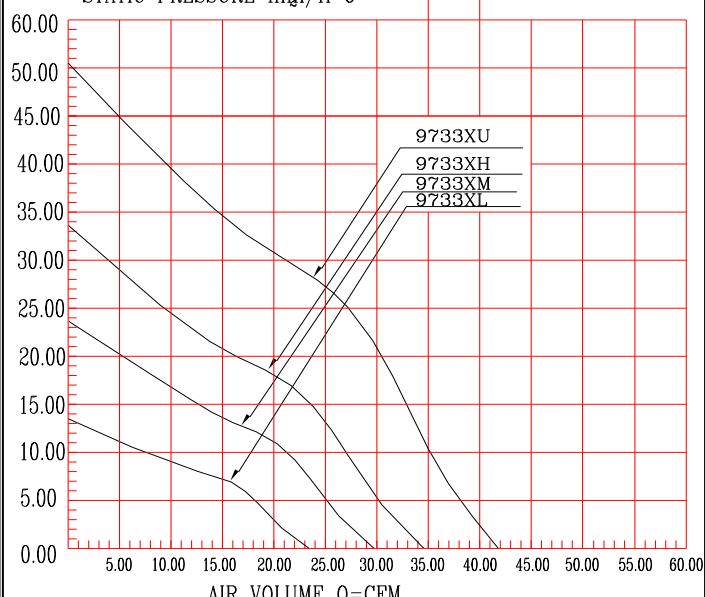

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level (dB(A))
						(CFM)	m ³ /min		
B129733BL	12	7~13.2	0.40	4.80	2600	23.53	0.67	13.57	46.4
B129733BM	12	7~13.2	0.45	5.40	3200	29.28	0.83	23.46	50.5
B129733BH	12	7~13.2	0.80	9.60	3800	34.58	1.01	33.67	55.3
B129733BU	12	7~13.2	1.20	14.40	4600	41.65	1.18	50.47	59.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

100×100×20MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 5V/12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 66g

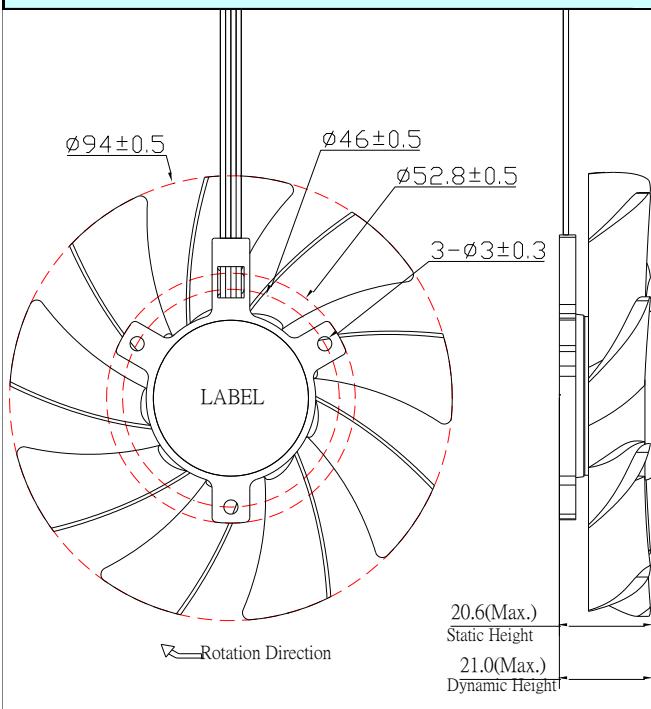

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

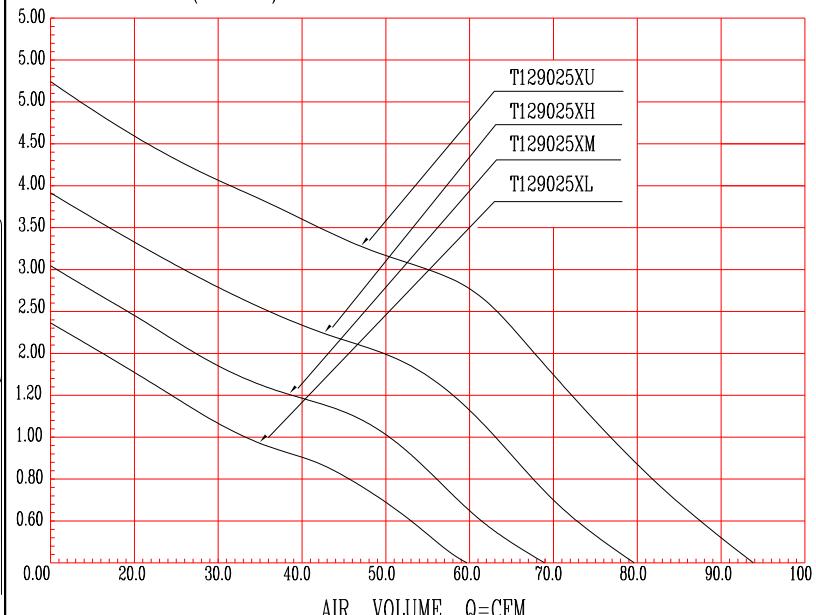

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Maximum Air Flow		Maximum Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T129025BL	12	7~13.2	0.13	1.56	2100	59.56	1.69	2.35	35.7
T129025BM	12	7~13.2	0.18	2.16	2450	68.86	1.95	3.02	38.7
T129025BH	12	7~13.2	0.24	2.88	2850	79.61	2.26	3.91	44.3
T129025BU	12	7~13.2	0.38	4.56	3450	93.94	2.66	5.24	47.2
T129025SL	12	7~13.2	0.12	1.44	2100	59.56	1.69	2.35	35.7
T129025SM	12	7~13.2	0.18	2.16	2450	68.86	1.95	3.02	38.7
T129025SH	12	7~13.2	0.25	3.00	2850	79.61	2.26	3.91	44.3
T129025SU	12	7~13.2	0.38	4.56	3450	93.94	2.66	5.24	47.2

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

120×120×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 147g

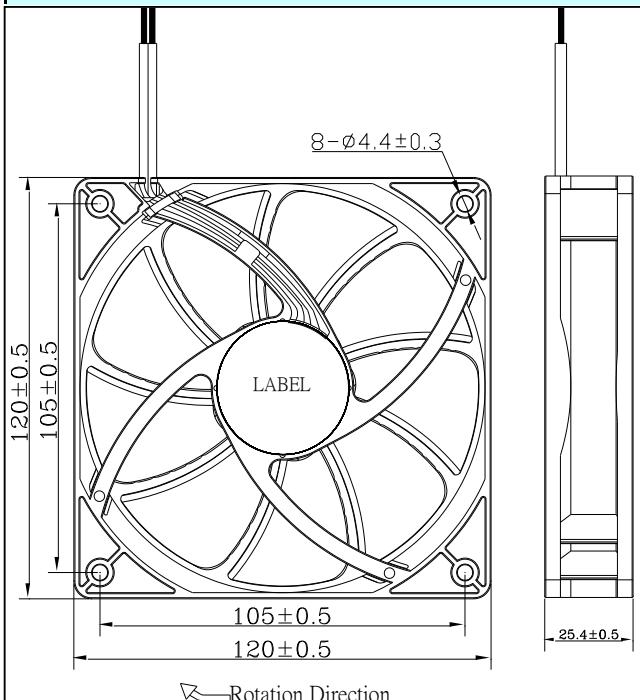

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

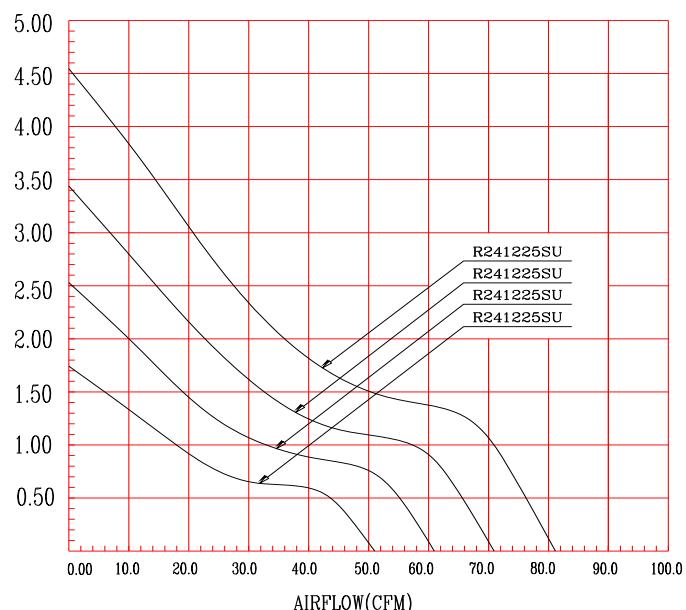

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121225*L	12	7~13.2	0.20	2.40	1500	50.40	1.43	1.76	26.2
F121225*M	12	7~13.2	0.25	3.00	1800	60.48	1.71	2.54	31.2
F121225*H	12	7~13.2	0.32	3.84	2100	70.56	2.00	3.46	36.4
F121225*U	12	7~13.2	0.40	4.80	2400	80.64	2.28	4.52	40.7

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

120×120×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 79g

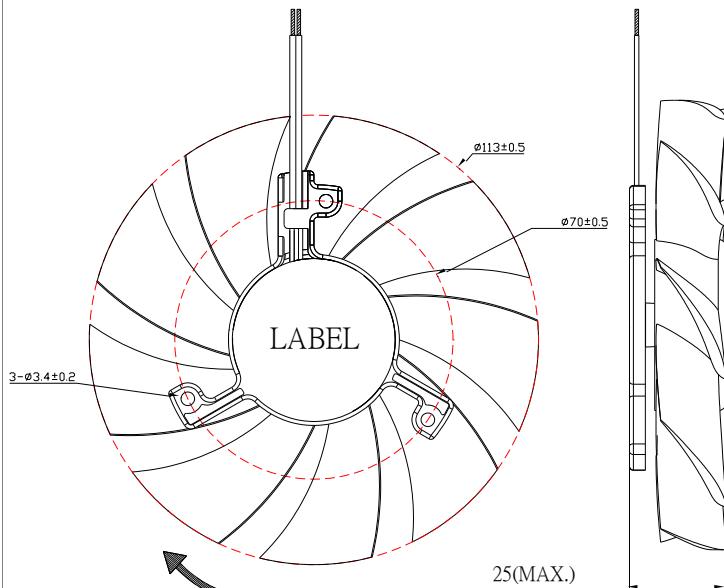

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

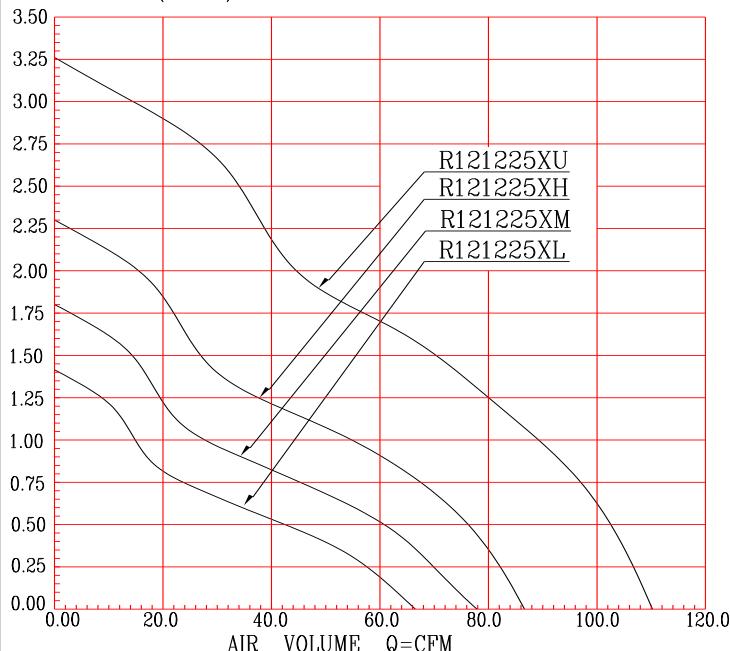

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Maximum Air Flow		Maximum Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
T121225BL	12	7~13.2	0.20	2.40	1500	66.55	1.89	1.42	30.5
T121225BM	12	7~13.2	0.25	3.00	1800	77.85	2.21	1.80	34
T121225BH	12	7~13.2	0.32	3.84	2100	86.59	2.45	2.30	37.5
T121225BU	12	7~13.2	0.40	4.80	2400	110.03	3.12	3.26	39.5
T121225SL	12	7~13.2	0.20	2.40	1500	66.55	1.89	1.42	30.5
T121225SM	12	7~13.2	0.25	3.00	1800	77.85	2.21	1.80	34
T121225SH	12	7~13.2	0.32	3.84	2100	86.59	2.45	2.30	37.5
T121225SU	12	7~13.2	0.40	4.80	2400	110.03	3.12	3.26	39.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

120×120×25MM SERIES

Bearing Type: Two ball bearing
EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 140g

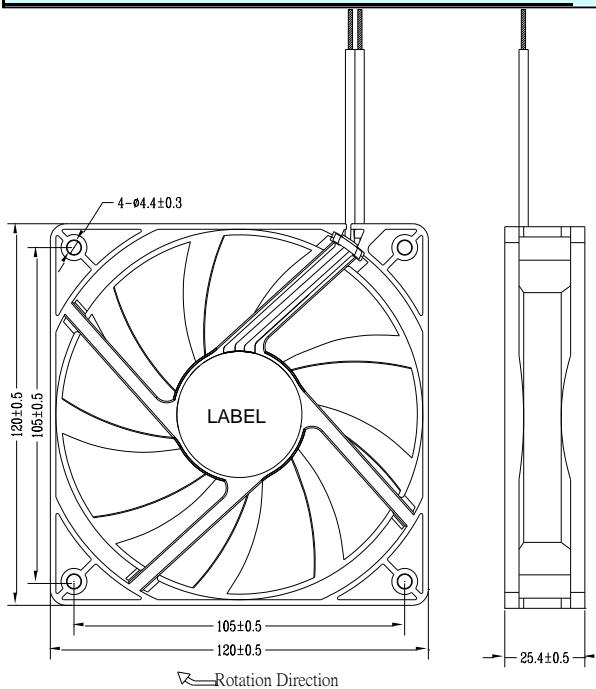

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)
AIR PRESSURE(mmH₂O)

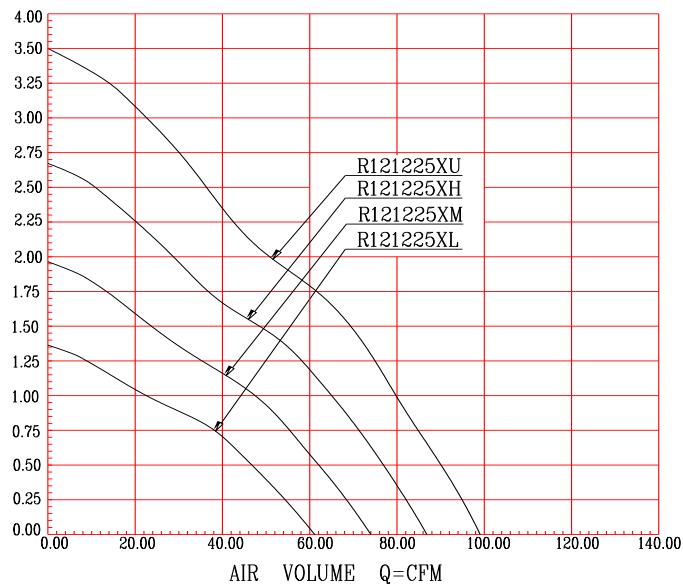

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R121225BL	12	7~13.2	0.20	2.40	1500	61.67	1.75	1.37	30.5
R121225BM	12	7~13.2	0.25	3.00	1800	74.00	2.10	1.97	34
R121225BH	12	7~13.2	0.32	3.84	2100	86.34	2.45	2.68	37.5
R121225BU	12	7~13.2	0.40	4.80	2400	98.67	2.80	3.50	39.5
R121225SL	12	7~13.2	0.20	2.40	1500	61.67	1.75	1.37	30.5
R121225SM	12	7~13.2	0.25	3.00	1800	74.00	2.10	1.97	34
R121225SH	12	7~13.2	0.32	3.84	2100	86.34	2.45	2.68	37.5
R121225SU	12	7~13.2	0.40	4.80	2400	98.67	2.80	3.50	39.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

122×122×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage: 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 140g

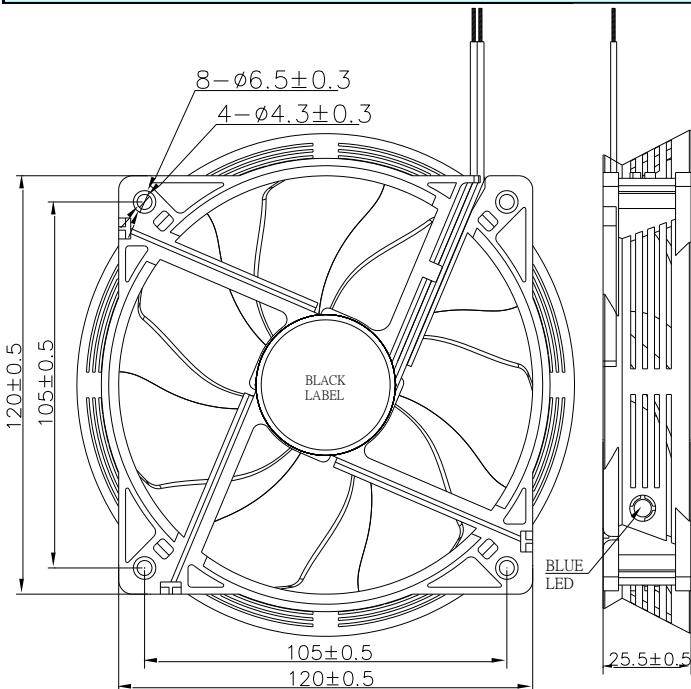

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE mm/H₂O

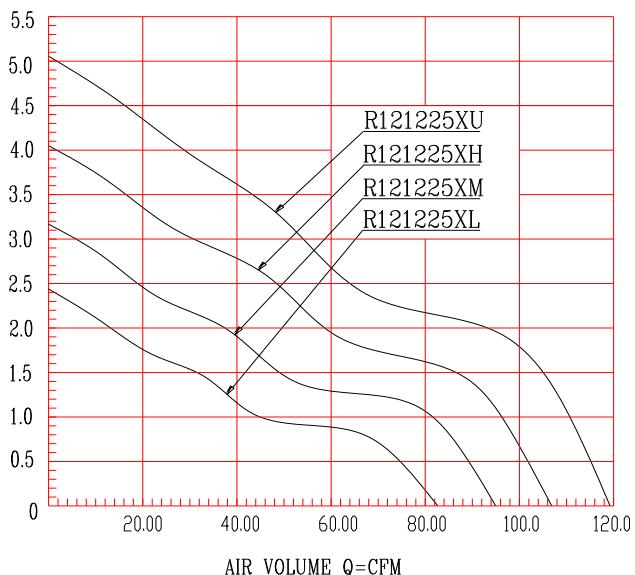

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R121225BL	12	7~13.2	0.20	2.40	2000	82.63	2.34	2.41	40.5
R121225BM	12	7~13.2	0.25	3.00	2300	95.03	2.69	3.18	43
R121225BH	12	7~13.2	0.32	3.84	2600	107.42	3.04	4.07	46.1
R121225BU	12	7~13.2	0.40	4.80	2900	119.81	3.39	5.06	48.5
R121225SL	12	7~13.2	0.20	2.40	2000	82.63	2.34	2.41	40.5
R121225SM	12	7~13.2	0.25	3.00	2300	95.03	2.69	3.18	43
R121225SH	12	7~13.2	0.32	3.84	2600	107.42	3.04	4.07	46.1
R121225SU	12	7~13.2	0.40	4.80	2900	119.81	3.39	5.06	48.5

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

120×120×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V/48V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 276g

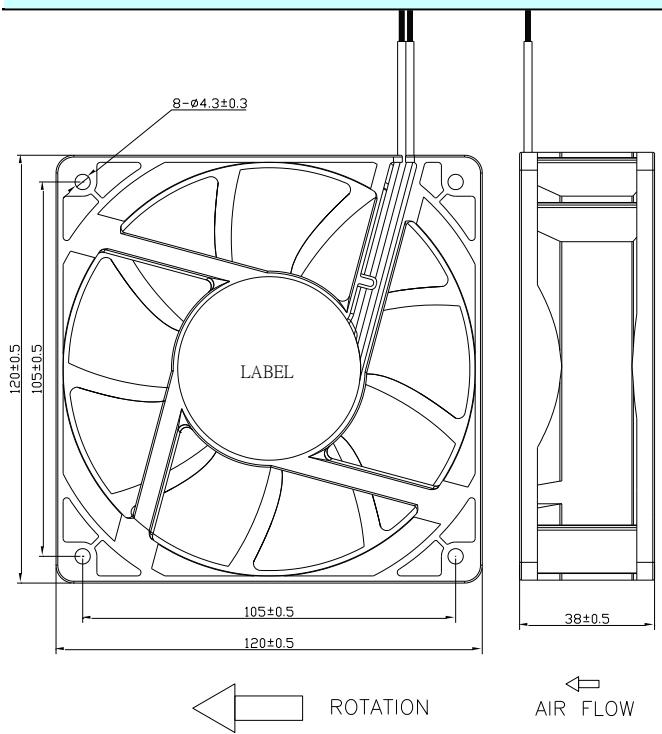

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

STATIC PRESSURE mm/H₂O

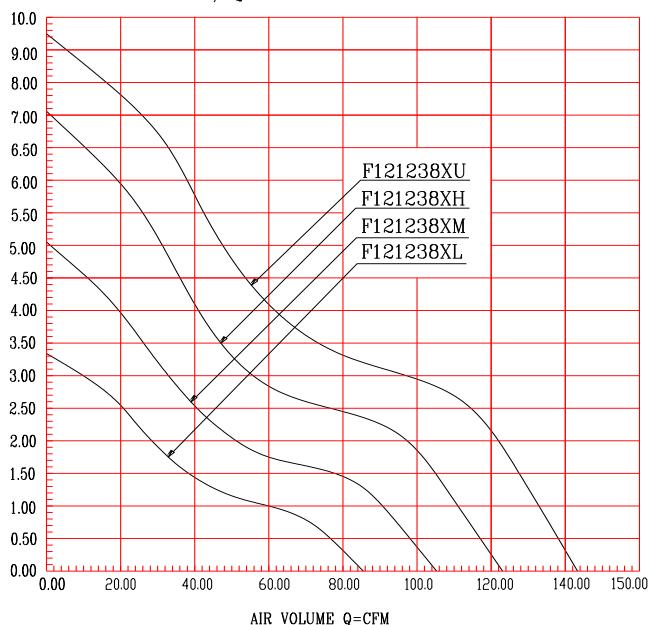

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121238BL	12	7~13.2	0.25	3.00	1800	85.71	2.43	3.41	30
F121238BM	12	7~13.2	0.50	6.00	2200	104.76	2.97	5.09	36.4
F121238BH	12	7~13.2	0.65	7.80	2600	123.80	3.51	7.11	43.1
F121238BU	12	7~13.2	1.00	12.00	3000	142.85	4.05	9.47	46.5
F241238BL	24	N/A	0.20	4.80	1800	84.70	2.40	3.43	32.7
F241238BU	24	N/A	1.2	28.80	3500	168.58	4.78	12.40	51.7
F481238BL	48	N/A	0.2	9.60	1800	85.09	2.41	3.44	33.2
F481238BU	48	N/A	0.8	38.40	3700	180.57	5.12	13.90	53

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

120×120×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 325g

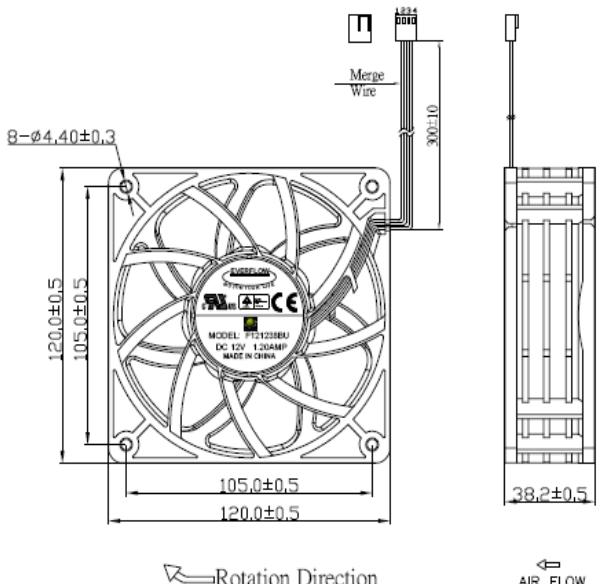

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

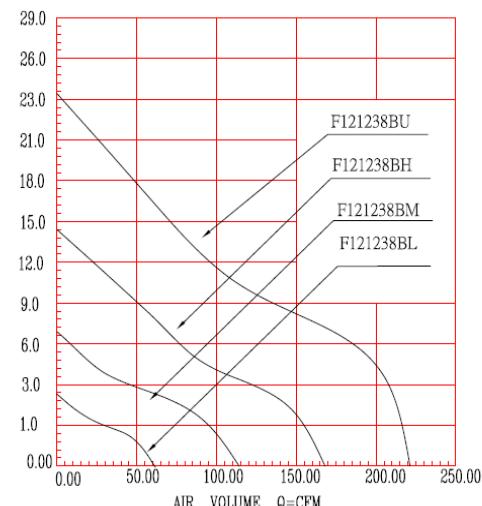

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121238BL	12	7~13.2	0.4	4.80	1700	60.30	1.71	2.33	30
F121238BM	12	7~13.2	0.48	5.76	3200	113.62	3.22	6.8	47
F121238BH	12	7~13.2	1.1	13.20	4700	169.10	4.80	14.49	57
F121238BU	12	7~13.2	2.3	27.60	6200	222.33	6.31	23.27	65

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

实做电流: 0.48A

实做电流: 1.10A



EVERFLOW

120×120×38MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12V/24V


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 340g

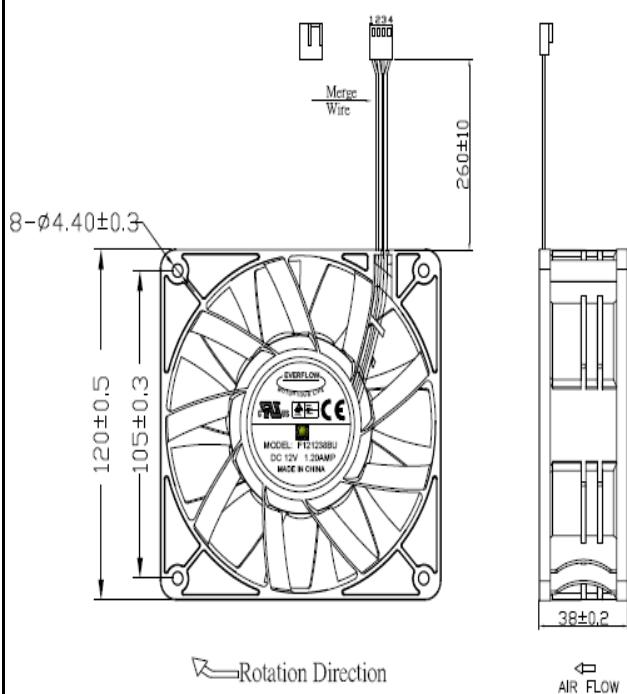

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH₂O)

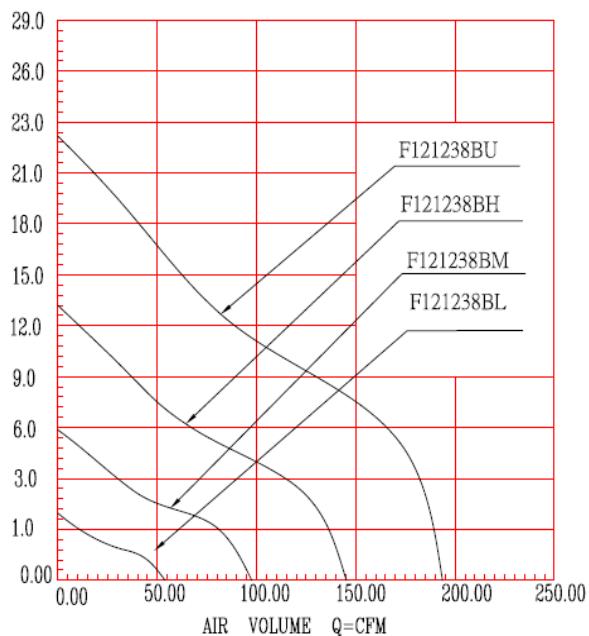

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121238BL	12	7~13.2	0.38	4.56	1200	53.66	1.52	1.74	29
F121238BM	12	7~13.2	0.45	5.40	2200	98.38	2.79	5.83	45
F121238BH	12	7~13.2	1.0	12.00	3200	145.90	4.14	13.24	54
F121238BU	12	7~13.2	2.5	30.00	4200	193.38	5.49	22.65	62

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.



EVERFLOW

140×140×25MM SERIES

Bearing Type: Two ball bearing

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 147g

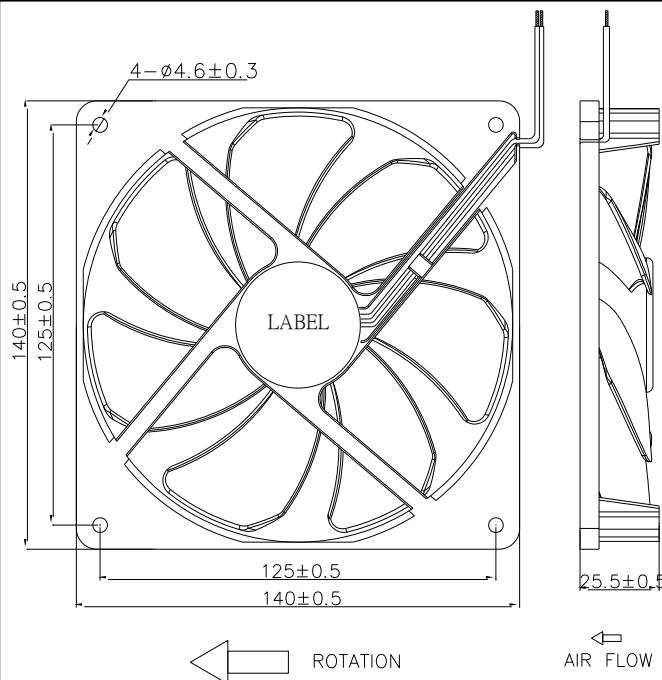

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE (mmH₂O)

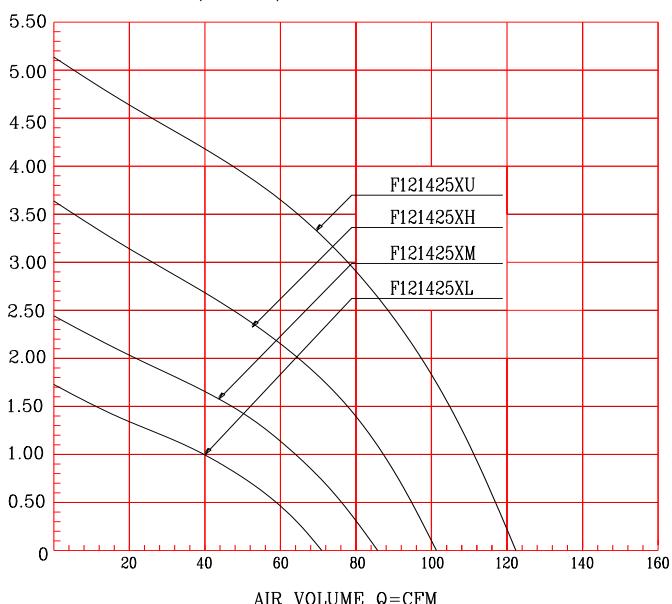

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R121425BL	12	7~13.2	0.20	2.40	1500	70.94	2.01	1.71	26.5
R121425BM	12	7~13.2	0.35	4.20	1800	85.13	2.41	2.46	33.1
R121425BH	12	7~13.2	0.60	7.20	2200	104.05	2.95	3.68	39.2
R121425BU	12	7~13.2	1.10	13.20	2600	122.97	3.48	5.14	43.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

140×140×25MM SERIES

Bearing Type: Two ball bearing

EBR

Rated Voltage 12v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 147g

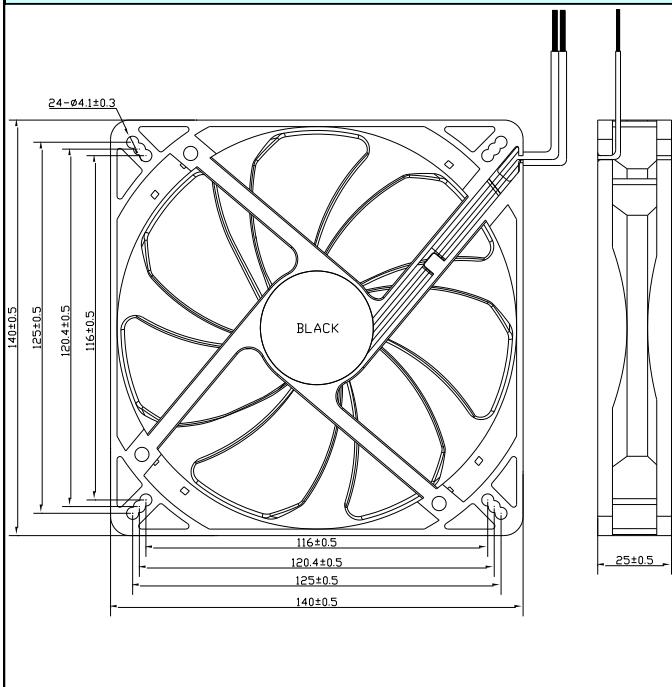

AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)
STATIC PRESSURE (mmH₂O)

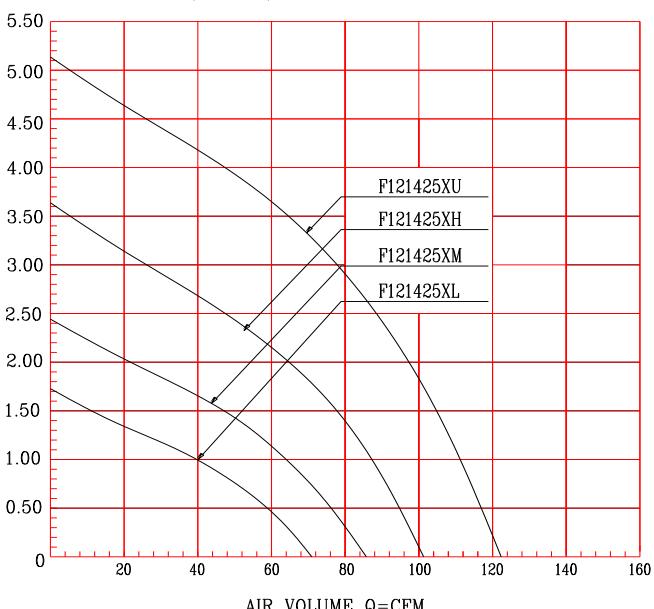

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
F121425BL	12	7~13.2	0.20	2.40	1500	70.94	2.01	1.71	26.5
F121425BM	12	7~13.2	0.35	4.20	1800	85.13	2.41	2.46	33.1
F121425BH	12	7~13.2	0.60	7.20	2200	104.05	2.95	3.68	39.2
F121425BU	12	7~13.2	1.10	13.20	2600	122.97	3.48	5.14	43.3
F121425SL	12	7~13.2	0.20	2.40	1500	70.94	2.01	1.71	26.5
F121425SM	12	7~13.2	0.35	4.20	1800	85.13	2.41	2.46	33.1
F121425SH	12	7~13.2	0.60	7.20	2200	104.05	2.95	3.68	39.2
F121425SU	12	7~13.2	1.10	13.20	2600	122.97	3.48	5.14	43.3

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.

EVERFLOW

180×180×17MM SERIES

Bearing Type: EBR

Rated Voltage 5v L.M.H.U


Material : Housing Plastic (UL : 94V-0)

Impeller Plastlc (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 131g

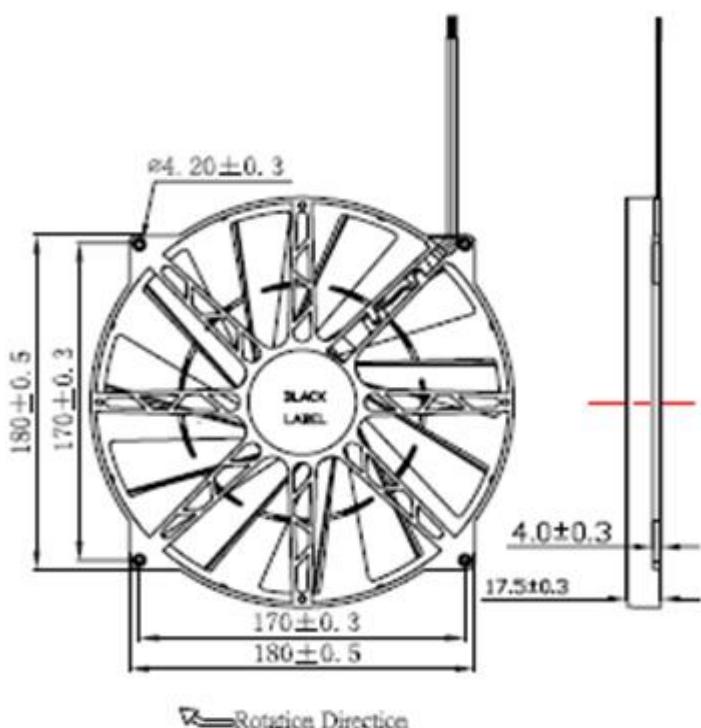

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

AIR PRESSURE (mmH₂O)

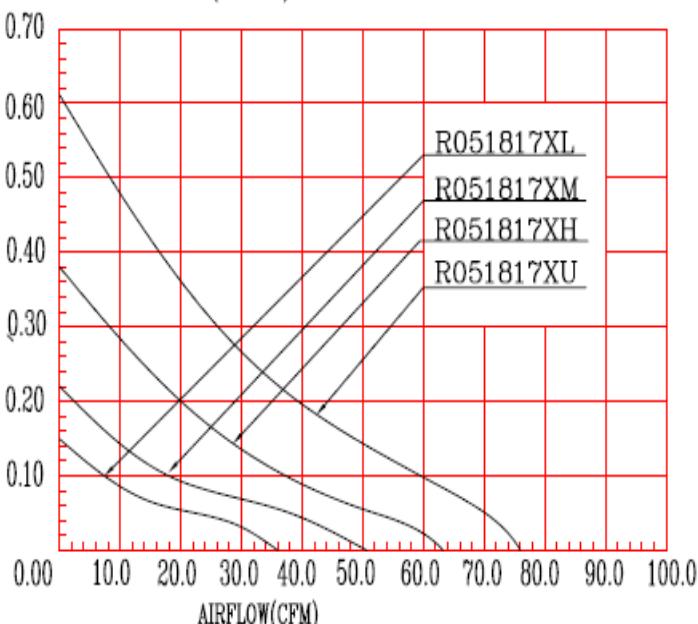

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Sound level dB(A)
						(CFM)	m ³ /min		
R051817SL	5	2.5~5.5	0.22	1.10	600	37.93	1.07	0.15	22.8
R051817SM	5	2.5~5.5	0.24	1.20	800	50.57	1.43	0.27	29
R051817SH	5	2.5~5.5	0.26	1.30	1000	63.21	1.79	0.38	33.8
R051817SU	5	2.5~5.5	0.30	1.50	1200	75.86	2.15	0.61	37.8

*Sound level measured at the distance of one meter from the axis of intake.

*Specifications are subject change without notice.